

# ABB BALDOR RELIANCE III

---

## Customer information packet

### CSPM3711T

10HP, 3500RPM, 3PH, 60HZ, 215TC, 3756M, TEFC, F

Class - None

Division - Not Applicable

**Specifications**

|                                       |                                          |
|---------------------------------------|------------------------------------------|
| <b>Enclosure</b>                      | TEFC                                     |
| <b>Frame</b>                          | 215TC                                    |
| <b>Frame Material</b>                 | Steel                                    |
| <b>Frequency</b>                      | 60.00 Hz                                 |
| <b>Haz Area Class and Group</b>       | None                                     |
| <b>Haz Area Division</b>              | Not Applicable                           |
| <b>Motor Letter Type</b>              | Three Phase                              |
| <b>Output @ Frequency</b>             | 10.000 HP @ 60 HZ                        |
| <b>Phase</b>                          | 3                                        |
| <b>Synchronous Speed @ Frequency</b>  | 3600 RPM @ 60 HZ                         |
| <b>Voltage @ Frequency</b>            | 230.0 V @ 60 HZ<br>460.0 V @ 60 HZ       |
| <b>Agency Approvals</b>               | WEEE<br>NEMA PREMIUM 4                   |
| <b>Ambient Temperature</b>            | 40 °C                                    |
| <b>Auxiliary Box</b>                  | NO AUXILLARY BOX                         |
| <b>Auxiliary Box Lead Termination</b> | None                                     |
| <b>Base Indicator</b>                 | Rigid                                    |
| <b>Bearing Grease Type</b>            | Polyrex EM (-20F +300F)                  |
| <b>Blower</b>                         | None                                     |
| <b>Current @ Voltage</b>              | 10.300 A @ 460.0 V<br>20.600 A @ 230.0 V |
| <b>Design Code</b>                    | A                                        |
| <b>Drip Cover</b>                     | No Drip Cover                            |
| <b>Duty Rating</b>                    | CONT                                     |
| <b>Efficiency @ 100% Load</b>         | 91.7 %                                   |
| <b>Electrically Isolated Bearing</b>  | Not Electrically Isolated                |
| <b>Feedback Device</b>                | NO FEEDBACK                              |
| <b>Front Shaft Indicator</b>          | None                                     |
| <b>Heater Indicator</b>               | No Heater                                |
| <b>High Voltage Full Load Amps</b>    | 10.3 a                                   |
| <b>Insulation Class</b>               | F                                        |


**Part Detail**

|                     |            |
|---------------------|------------|
| <b>Revision</b>     | B          |
| <b>Type</b>         | AC         |
| <b>Mech. spec.</b>  | 37T655     |
| <b>Base</b>         |            |
| <b>Status</b>       | PRD/A      |
| <b>Elec. spec.</b>  | 37WGR482   |
| <b>Layout</b>       | 37LYT655   |
| <b>Eff. date</b>    | 11-19-2025 |
| <b>CD Diagram</b>   | CD0005     |
| <b>Poles</b>        | 02         |
| <b>Leads</b>        | 9#12       |
| <b>Proprietary</b>  | False      |
| <b>Created date</b> | 11-29-2023 |


|                                      |                              |
|--------------------------------------|------------------------------|
| <b>Inverter Code</b>                 | <b>Inverter Duty</b>         |
| <b>KVA Code</b>                      | <b>K</b>                     |
| <b>Lifting Lugs</b>                  | <b>Standard Lifting Lugs</b> |
| <b>Locked Bearing Indicator</b>      | <b>Locked Bearing</b>        |
| <b>Max Speed</b>                     | <b>5400 rpm</b>              |
| <b>Motor Lead Quantity/Wire Size</b> | <b>9 @ 12 AWG</b>            |
| <b>Motor Lead Termination</b>        | <b>Flying Leads</b>          |
| <b>Motor Standards</b>               | <b>NEMA</b>                  |
| <b>Motor Type</b>                    | <b>3756M</b>                 |
| <b>Mounting Arrangement</b>          | <b>F1</b>                    |
| <b>Number of Poles</b>               | <b>2</b>                     |
| <b>Overall Length</b>                | <b>21.25 IN</b>              |
| <b>Power Factor</b>                  | <b>97</b>                    |
| <b>Product Family</b>                | <b>General Purpose</b>       |
| <b>Pulley End Bearing Type</b>       | <b>Ball</b>                  |
| <b>Pulley Face Code</b>              | <b>C-Face</b>                |
| <b>Pulley Shaft Indicator</b>        | <b>Standard</b>              |
| <b>Rodent Screen</b>                 | <b>None</b>                  |
| <b>RoHS Status</b>                   | <b>ROHS COMPLIANT</b>        |
| <b>Service Factor</b>                | <b>1.15</b>                  |
| <b>Shaft Diameter</b>                | <b>1.375 IN</b>              |
| <b>Shaft Ground Indicator</b>        | <b>No Shaft Grounding</b>    |
| <b>Shaft Rotation</b>                | <b>Reversible</b>            |
| <b>Shaft Slinger Indicator</b>       | <b>No Slinger</b>            |
| <b>Speed</b>                         | <b>3500 rpm</b>              |
| <b>Speed Code</b>                    | <b>Single Speed</b>          |
| <b>Starting Method</b>               | <b>Direct on line</b>        |
| <b>Thermal Device - Bearing</b>      | <b>None</b>                  |
| <b>Thermal Device - Winding</b>      | <b>None</b>                  |
| <b>Vibration Sensor Indicator</b>    | <b>No Vibration Sensor</b>   |
| <b>Winding Thermal 1</b>             | <b>None</b>                  |
| <b>Winding Thermal 2</b>             | <b>None</b>                  |

**Nameplate**


| NP4423A01A01L |               |         |     |      |      |               |       |      |     |    |       |  |  |
|---------------|---------------|---------|-----|------|------|---------------|-------|------|-----|----|-------|--|--|
| CAT #         | CSPM3711T     |         |     |      |      | WGT           | 187   | LBS  |     |    |       |  |  |
| SPEC          | 37T655R482    |         |     |      |      | ENCL          | TEFC  |      |     |    |       |  |  |
| SER #         |               |         |     |      |      | CC            | 010A  | IP   | 54  |    |       |  |  |
| HP            | 10            | MAG CUR |     |      |      | 5.8/2.9       |       |      |     |    |       |  |  |
| VOLTS         | 230/460       |         |     |      |      | NEMA NOM. EFF |       |      |     |    | 91.7  |  |  |
| AMPS          | 20.6/10.3     |         |     |      |      | PF            | 97    |      |     |    |       |  |  |
| RATING        | 40C AMB-CONT  |         |     |      |      |               |       |      |     |    |       |  |  |
| RPM           | 3500          |         |     |      |      | MAX RPM       |       | 5400 |     |    |       |  |  |
| FRAME         | 215TC         | HZ      | 60  | CODE |      | K             | CLASS |      | F   |    |       |  |  |
| SER.F.        | 1.15          | SF AMP  |     |      |      |               | PH    | 3    | DES | A  |       |  |  |
| DE            | 6307          |         | ODE |      | 6206 |               |       |      |     |    |       |  |  |
| LUBRICATION   | POLYREX EM    |         |     |      |      |               |       |      |     |    |       |  |  |
| ID LOGO       | INVERTER TYPE |         |     | VPWM |      | CHP           | 60    | TO   |     | 90 | 1.5:1 |  |  |
| ID LOGO       | WK2           | 0.512   | CT  | 6    | TO   | 60            | 10:1  |      |     |    |       |  |  |
| ID LOGO       | SL HZ         | 1.7     | VT  | 3    | TO   | 60            | 20:1  |      |     |    |       |  |  |
|               |               |         |     |      |      |               |       |      |     |    |       |  |  |
|               |               |         |     |      |      |               |       |      |     |    |       |  |  |
|               |               |         |     |      |      |               |       |      |     |    |       |  |  |
|               |               |         |     |      |      |               |       |      |     |    |       |  |  |
|               |               |         |     |      |      | QR            |       |      |     |    |       |  |  |
| YR            |               |         |     |      |      |               |       |      |     |    |       |  |  |



CD0005

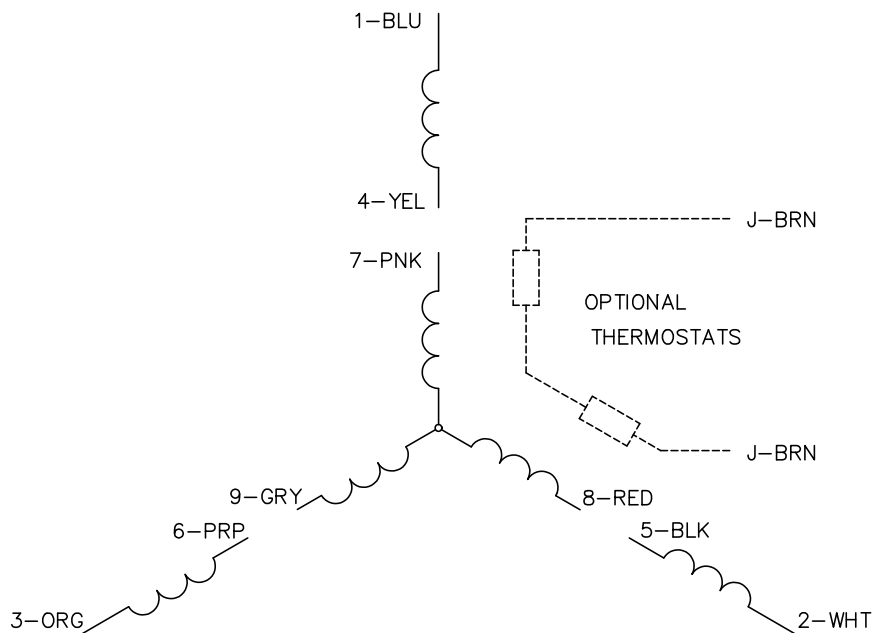


LOW VOLTAGE  
(2Y)



LINE

HIGH VOLTAGE  
(1Y)



LINE

**NOTES:**

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E BY: JLP REVISED: 01/19/99 10:15 TDR: 0171435

900000

FILE: AAA00005140

MDL: -

MTL: -

**BALDOR ELECTRIC Co.**

3PH, DV, 9 LEADS

CD0005