

ABB BALDOR RELIANCE III

Customer information packet

D2015R-BV

15HP, 1750RPM, DC, 2113ATZ, DPG-FV,

Specifications

Enclosure	DP
Frame	SC2113ATZ
Frame Material	Steel
Output Power	15.000 HP
Agency Approvals	CCSA US
Ambient Temperature	40 °C
Bearing Grease Type	Polyrex EM (-20F +300F)
Drip Cover	No Drip Cover
Feedback Device	NO FEEDBACK
Field Winding Type	STR SHUNT
Frame Prefix	SC
Heater Indicator	No Heater
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	28.38 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger

Part Detail

Revision	-
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	G6207C B
Layout	616002-001
Eff. date	04-13-2015
CD Diagram	406770-006
Poles	00
Leads	
Proprietary	False
Created date	04-09-2015

Nameplate

000613006HP									
CAT.NO.		SPEC NO.	T21T1359						
FR	SC 2113ATZ	HP	15	DUTY		CONT			
ENCL.	DP	RPM	1750/ 2300		S.F.	1.0			
ENCL MOD	FORCE VENT	VOLTS	240		INSUL		F		
MAX SAFE SPEED	4500	AMPS	56.00		AMB.		40		
FIELD DATA		SER.NO.							
WINDING	STR SHUNT	POWER CODE	D						
VOLTS	150	D.E. BRG.	50BC03J30X						
MAX AMPS @ 25 C	4.73	O.D.E. BRG.	45BC02J30X						
HOT AMPS	3.41/ 2.24	MIN. AMB.	0		TYPE		TR		
BRUSH:419904051AD									


616002-001

INDUSTRIAL DIRECT CURRENT MOTORS
AND GENERATORS - RPM III

ENCLOSURE: DRIP-PROOF FULLY-GUARDED,
SPLASHPROOF
MOUNTING: FOOT
METHOD OF DRIVE: COUPLED OR BELTED

COOLING: FORCE VENTILATED
WITH INTEGRAL
BLOWER AND MOTOR
ACCESSORIES: PROVISION FOR
TACHOMETER MOUNTING
ONLY WHEN SPECIFIED

FRAMES SC2113ATZ THRU LC2115ATZ

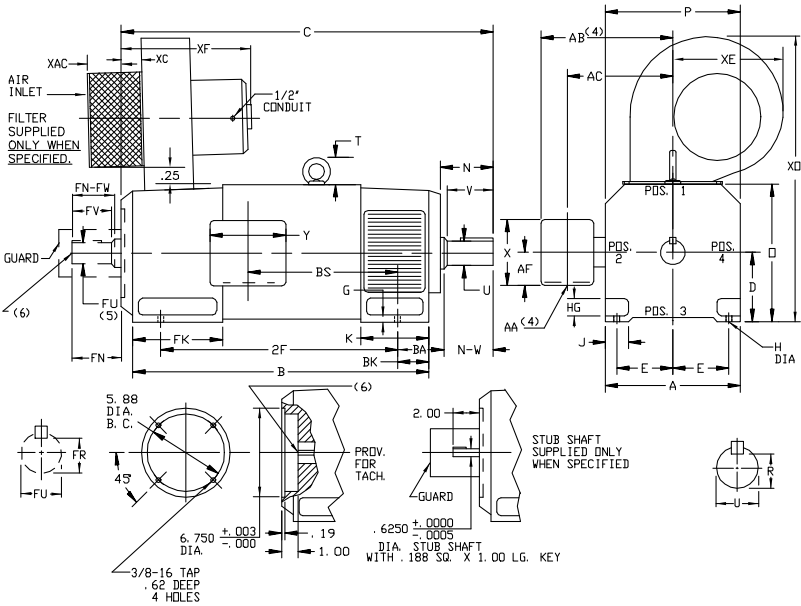

DIMENSIONS ARE IN INCHES

FRAME	XAC	XC	XE	XF	XO
SC2113ATZ-LC2115ATZ	7.75	2.25	10.00	16.00	22.75

FRAME	A	D(1)	E	G	H	HG	J	O	P	T	BA	K	FK	BK
SC2113ATZ-LC2115ATZ	10.25	5.25	4.25	.44	.44	1.38	1.75	10.44	10.31	2.08	3.50	5.19	6.81	2.38

FRAME	C(7)	B	BS	2F	N	N-W	U(2)	V	R(3)	SO.	LGTH.	FN	FN-FW	FU(2)	FV	FR(3)	SO.	LGTH.	LBS.
SC2113ATZ	28.38	22.50	11.38	18.00	4.00	3.75	1.875	3.50	1.591	.500	2.50	3.50	3.25	1.625	3.00	1.416	.375	2.25	345
MC2113ATZ	29.62	23.75	12.62	18.00	4.00	3.75	1.875	3.50	1.591	.500	2.50	3.50	3.25	1.625	3.00	1.416	.375	2.25	370
LC2113ATZ	31.25	25.38	14.25	18.00	4.00	3.75	1.875	3.50	1.591	.500	2.50	3.50	3.25	1.625	3.00	1.416	.375	2.25	400
MC2115ATZ	32.50	26.62	15.50	22.00	4.00	3.75	1.875	3.50	1.591	.500	2.50	3.50	3.25	1.625	3.00	1.416	.375	2.25	425
LC2115ATZ	35.25	29.38	18.25	22.00	4.00	3.75	1.875	3.50	1.591	.500	2.50	3.50	3.25	1.625	3.00	1.416	.375	2.25	480

- (1) "B" DIMENSION WILL NOT BE EXCEEDED. SHIMS UP TO .03 INCHES IN THICKNESS ARE USUALLY REQUIRED FOR COUPLED OR GEARED MACHINES.
(2) "U" AND "FU" VARY-----+.000 - .001
(3) "R" AND "FR" VARY-----+.000 - .015
(4) TERMINAL BOX VARIES WITH H.P. FOR DIMENSIONS "AA", "AB", "AC", "AF", "X" AND "Y", REFER TO BOX D/S. (STD. 609959-1, "X/P" 609959-2, MILL 609959-3)
(5) OPPOSITE DRIVE END SHAFT SUPPLIED ONLY WHEN SPECIFIED.
(6) MOTOR SHAFT TAPPED FOR SCREW-IN STUB SHAFT.
(7) WHEN THE MOTOR APPLICATION DOES NOT REQUIRE THE USE OF DPG, DRIVE END, ADD .25 TO "C" DIM. FOR BRACKET COVER.
TERMINAL BOX CAN BE ROTATED FOR LEAD OUTLET AT TOP, SIDES OR BOTTOM.
TERMINAL BOX LOCATED ON OPPOSITE SIDE WHEN F-2, V-1, V-4, V-5, V-7, OR C-1 MOUNTING IS SPECIFIED. BOX LOCATED ON TOP WHEN SPECIFIED.
BLOWER ASSEMBLY CAN BE LOCATED AT POSITIONS 1, 2, OR 4, EXCEPT BLOWER ASSEMBLY AND TERMINAL BOX CAN NOT BE LOCATED AT THE SAME POSITION.
MOTOR WEIGHT MAY VARY 15% FOR NON-STANDARD RATINGS AND/OR ACCESSORIES.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: LOADED TO BUS	VERSION: 00	TDR: 000000578087
REV. LTR: -	REVISED: 08:22:49 01/28/2011	BY: CONNAS
MTL: -		


BALDOR

DIMENSION DRAWING, SC2113ATZ - LC2115ATZ, DPP, FOOT MTG

SH 1 of 1

616002-001

609959-001

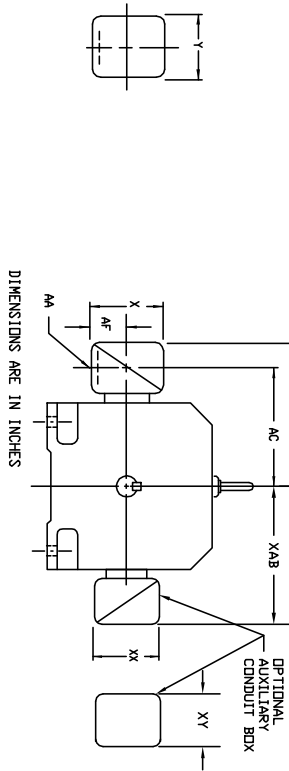INDUSTRIAL DIRECT CURRENT MOTORS
AND GENERATORS - RPM III
TERMINAL BOX DIMENSIONS
STANDARD SIZE AND ONE SIZE LARGER
FRAMES C2113ATZ THRU C2815ATZ

DIMENSIONS ARE IN INCHES

FRAME SIZE	MAX. AMPS	STANDARD SIZE						STEEL TERMINAL BOX DIMENSIONS						ONE SIZE LARGER					
		AK(1)	AB	AC	AF	X	Y	NUMBER	AK(1)	AB	AC	AF	X	Y	NUMBER	AK(1)	AB	AC	AF
C2113ATZ	40	3/4 & 1"	8.97	7.47	1.94	4.38	5.00	705028-1-R	1-1/4 & 1-1/2	10.03	8.03	2.50	5.50	6.12	705029-1-R	1-1/4 & 1-1/2	10.03	8.03	2.50
C2115ATZ	96	1-1/4 & 1-1/2	10.03	8.03	2.50	5.50	6.12	705029-1-R	2" & 2-1/2	11.16	8.41	3.19	7.00	7.62	705030-1-R	2" & 2-1/2	11.16	8.41	3.19
(2)	208	2" & 2-1/2	11.16	8.41	3.19	7.00	7.62	705030-1-R	2" & 2-1/2	11.16	8.41	3.19	7.00	7.62	705030-1-R	2" & 2-1/2	11.16	8.41	3.19
C2516ATZ	40	3/4 & 1"	10.03	8.53	1.94	4.38	5.00	705028-1-R	1-1/4 & 1-1/2	11.09	9.09	2.50	5.50	6.12	705029-1-R	1-1/4 & 1-1/2	11.09	9.09	2.50
C2514ATZ	96	1-1/4 & 1-1/2	11.09	9.09	2.50	5.50	6.12	705029-1-R	2" & 2-1/2	12.22	9.47	3.19	7.00	7.62	705030-1-R	2" & 2-1/2	12.22	9.47	3.19
(2)	208	2" & 2-1/2	12.22	9.47	3.19	7.00	7.62	705030-1-R	2" & 2-1/2	12.22	9.47	3.19	7.00	7.62	705030-1-R	2" & 2-1/2	12.22	9.47	3.19
C2816ATZ	155	2"	14.03	10.53	4.23	8.44	7.23	74874-R	3"	14.47	11.22	4.23	8.44	7.23	74874-R	3"	14.47	11.22	4.23
C2815ATZ	185	3"	14.47	11.22	4.23	8.44	7.23	74874-24-R	4"	15.91	11.84	5.38	10.56	9.00	706308-3-R	4"	18.72	13.47	7.00
(2)	269	4"	15.91	11.84	5.38	10.56	9.00	706308-3-R	5" (4)	18.72	13.47	7.00	12.75	15.00	706589-1-C	5" (4)	21.53	16.12	8.00

FRAME SIZE	MAX. AMPS	STANDARD SIZE						CAST IRON TERMINAL BOX DIMENSIONS						ONE SIZE LARGER					
		AK(3)	AB	AC	AF	X	Y	NUMBER	AK(3)	AB	AC	AF	X	Y	NUMBER	AK(3)	AB	AC	AF
C2113ATZ	18	3/4	10.03	8.03	2.50	5.00	5.75	705028-2-S	1"	10.03	8.03	2.50	5.00	5.75	705028-2-T	1"	10.03	8.03	2.50
C2115ATZ	40	1"	10.03	8.03	2.50	5.00	5.75	705028-2-T	1-1/2	10.97	8.53	3.00	6.00	7.00	705029-2-R	1-1/2	10.97	8.53	3.00
C2115ATZ	96	1-1/2	10.97	8.53	3.00	6.00	7.00	705029-2-R	2"	12.66	8.91	3.62	7.88	9.25	705030-2-R	2"	12.66	8.91	3.62
(2)	208	2"	10.97	8.53	3.00	6.00	7.00	705029-2-S	2-1/2	11.09	9.09	2.50	5.00	5.75	705028-2-S	2-1/2	11.09	9.09	2.50
C2516ATZ	40	3/4	11.09	9.09	2.50	5.00	5.75	705028-2-S	1"	12.03	9.59	3.00	6.00	7.00	705029-2-R	1-1/2	12.03	9.59	3.00
C2514ATZ	96	1-1/2	12.03	9.59	3.00	6.00	7.00	705029-2-R	2"	13.72	9.97	3.62	7.88	9.25	705030-2-R	2"	13.72	9.97	3.62
C2514ATZ	208	2"	12.78	10.34	3.00	6.00	7.00	75460-T	2-1/2	14.47	10.72	3.62	7.88	9.25	76708-R	3"	15.78	11.59	4.12
C2813ATZ	185	3"	14.47	10.72	3.62	7.88	9.25	76708-R	4"	15.78	11.59	4.12	9.50	10.50	76708-R	4"	18.59	13.34	7.00
C2815ATZ	269	4"	15.78	11.59	4.12	9.50	10.50	76708-R	5" (4)	18.59	13.34	7.00	12.75	15.00	76870-S	5" (4)	21.53	16.12	8.00

CONDUIT BOX DIMENSIONS WITH TERMINAL BOARDS (IEC TYPE BOX)

FRAME SIZE	AMPS	STANDARD SIZE						ONE SIZE LARGER					
		AB	AC	AF	X	Y	NUMBER	AB	AC	AF	X	Y	NUMBER
C210	100	10.71	8.98	2.72	7.48	7.48	706310-56-A	10.71	8.98	2.72	7.48	7.48	706310-56-A
	200	11.66	9.23	3.33	8.82	8.82	706310-56-B	11.66	9.23	3.33	8.82	8.82	706310-56-B
	400	11.30	9.57	2.72	7.48	7.48	706310-56-A	11.30	9.57	2.72	7.48	7.48	706310-56-A
C250	200	11.85	9.84	3.35	8.82	8.82	706310-56-B	11.85	9.84	3.35	8.82	8.82	706310-56-B
	400	17.48	12.75	6.20	14.39	14.39	706310-63-B & 706310-63G	17.48	12.75	6.20	14.39	14.39	706310-63-B & 706310-63G
	800	17.48	12.75	6.20	14.39	14.39	706310-63-B & 706310-63G	17.48	12.75	6.20	14.39	14.39	706310-63-B & 706310-63G
C280	200	12.60	10.59	3.76	8.82	8.82	706310-56-B	12.60	10.59	3.76	8.82	8.82	706310-56-B
	400	18.27	13.54	6.20	14.39	14.39	706310-63-B & 706310-63G	18.27	13.54	6.20	14.39	14.39	706310-63-B & 706310-63G
	800	18.27	13.54	6.20	14.39	14.39	706310-63-B & 706310-63G	18.27	13.54	6.20	14.39	14.39	706310-63-B & 706310-63G
	1600	18.27	13.54	7.68	15.35	15.35	706310-63-C	18.27	13.54	7.68	15.35	15.35	706310-63-C

FRAME SIZE	XAB	OPTIONAL AUXILIARY CONDUIT BOX DIMENSIONS (MAXIMUM)					
		XX	YY	PART NUMBER	FRAME SIZE	XAB	YY
C210	7.38	4.25	4.25	602007-26-A	C210	10.88	8.00
C250	8.44	4.25	4.25	602007-26-A	C250	11.88	8.00
C280	9.12	4.25	4.25	602007-26-A	C280	12.62	8.00

- (1) MAX CONDUIT
(2) RATES PROVIDED WITH DOUBLE KNUCKLE
(3) MAX PIPE LAP

- (4) TERMINAL BOX 76870-S AND 76870-98 EXTENDS BELOW MOTOR FEET
TERMINAL BOX 76870-S AND 76870-98 EXTENDS BELOW MOTOR FEET
DR - C-1 MOUNTING IS SPECIFIED. BOX LOCATED IN TOP WHEN SPECIFIED.
FOR "X"/"Y" TERMINAL BOX DIMENSIONS SEE 609959-2
FOR MILL TYPE TERMINAL BOX DIMENSIONS SEE 609959-3

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ADD 706310-63G C/BOX TO C250 AND C280 FRAMES

REV. LTR: A

VERSION: 01

TDR: 000000816512

FILE: \RGG\00021\153

REVISED: 03: 09: 09 09/06/2013

MTL: -

BY: RGGWT

BALDOR

DIMENSION SHEET

SH 1 of 1

609959-001

406770-006			406770-006	
CONNECTION DIAGRAM D-C MOTOR - STRAIGHT SHUNT W1 <NOTE 6> H1 H2 <NOTE 3> F1 A1 AX2 A2 F2 <CAUTION-SEE NOTE 1> SHUNT FIELD ARMATURE INTER-COIL P1 P2 <NOTE 4> THREE WIRE RTD TD TD1 TD2 TD3 <NOTE 5>				