

ABB BALDOR RELIANCE III

Customer information packet

D5003R

C1811ATZ, 3HP, 1750RPM, 500, 300, DPG, F1

Specifications

Armature Voltage	500 V
Base Speed	1750 rpm
Enclosure	DP
Field Voltage	300 V
Frame	C1811ATZ
Output Power	3.000 HP
Agency Approvals	CCSA US
Ambient Temperature	40 °C
Armature Current	5.2 a
Drip Cover	No Drip Cover
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Field Winding Type	STR. SHUNT
Frame Prefix	C
Heater Indicator	No Heater
Insulation Class	F
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	26.38 IN
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger
Thermal Device - Bearing	None

Part Detail

Revision	-
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	G2194B A
Layout	609980-001
Eff. date	01-02-2020
CD Diagram	406770-006
Poles	00
Leads	
Proprietary	False
Created date	12-27-2019


Nameplate

000613006HP									
CAT.NO.		SPEC NO.	T18S1333						
FR	C1811ATZ	HP	3	DUTY		CONT			
ENCL.	DP	RPM	1750/2300		S.F.	1.0			
ENCL MOD	GUARDED	VOLTS	500		INSUL		F		
MAX SAFE SPEED	5000	AMPS	5.20		AMB.		40		
FIELD DATA		SER.NO.							
WINDING	STR. SHUNT	POWER CODE	D						
VOLTS	300	D.E. BRG.	40BC02J30X						
MAX AMPS @ 25 C	.72	O.D.E. BRG.	30BC02J30X						
HOT AMPS	.57/.32	MIN. AMB.	0		TYPE		TR		
BRUSH:419904051E									

609980-001

INDUSTRIAL DIRECT CURRENT MOTORS
AND GENERATORS - RPM IIIMOUNTING: FOOT
METHOD OF DRIVE: COUPLED OR BELTEDENCLOSURE: DRIP-PROOF FULLY-GUARDED
SPLASHPROOF, TOTALLY ENCLOSEDCOOLING: SELF-VENTILATED
NON-VENTILATEDACCESSORIES: PROVISION FOR
TACHOMETER MOUNTING
ONLY WHEN SPECIFIED

FRAMES C180ATZ

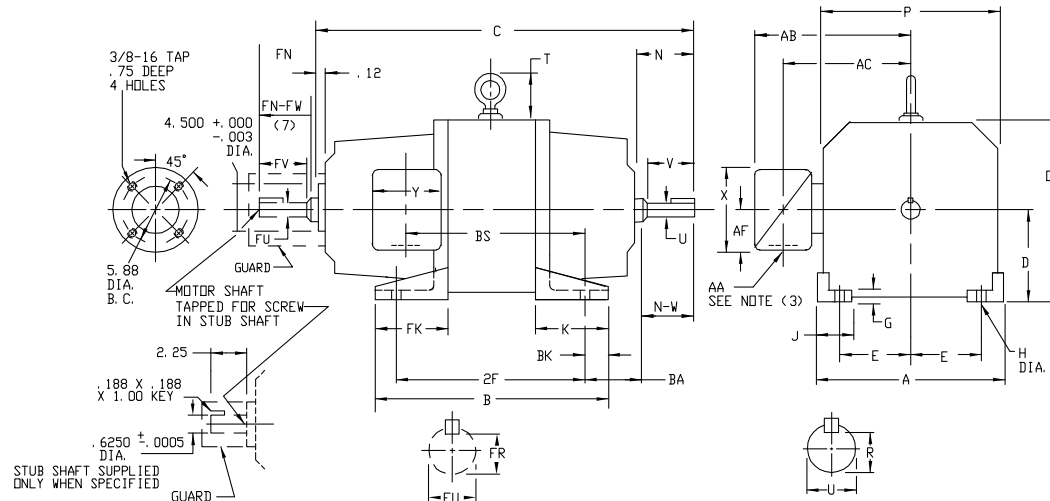

- (1) "D" DIMENSION WILL NOT BE EXCEEDED. SHIMS UP TO .06 INCHES IN THICKNESS ARE USUALLY REQUIRED FOR COUPLED OR GEARED MACHINES.
(2) "U" AND "FU" VARY +.0000 -.0005
(3) TERMINAL BOX CAN BE ROTATED FOR LEAD OUTLET AT TOP, SIDES OR BOTTOM.
FOR "X/P" TERMINAL BOX DIMENSIONS SEE 609989-1.
FOR MILL TYPE TERMINAL BOX DIMENSIONS SEE 609989-2.
(4) "R" AND "FR" VARY +.000, -.015.
(5) AA CONDUIT, TERMINAL BOX PROVIDED WITH DOUBLE KNOCKOUT.
(6) AA PIPE TAP
(7) OPPOSITE DRIVE END SHAFT SUPPLIED ONLY WHEN SPECIFIED.
(8) WHEN THE MOTOR APPLICATION DOES NOT REQUIRE THE USE OF DPG, DRIVE END, ADD .25 TO "C" DIM. FOR BRACKET COVER.
TERMINAL BOX LOCATED ON OPPOSITE SIDE WHEN F-2, V-1, W-4, W-5, W-7 OR C-1 MOUNTING IS SPECIFIED.
BOX LOCATED ON TOP WHEN SPECIFIED.

MOTOR WEIGHT MAY VARY 15% FOR NON-STANDARD RATINGS AND/OR ACCESSORIES.

IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.

DIMENSIONS ARE IN INCHES

FRAME	A	B(1)	E	G	H	J	D	P	T	BA	K	FK	BK
C1811ATZ-C1812ATZ	9.00	4.50	3.75	.31	.44	1.50	8.88	8.75	1.88	2.75	4.38	4.38	.50

FRAME	C(8)	B	BS	2F	DRIVE END SHAFT AND KEY							OPPOSITE DRIVE END SHAFT AND KEY (7)							WT.
					N	N-W	UC(2)	V	R(4)	SQ.	LGTH	FN	FN-FW	FUC(2)	FV	FR(4)	SQ.	LGTH.	LBS.
C1811ATZ	23.94	14.00	11.00	12.50	3.00	2.75	1.3750	2.50	1.201	.312	1.75	2.44	2.25	1.1250	2.00	.986	.250	1.38	175
C1812ATZ	25.44	15.50	12.50	14.00	3.00	2.75	1.3750	2.50	1.201	.312	1.75	2.44	2.25	1.1250	2.00	.986	.250	1.38	210

STEEL TERMINAL BOX DIMENSIONS

FRAME	MAX. AMPS	STANDARD SIZE						PART NUMBER	ONE SIZE LARGER						PART NUMBER
		AA(5)	AB	AC	AF	X	Y		AA(5)	AB	AC	AF	X	Y	
C180ATZ	40	3/4 & 1"	7.31	5.75	1.94	4.38	5.00	705028-1-R	1-1/4 & 1-1/2	8.31	6.31	2.50	5.50	6.12	705029-1-R
	96	1-1/4 & 1-1/2	8.31	6.31	2.50	5.50	6.12	705029-1-R	2" & 2-1/2	9.44	6.69	3.19	7.00	7.62	705030-1-R

CAST IRON TERMINAL BOX DIMENSIONS

FRAME	MAX AMPS	STANDARD SIZE					PART NUMBER	ONE SIZE LARGER					PART NUMBER	
		AA(6)	AB	AC	AF	X		Y	AA(6)	AB	AC	AF		X
C180ATZ	18	3/4	9.38	7.38	2.50	5.00	705028-2-S	1	9.38	7.38	2.50	5.00	5.75	705028-2-T
	40	1	9.38	7.38	2.50	5.00	705028-2-T	1-1/2	10.31	7.88	3.00	6.00	7.00	705029-2-R
	96	1-1/2	10.31	7.88	3.00	6.00	705029-2-R	2	10.31	7.88	3.00	6.00	7.00	705029-2-S

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: REVISE "D" DIM TOLERANCE	VERSION: 02	TDR: 000001158210
REV. LTR: B	FILE: \RGG\00031\202	REVISED: 01:10:53 01/13/2021
MTL: -	BY: RGGNAS	

BALDOR - RELIANCE®

DIMENSION DRAWING, C180ATZ, DPG, TENV, FOOT MTG.

SH 1 of 1

609980-001

