

ABB BALDOR RELIANCE III

Customer information packet

D5030RS-BV

30HP, 1750RPM, DC, 2512ATZ, DPG-FV,

Specifications

Enclosure	DP
Frame	SC2512ATZ
Frame Material	Steel
Output Power	30.000 HP
Agency Approvals	CCSA US
Ambient Temperature	40 °C
Bearing Grease Type	Polyrex EM (-20F +300F)
Drip Cover	No Drip Cover
Feedback Device	NO FEEDBACK
Field Winding Type	STAB SHUNT
Frame Prefix	SC
Heater Indicator	No Heater
Lifting Lugs	Standard Lifting Lugs
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	31.69 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Slinger Indicator	No Slinger



Part Detail

Revision	-
Type	DC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	G6706C A
Layout	609952-096
Eff. date	04-13-2015
CD Diagram	406770-001
Poles	00
Leads	
Proprietary	False
Created date	04-09-2015

Nameplate

000613006LP									
CAT.NO.		SPEC NO.	T25T1342						
FR	SC 2512ATZ	HP	30	DUTY		CONT			
ENCL.	DP	RPM	1750/ 2300		S.F.	1.0			
ENCL MOD	FORCE VENT	VOLTS	500		INSUL		F		
MAX SAFE SPEED	4500	AMPS	51.00		AMB.		40		
FIELD DATA		SER.NO.							
WINDING	STAB SHUNT	POWER CODE	C						
VOLTS	300	D.E. BRG.	60BC03J30X						
MAX AMPS @ 25 C	2.84	O.D.E. BRG.	50BC02J30X						
HOT AMPS	2.05/ 1.26	MIN. AMB.	0		TYPE		TR		
BRUSH:419904051AD; AIR BAFFLED									

609952-096

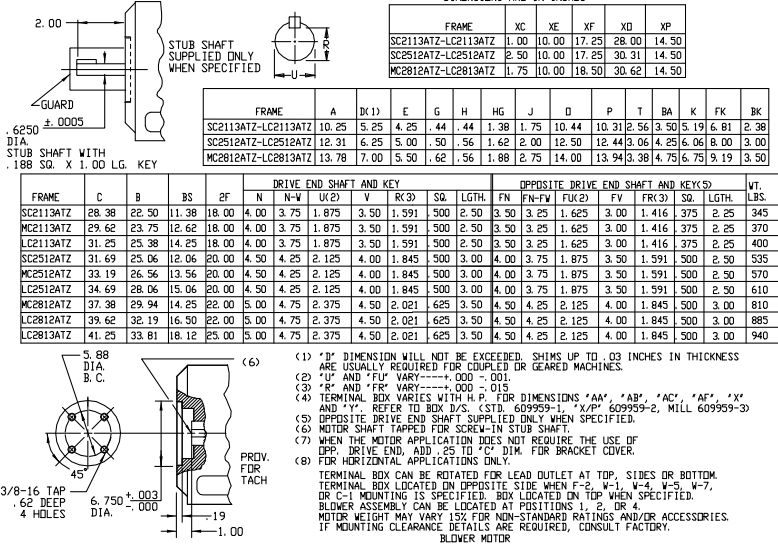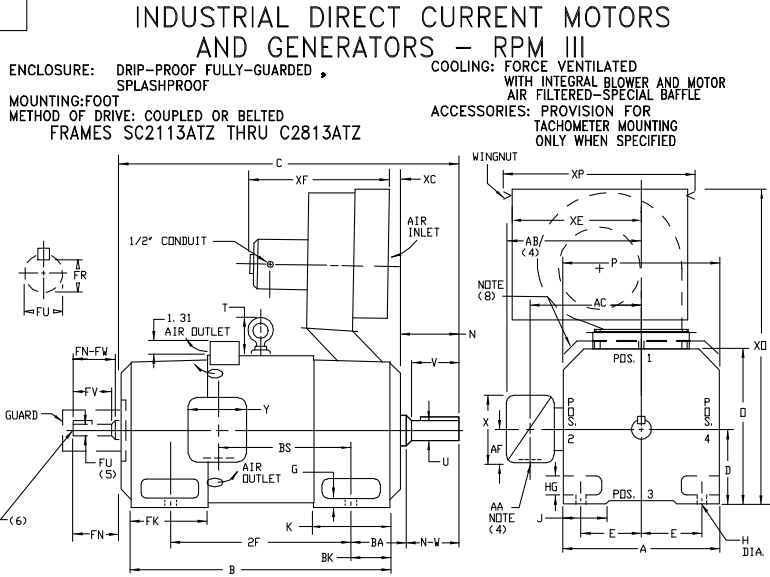


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: UPDATE FRAME SIZE		
REV. LTR: A	VERSION: 01	TDR: 000000845571
FILE: \RGG\00015\585	REVISED: 10:46:47 03/25/2014	BY: RGGWT
MTL: -		

BALDOR	
DIMENSION DRAWING, SC2113ATZ - C2813ATZ, DPP, FOOT MTG.	
SH 1 of 1	

609952-096

609959-001

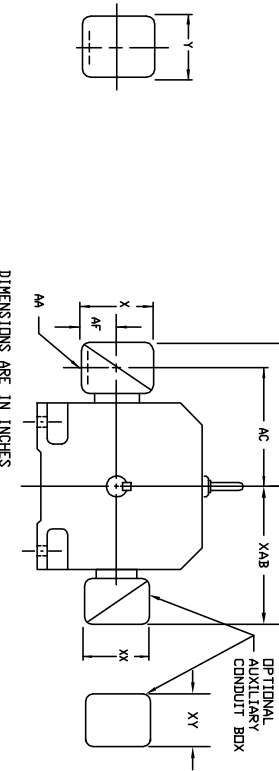INDUSTRIAL DIRECT CURRENT MOTORS
AND GENERATORS - RPM III
TERMINAL BOX DIMENSIONS
STANDARD SIZE AND ONE SIZE LARGER
FRAMES C2113ATZ THRU C2815ATZ

DIMENSIONS ARE IN INCHES

STEEL TERMINAL BOX DIMENSIONS															
FRAME SIZE	MAX. AMPS	STANDARD SIZE					END SIZE LARGER								
		AK(1)	AB	AC	AF	X	Y	AA(1)	AB	AC	AF	Y			
C2113ATZ	40	3/4 & 1"	8.97	7.47	1.94	4.38	5.00	705028-1-R	1-1/4 & 1-1/2	10.03	8.03	2.50	5.50	6.12	705029-1-R
C2115ATZ	96	1-1/4 & 1-1/2	10.03	8.03	2.50	5.50	6.12	705029-1-R	2" & 2-1/2	11.16	8.41	3.19	7.00	7.62	705030-1-R
(2)	208	2" & 2-1/2	11.16	8.41	3.19	7.00	7.62	705030-1-R	2" & 2-1/2	11.16	8.41	3.19	7.00	7.62	705030-1-R
C2516ATZ	40	3/4 & 1"	10.03	8.53	1.94	4.38	5.00	705028-1-R	1-1/4 & 1-1/2	11.09	9.09	2.50	5.50	6.12	705029-1-R
C2514ATZ	96	1-1/4 & 1-1/2	11.09	9.09	2.50	5.50	6.12	705029-1-R	2" & 2-1/2	12.22	9.47	3.19	7.00	7.62	705030-1-R
(2)	208	2" & 2-1/2	12.22	9.47	3.19	7.00	7.62	705030-1-R	2" & 2-1/2	12.22	9.47	3.19	7.00	7.62	705030-1-R
C2816ATZ	155	2"	14.03	10.53	4.25	8.44	7.25	74874-R	3"	14.47	11.22	4.25	8.44	7.25	74874-24-R
C2815ATZ	185	3"	14.47	11.22	4.25	8.44	7.25	74874-24-R	4"	15.91	11.84	5.38	10.56	9.00	706308-3-R
(2)	259	4"	15.91	11.84	5.38	10.56	9.00	706308-3-R	5" (4)	18.72	13.47	7.00	12.75	15.00	706589-1-C

CAST IRON TERMINAL BOX DIMENSIONS															
FRAME SIZE	MAX. AMPS	STANDARD SIZE						ONE SIZE LARGER							
		AK(3)	AB	AC	AF	X	Y	AA(3)	AB	AC	AF	X	Y		
C2113ATZ	18	3/4	10.03	8.03	2.50	5.00	5.75	705028-2-S	1"	10.03	8.03	2.50	5.00	5.75	705028-2-T
C2115ATZ	40	1"	10.03	8.03	2.50	5.00	5.75	705028-2-T	1-1/2	10.97	8.53	3.00	6.00	7.00	705029-2-R
C2115ATZ	96	1-1/2	10.97	8.53	3.00	6.00	7.00	705029-2-R	2"	12.66	8.91	3.62	7.88	9.25	705030-2-R
(2)	208	2"	10.97	8.53	3.00	6.00	7.00	705029-2-S	2-1/2	12.66	8.91	3.62	7.88	9.25	705030-2-R
C2516ATZ	18	3/4	11.09	9.09	2.50	5.00	5.75	705028-2-S	1"	11.09	9.09	2.50	5.00	5.75	705028-2-T
C2514ATZ	40	1"	11.09	9.09	2.50	5.00	5.75	705028-2-T	1-1/2	12.03	9.59	3.00	6.00	7.00	705029-2-R
C2514ATZ	96	1-1/2	12.03	9.59	3.00	6.00	7.00	705029-2-R	2"	12.03	9.59	3.00	6.00	7.00	705029-2-S
(2)	208	2"	12.03	9.59	3.00	6.00	7.00	705029-2-S	2-1/2	13.72	9.97	3.62	7.88	9.25	705030-2-R
C2813ATZ	155	2"	12.78	10.34	3.00	6.00	7.00	75460-T	3"	14.47	10.72	3.62	7.88	9.25	76700-R
C2815ATZ	185	3"	14.47	10.72	3.62	7.88	9.25	76700-R	4"	15.78	11.59	4.12	9.50	10.50	76700-R
C2815ATZ	259	4"	15.78	11.59	4.12	9.50	10.50	76700-R	5" (4)	18.59	13.34	7.00	12.75	15.00	76870-S

CONDUIT BOX DIMENSIONS WITH TERMINAL BOARDS (IEC TYPE BOX)

CONDUIT BOX DIMENSIONS WITH TERMINAL BORDERS (IEC TYPE BOX)									
STANDARD SIZE									
FRAME SIZE	AMPS	AB	AC	AF	X	AA	Y	PART NUMBER	PART NUMBER
C210	100	10.71	8.98	2.72	7.48	--	7.48	706310-56-A	706310-225-R
	200	11.66	9.25	3.35	8.82	--	8.82	706310-56-B	706310-226-R
	100	11.30	9.57	2.72	7.48	--	7.48	706310-56-A	706310-225-R
C250	200	11.85	9.84	3.35	8.82	--	8.82	706310-56-B	706310-226-R
	400	17.48	12.75	6.20	14.39	--	14.39	706310-63-B & 706310-63G	706310-63-B & 706310-63G
	800	17.48	12.75	6.20	14.39	--	14.39	706310-63-B & 706310-63G	706310-63-B & 706310-63G
C280	200	12.60	10.59	3.76	8.82	--	8.82	706310-56-B	706310-226-R
	400	18.27	13.54	6.20	14.39	--	14.39	706310-63-B & 706310-63G	706310-63-B & 706310-63G
	800	18.27	13.54	6.20	14.39	--	14.39	706310-63-B & 706310-63G	706310-63-B & 706310-63G
	1600	18.27	13.54	7.68	15.35	--	15.35	706310-63-C	706310-63-C

OPTIONAL AUXILIARY CONDUIT BOX DIMENSIONS (MAXIMUM)							
FRAME SIZE	XAB	XY	PART NUMBER	FRAME SIZE	XAB	XY	PART NUMBER
C210	7.38	4.25	602007-26-A	C210	10.88	8.00	706310-3-B
C250	8.44	4.25	602007-26-A	C250	11.88	8.00	706310-3-B
C280	9.12	4.25	602007-26-A	C280	12.62	8.00	706310-3-B

(1) MAX CONDUIT
(2) RATES PROVIDED WITH DOUBLE KNUCKLE
(3) MAX PIPE LAP(4) TERMINAL BOX 76870-S AND 76870-98 EXTENDS BELOW MOTOR FEET
TERMINAL BOX 76870-S AND 76870-98 EXTENDS BELOW MOTOR FEET
DR C-1 MOUNTING IS SPECIFIED. BOX LOCATED IN TOP WHEN SPECIFIED.
FOR "X"/TERMINAL BOX DIMENSIONS SEE 609959-2
FOR MILL TYPE TERMINAL BOX DIMENSIONS SEE 609959-3

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: ADD 706310-63G C/BOX TO C250 AND C280 FRAMES	
REV. LTR: A	VERSION: 01
FILE: \RGG\00021\153	REVISED: 03: 09: 09 09/06/2013
MTL: -	BY: RGGWT


BALDOR

DIMENSION SHEET

SH 1 of 1

609959-001

065564-004

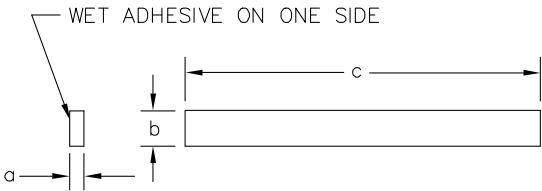

SYM	MAKE FROM	a	b	c	REMARKS
	065564-004				
A	X	1/8	5/8	24*	TERMBX & CVR 180AT-250AT
B	X	1/8	5/8	37 1/2*	TERMBX & CVR 280AT-320AT
C	Y	1/4	5/8	44 1/2Δ	FILTER TO HOUSING GASKET
D	X	1/8	5/8	170"	TEAO HEAT EXCH.
E	Y	1/4	5/8	72"Δ	TERMBX & CVR

SYM	MAT'L SPEC	a	b	c
X	46024-XV	1/8	5/8	* 50' ROLL; WET ADHESIVE ON ONE SIDE
Y	46024-XV	1/4	5/8	* 50' ROLL; WET ADHESIVE ON ONE SIDE

Δ RELIANCE WILL CUT AND MOUNT ON FILTER HOUSING PER
ASSEMBLY DRAWING 603989-2.

* PROD. NOTE: WHEN ORDERING THRU PURCHASING
ORDER AS 50 FT. ROLLS, WET ADHESIVE ON ONE
SIDE. RELIANCE WILL CUT AND MOUNT ON COVER.
PER INSTRUCTIONS ON COVER DRAWINGS.

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: CHANGE DESCRIPTION ON TITLE BLOCK		
REV. LTR: C	VERSION: 03	TDR: 000000571980
FILE: \RGG\00000\220	REVISED: 10:54:04 12/16/2010	BY: RGGWT
MTL: -		

BALDOR
GASKET,STRIP,CLOSED CELL NEOPRENE
SH 1 of 1

065564-004

