

ABB BALDOR RELIANCE III

Customer information packet

ECP4313T-5

75HP, 3555RPM, 3PH, 60HZ, 365TS, TEFC, F1

Class - None

Division - Division II

Specifications

Enclosure	TEFC
Frame	365TS
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	75.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	10-60
Current @ Voltage	65.500 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	65.5 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	F
Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	3 @ 4 AWG

Part Detail

Revision	D
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG1546
Layout	617428-298
Eff. date	10-24-2024
CD Diagram	416820-036
Poles	02
Leads	3#4
Proprietary	False
Created date	10-01-2019

Motor Standards	NEMA
Motor Type	A36068M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	31.35 IN
Power Factor	92
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3555 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP2496L	
MOBIL POLYREX EM	


000901002AAA	
IP55 CONSTRUCTION	

NP3238

CAT NO	ECP4313T-5			SPEC NO.		A36-7806-1546			
HP	75	AMPS	65.5		VOLTS		575	DESIGN	B
FRAME	365TS	RPM	3555	HZ	60	AMB	40	SF	1.15
D.E. BRG.DATA	6313		O.D.E. BRG.DATA			6313		PH	3
D.E. BRG.	65BC03J30X			TYPE	P	ENCL	TEFC	CODE	F
O.D.E. BRG.	65BC03J30X			POWER FACTOR			92	NEMA NOM EFFICIENCY	
3/4 LOAD EFF.	93.8		MAX CORR KVAR			6.5		GUARANTEED EFFICIENCY	
TEMP CODE	T3	TEMP =	200						
CHP HZ	60-75		CT HZ	10-60		VT HZ	0-60		
INVERTER-TEMP-CODE	T3								
SER.NO.				MOTOR WEIGHT					

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	365TSD	75	P	3/60	3555	575
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
65.5	CONT	40/F	1.15	B	F	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
-	418141005TE	---	---	.116		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	12.3	3600	12.6	0	
1/4	18.8	19.9	3589	79.0	89.2	
2/4	37.5	33.2	3578	91.0	93.0	
3/4	56.2	48.8	3567	92.1	93.8	
4/4	75.0	65.5	3555	91.6	93.6	
5/4	93.8	82.7	3542	91.2	93.1	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	212	235	420	
PULL UP		2130	178	197	357	
BREAKDOWN		3395	256	284	237	
FULL LOAD		3555	100	111	65.5	
AMPERES SHOWN FOR 575. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE REMARKS: TYPICAL DATA XE MOTOR-NEMA NOM. EFF. 93.6 %						
		DR. BY	W. L. SMITH	A-C MOTOR PERFORMANCE DATA		
		CK. BY	C. E. JAMISON			
		APP. BY	W. L. SMITH			
		DATE	10/05/17			
			A36WG1546-R013 ISSUE DATE 01/22/21			

REL S.O.	RPM 3555	S.F. 1.15	ROTOR 418141005TE
FRAME 365TSD	VOLTS 575	NEMA DESIGN B	TEST S.O. TYPICAL DATA
HP 75	AMPS 65.5	CODE LETTER F	TEST DATE ---
TYPE P	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25 °C .116
PHASE/HERTZ 3/60	AMB °C/INSUL 40/F	E/S -	OHMS (BETWEEN LINES)

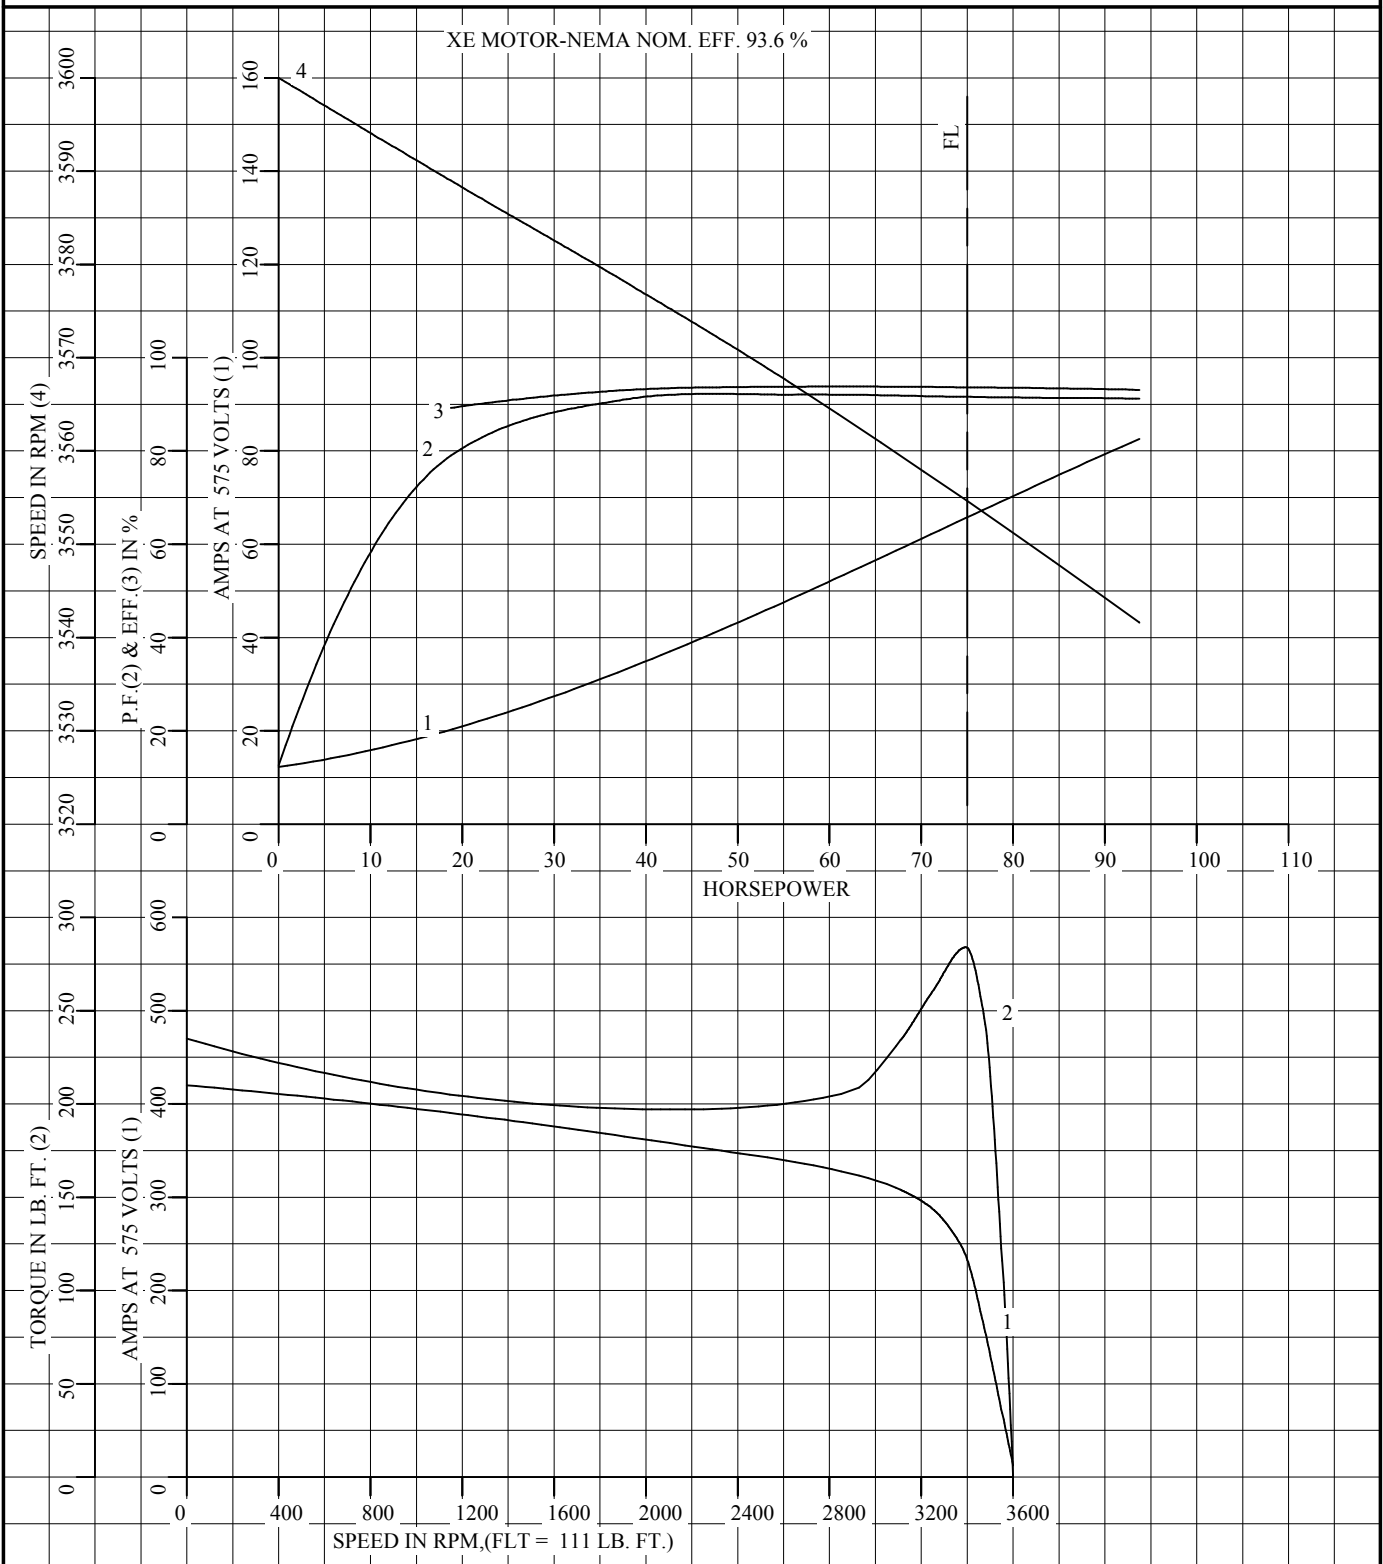

AMPERES SHOWN FOR 575 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR
A MEMBER OF THE ABB GROUP


DR. BY W. L. SMITH
CK. BY C. E. JAMISON
APP. BY W. L. SMITH
DATE 10/05/17

**A-C MOTOR
PERFORMANCE
CURVES**

A36WG1546-R013

ISSUE DATE 01/22/21 Page 8 of 12

REL. S.O.	RPM 3555	S.F. 1.15	ROTOR 418141005TE
FRAME 365TSD	VOLTS 575	NEMA DESIGN B	TEST S.O. TYPICAL DATA
HP 75	AMPS 65.5	CODE LETTER F	TEST DATE ---
TYPE P	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25 °C .116
PHASE/HERTZ 3/60	AMB °C/INSUL 40/F	E/S -	OHMS (BETWEEN LINES)

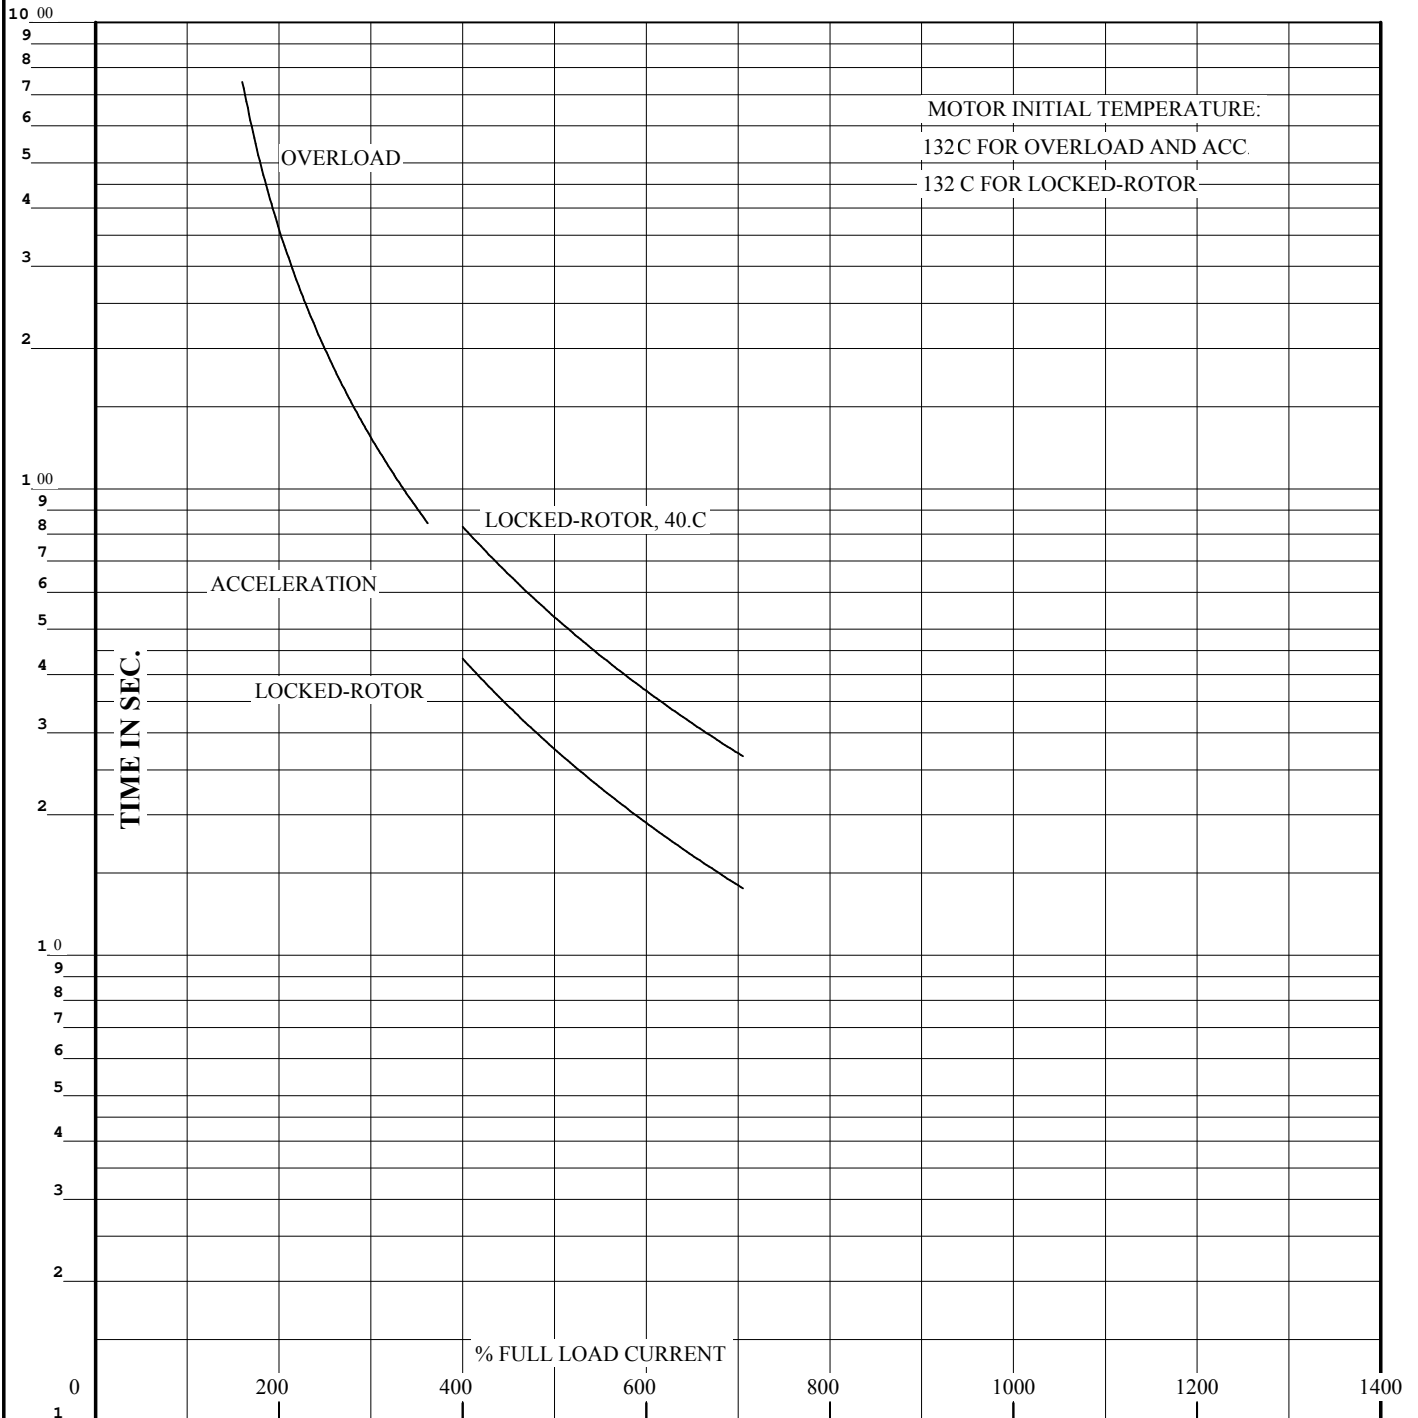

THERMAL LIMIT CURVE

REMARKS: XE MOTOR-NEMA NOM. EFF. 93.6 %

AMPERES SHOWN FOR 575 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.





DR. BY	W. L. SMITH
CK. BY	C.E.JAMISON
APP. BY	W. L. SMITH
DATE	10/05/17

**A-C MOTOR
PERFORMANCE
CURVES**

A36WG1546-R013


ISSUE DATE 01/22/21 Page 9 of 12

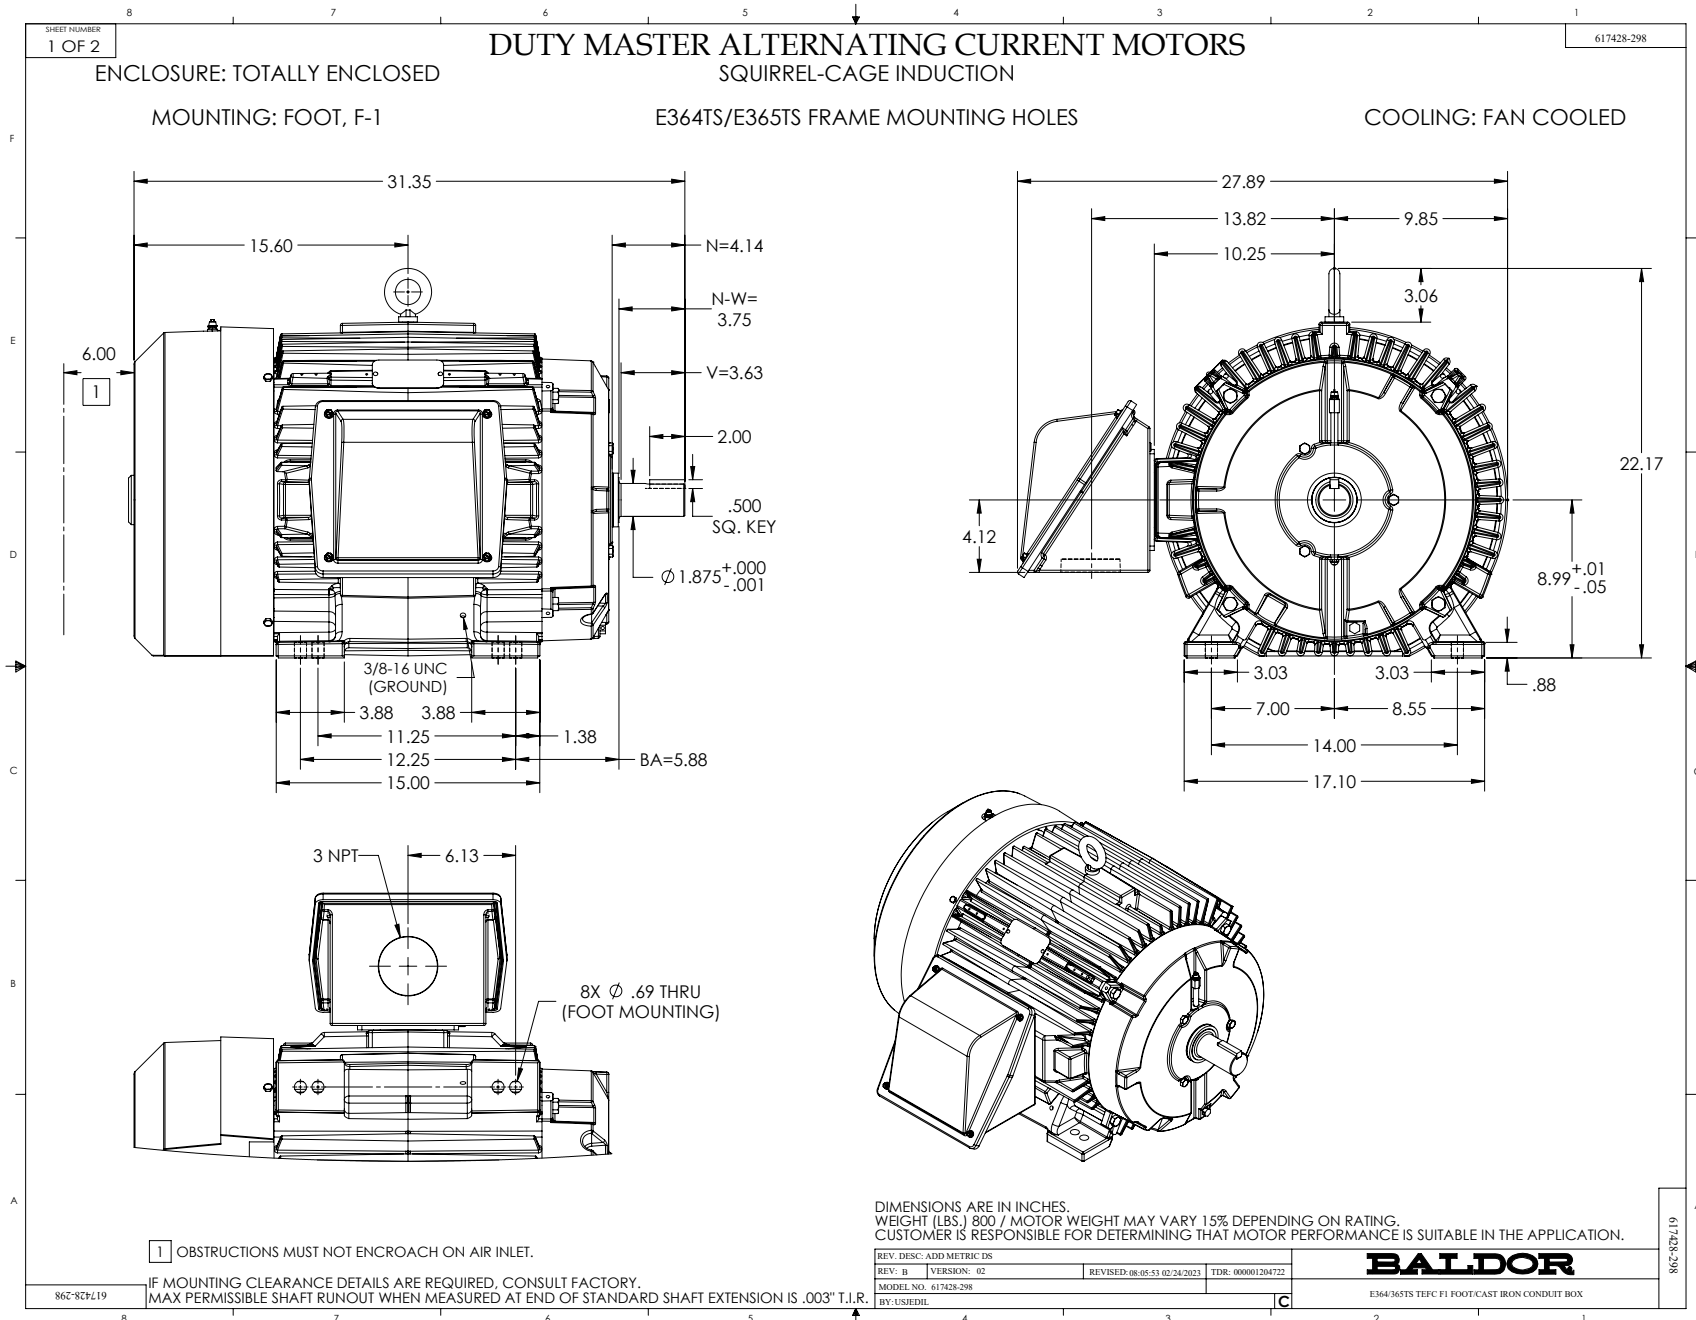

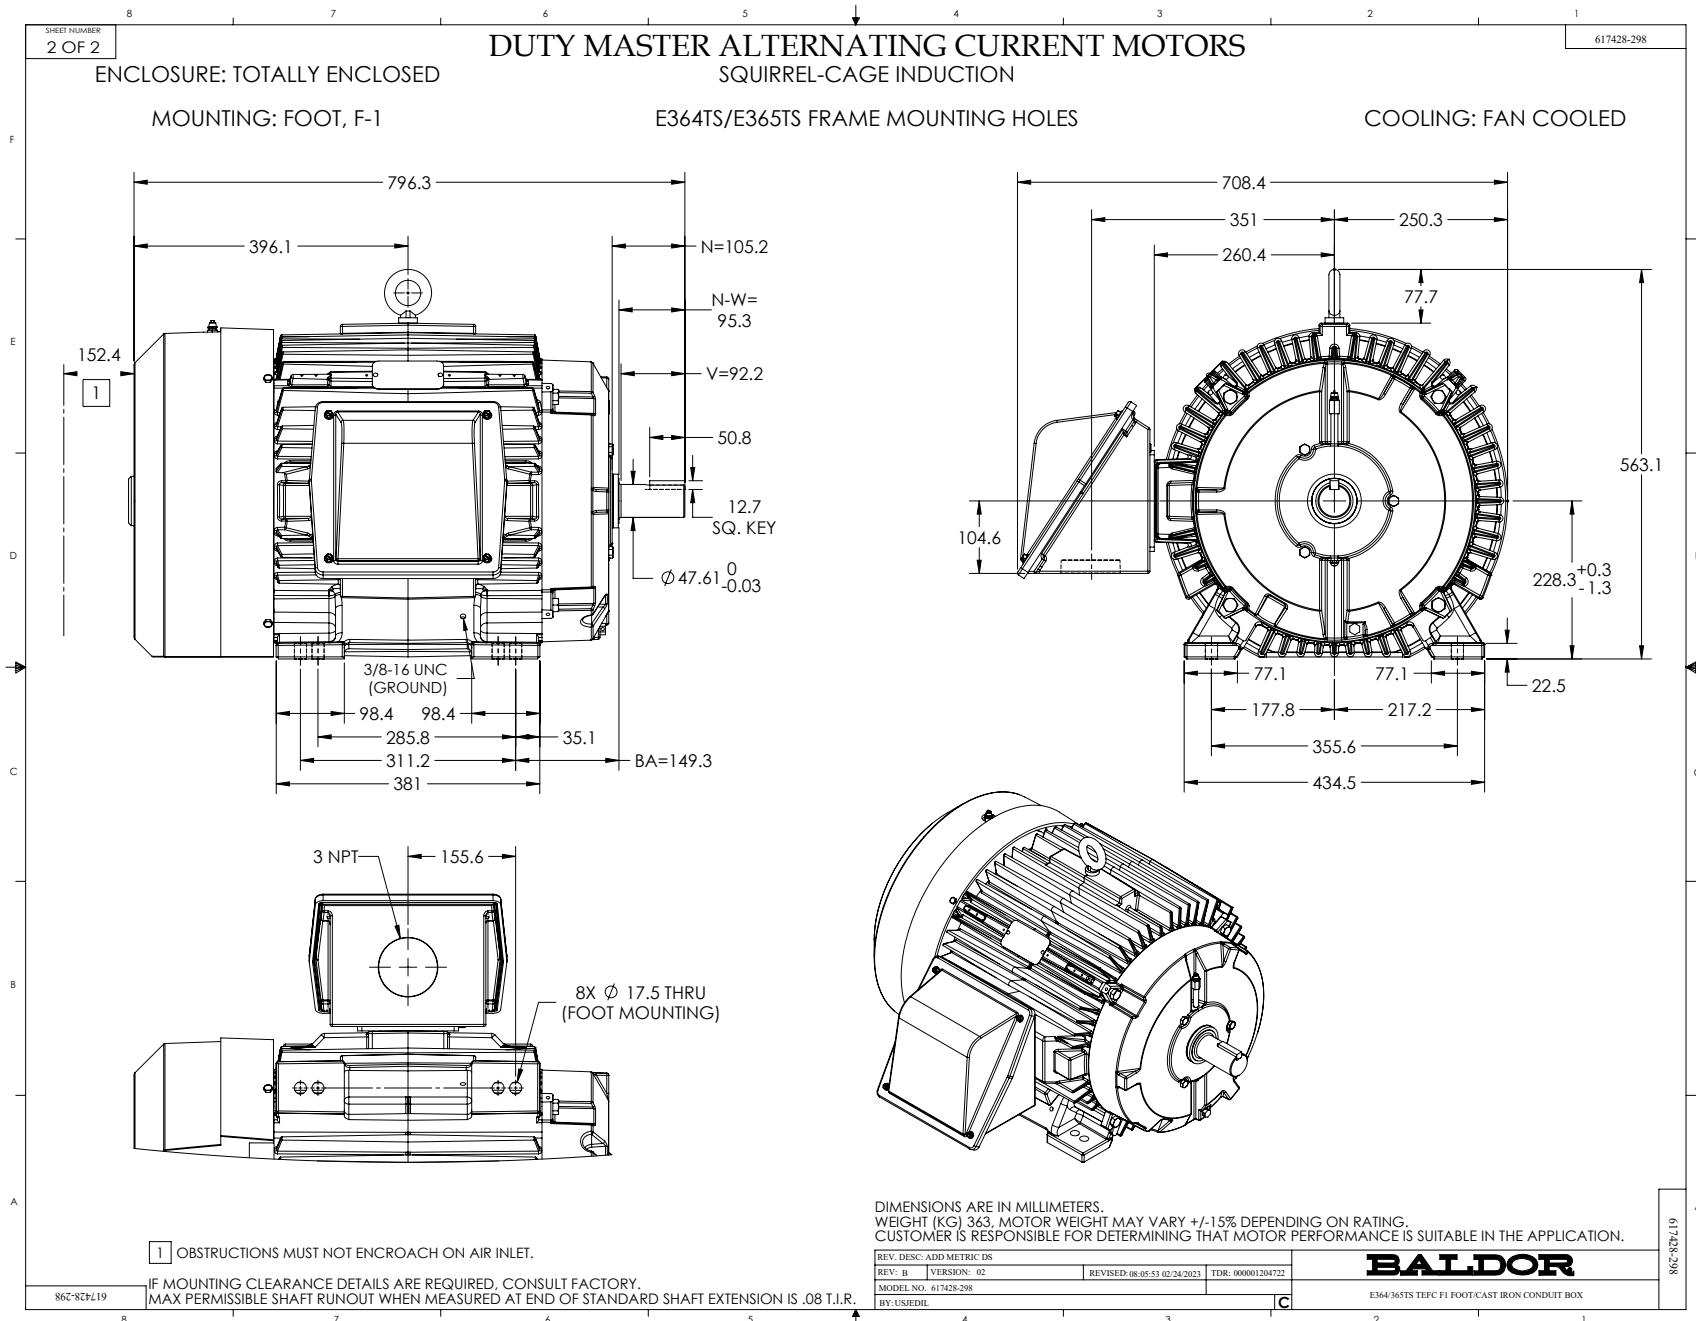

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

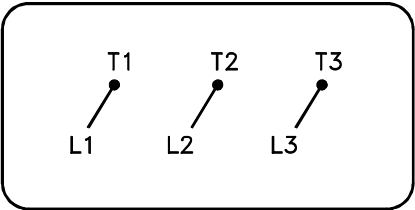

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1