

ABB BALDOR RELIANCE III

Customer information packet

ECP84410TR-4

125HP, 1785, 3PH, 60HZ, 444T, TEFC, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	444T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	125.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Mobil SHC 220 (Athens Only)
Constant Torque Speed Range	10-60
Current @ Voltage	144.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.4 %
Enclosure Modification	841
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	144.0 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	IP56
KVA Code	G

Part Detail

Revision	H
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG3870
Layout	617434-660
Eff. date	12-10-2025
CD Diagram	416820-036
Poles	04
Leads	3#1/0
Proprietary	False
Created date	08-06-2019

Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	3 @ 1/0 AWG
Motor Standards	None
Motor Type	A44076M
Mounting Arrangement	F1
No Load Current	44.8 a
Number of Poles	4
Overall Length	44.97 IN
Power Factor	85
Pulley End Bearing Type	Roller
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Phase Seq-Std Rot (CCWODE)
Shaft Slinger Indicator	No Slinger
Speed	1785 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP4566															
CAT NO	ECP84410TR-4			SPEC NO.		A44-9303-3870									
HP	125	AMPS		144	VOLTS		460		DESIGN		B				
FRAME SIZE	444T	RPM		1785	HZ		60	AMB		40	SF		1.15		
D.E. BRG.DATA	NU222			O.D.E. BRG.DATA		6318			PH	3	DUTY		CONT	INSUL.CLASS	F
D.E. BRG.	110RU02M30X			TYPE		ENCL	TEFC		CODE		G				
O.D.E. BRG.	90BC03J30X			POWER FACTOR			85		NEMA-NOM-EFFICIENCY				95.4		
3/4 LOAD EFF.	95.8	IP	56	MAX CORR KVAR				27		GUARANTEED EFFICIENCY				94.5	
TEMP CODE	T3	TEMP =		200											
CHP HZ	60-90	CT HZ		10-60	VT HZ		0-60								
INVERTER-TEMP-CODE	T3														
SER.NO.				MOTOR WEIGHT											

000613007EX				
CAT NO	ECP84410TR-4	SPEC NO.	A44-9303-3870	
NO. ROTOR BARS	58	GREASE TYPE	MOBIL SHC 220	
NO. SLOTS	72	NL AMPS AT RATED VOLTAGE		44.8
5 YEAR WARRANTY		WINDING RES @25 C	.03840	OHMS
MFG. DATE		SER.NO		

ECP84410TR-4 - 125HP, 1785, 3PH, 60HZ, 444T, TEFC, F1						
CUSTOMER INFORMATION PACKET						
S/O	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	444	125	P	3/60	1785	460
AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE
144	CONT	40/F	1.15	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
498834	418143052KE	---	---	.0383		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	44.8	1800	4.44	0	
1/4	31.3	61.7	1796	51.1	92.8	
2/4	62.5	84.1	1792	73.0	95.3	
3/4	93.7	112	1788	81.7	95.7	
4/4	125	144	1784	85.3	95.5	
5/4	156	178	1780	86.6	95.1	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	133	489	892	
PULL UP		270	114	420	875	
BREAKDOWN		1729	290	1067	500	
FULL LOAD		1784	100	368	144	
AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.						
TYPICAL DATA NEMA NOMINAL EFFICIENCY = 95.4PCT.						
ABB		DRAWN BY: <u>CD</u> CHECKED BY: <u>CD</u> APPROVED BY: <u>R. MCELVEEN</u> DATE: <u>1/18/11</u>		AC MOTOR PERFORMANCE DATA		A44WG3870-R001 DATE ISSUED 05/04/21

FRAME 444

RPM 1785

S.F. 1.15

ROTOR 418T43052KE

HP 125

VOLTS 460

NEMA DESIGN B

TEST S.O. TYPICAL DATA

TYPE P

AMPS 144

CODE LETTER G

TEST DATE ---

PHASE / HERTZ 3/60

DUTY CONT


ENCLOSURE TEFC

STATOR RES. @ 25°C .0383

AMB °C / INSUL 40/F

E/S 498834

OHMS (BETWEEN LINES)

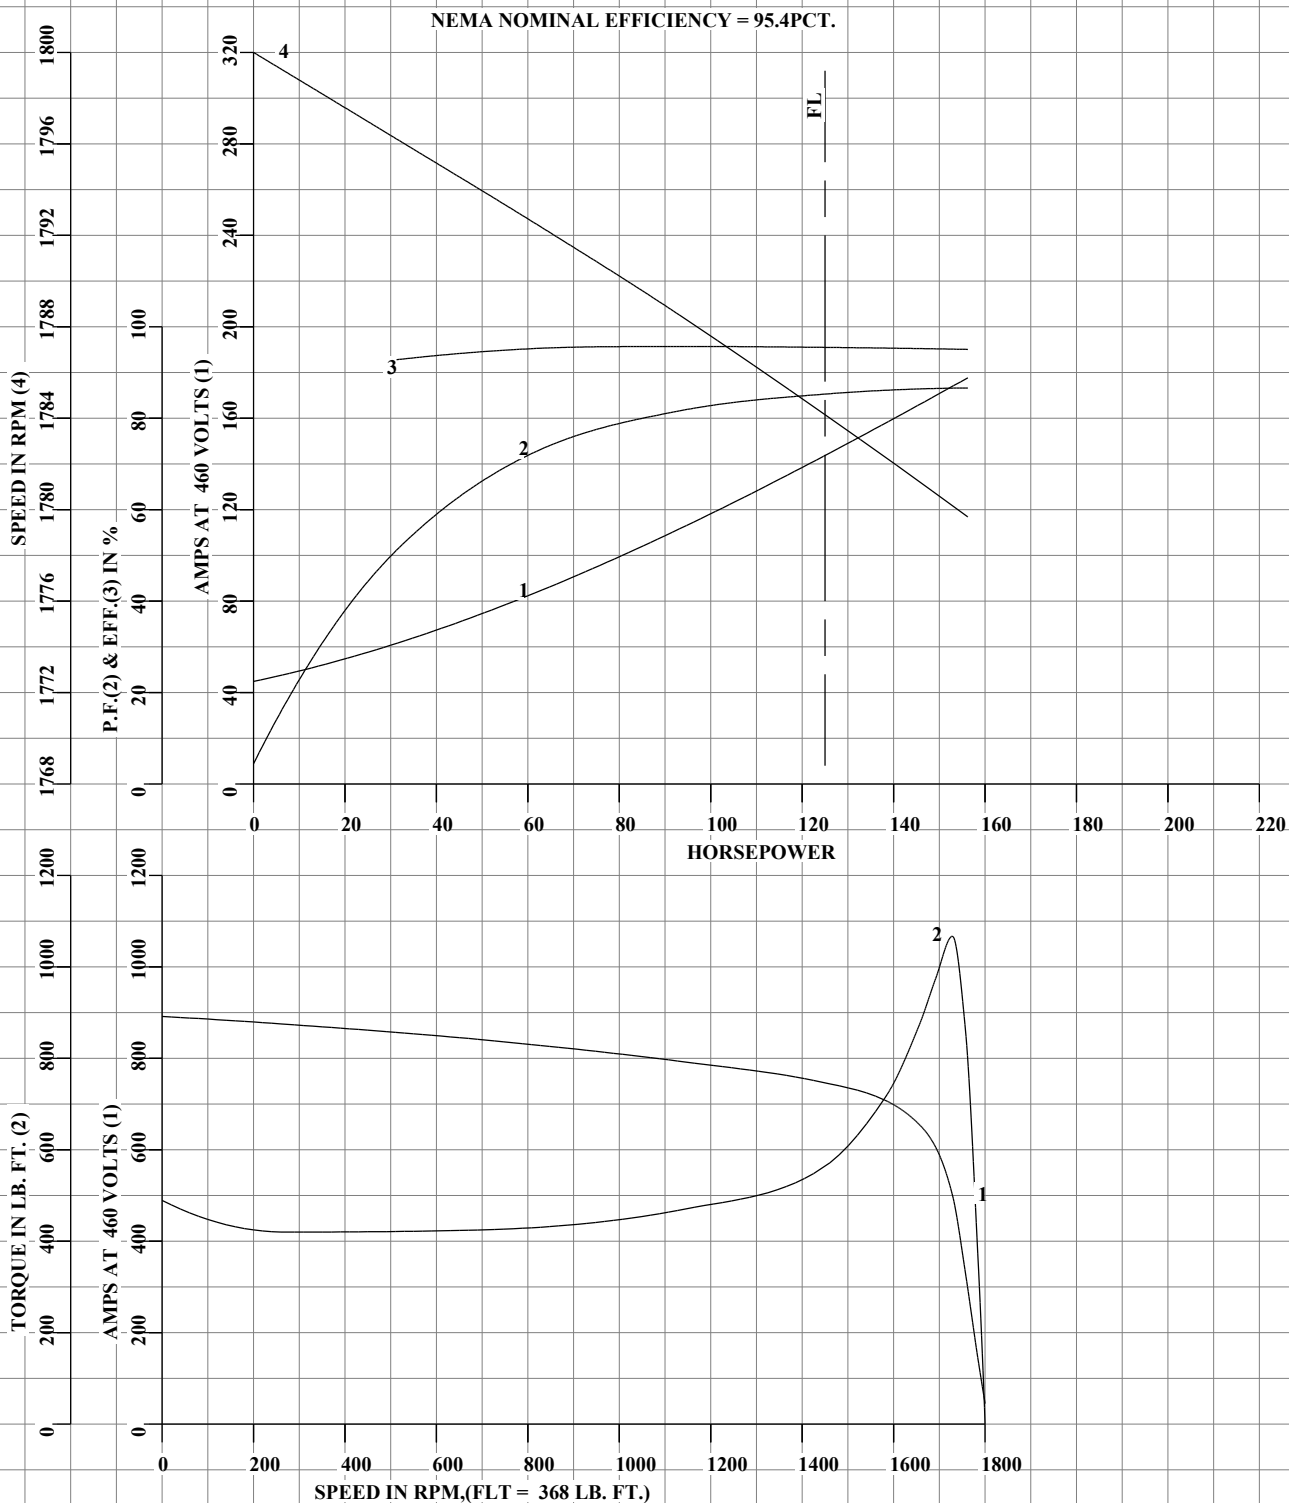

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.



DRAWN BY: CD
CHECKED BY: CD
APPROVED BY: R. MCELVEEN
DATE: 1/18/11

AC MOTOR
PERFORMANCE
DATA

A44WG3870-R001

ISSUE DATE 05/04/21

FRAME 444

RPM 1785

S.F. 1.15

ROTOR 418143052KE

HP 125

VOLTS 460

NEMA DESIGN B

TEST S.O. TYPICAL DATA

TYPE P

AMPS 144

CODE LETTER G

TEST DATE ---

PHASE / HERTZ 3/60

DUTY CONT


ENCLOSURE TEFC

STATOR RES. @ 25°C .0383

AMB °C / INSUL 40/F

E/S 498834

OHMS (BETWEEN LINES)

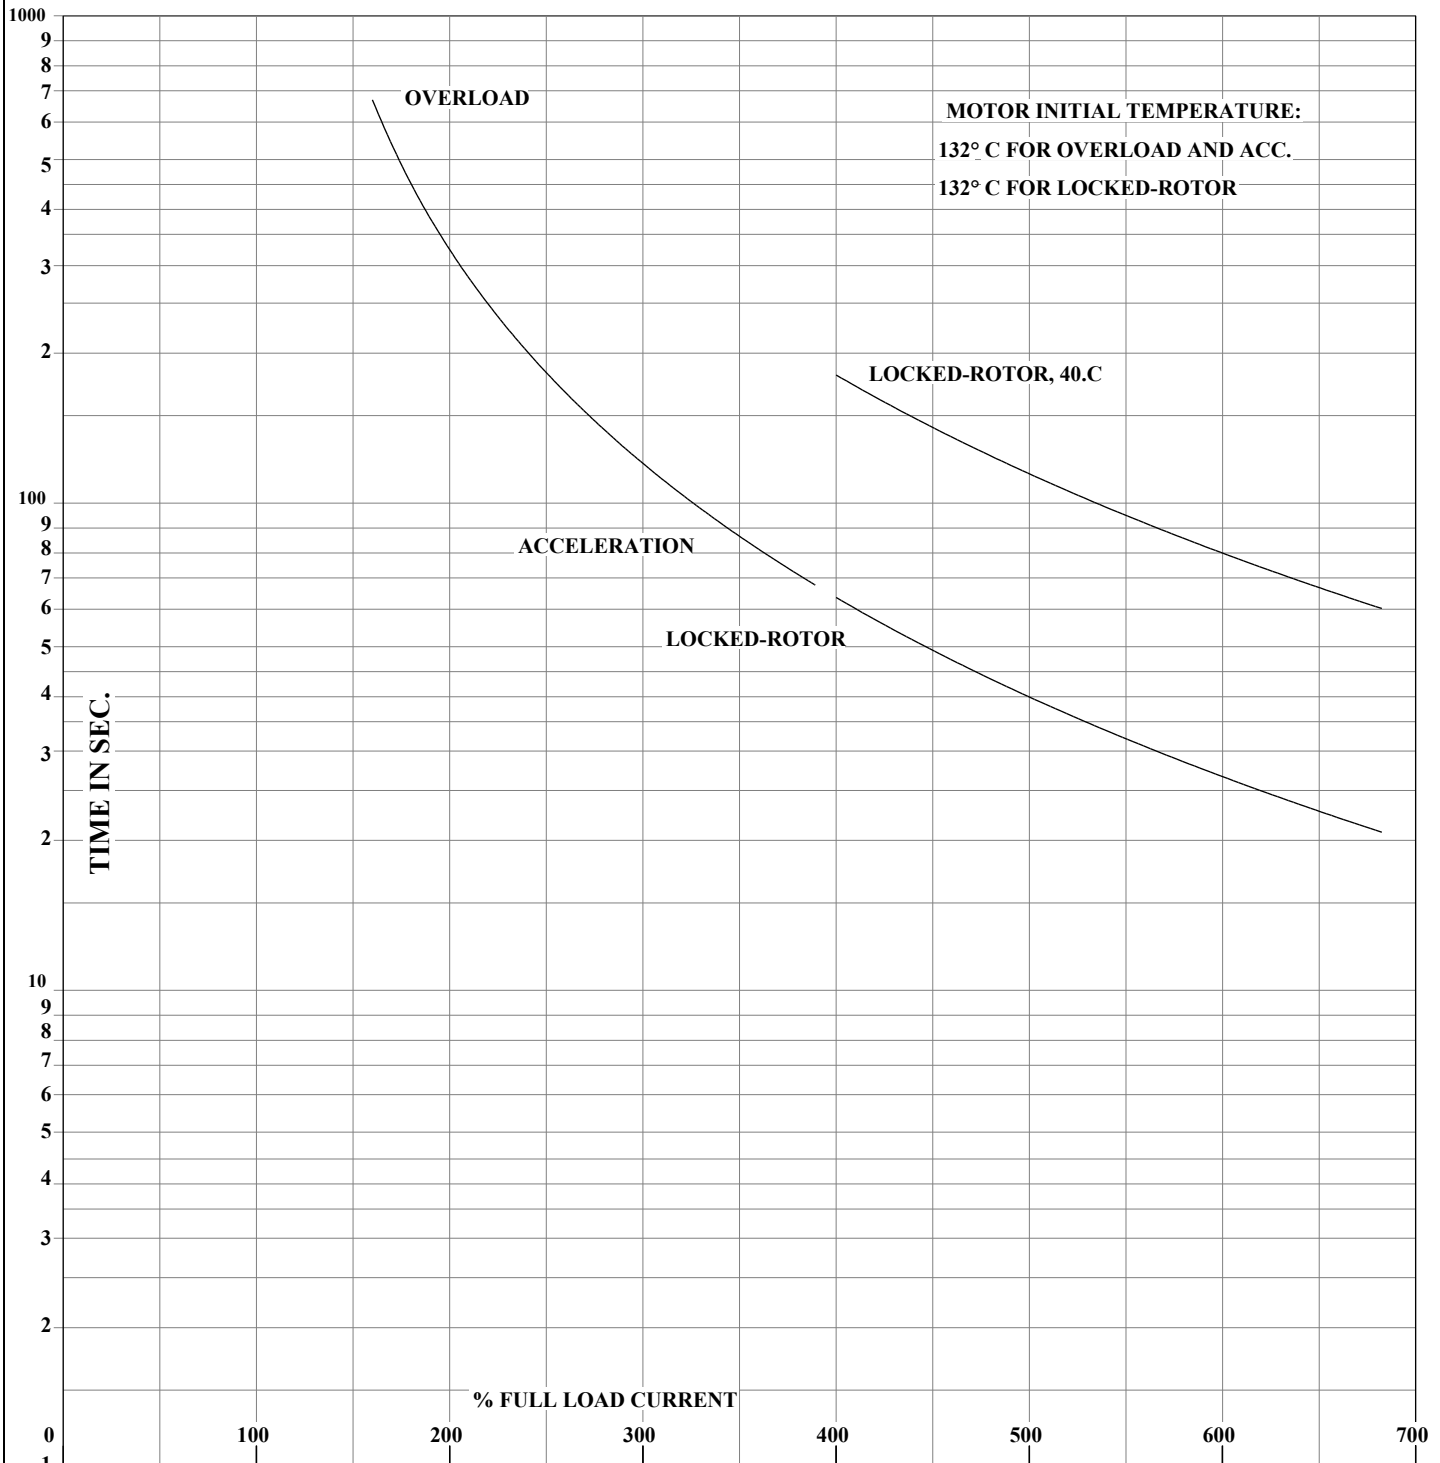

THERMAL LIMIT CURVE
NEMA NOMINAL EFFICIENCY = 95.4PCT.

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.





DRAWN BY: CD
CHECKED BY: CD
APPROVED BY: R. MCELVEEN
DATE: 1/18/11

AC MOTOR
PERFORMANCE
DATA

A44WG3870-R001


ISSUE DATE 05/04/21

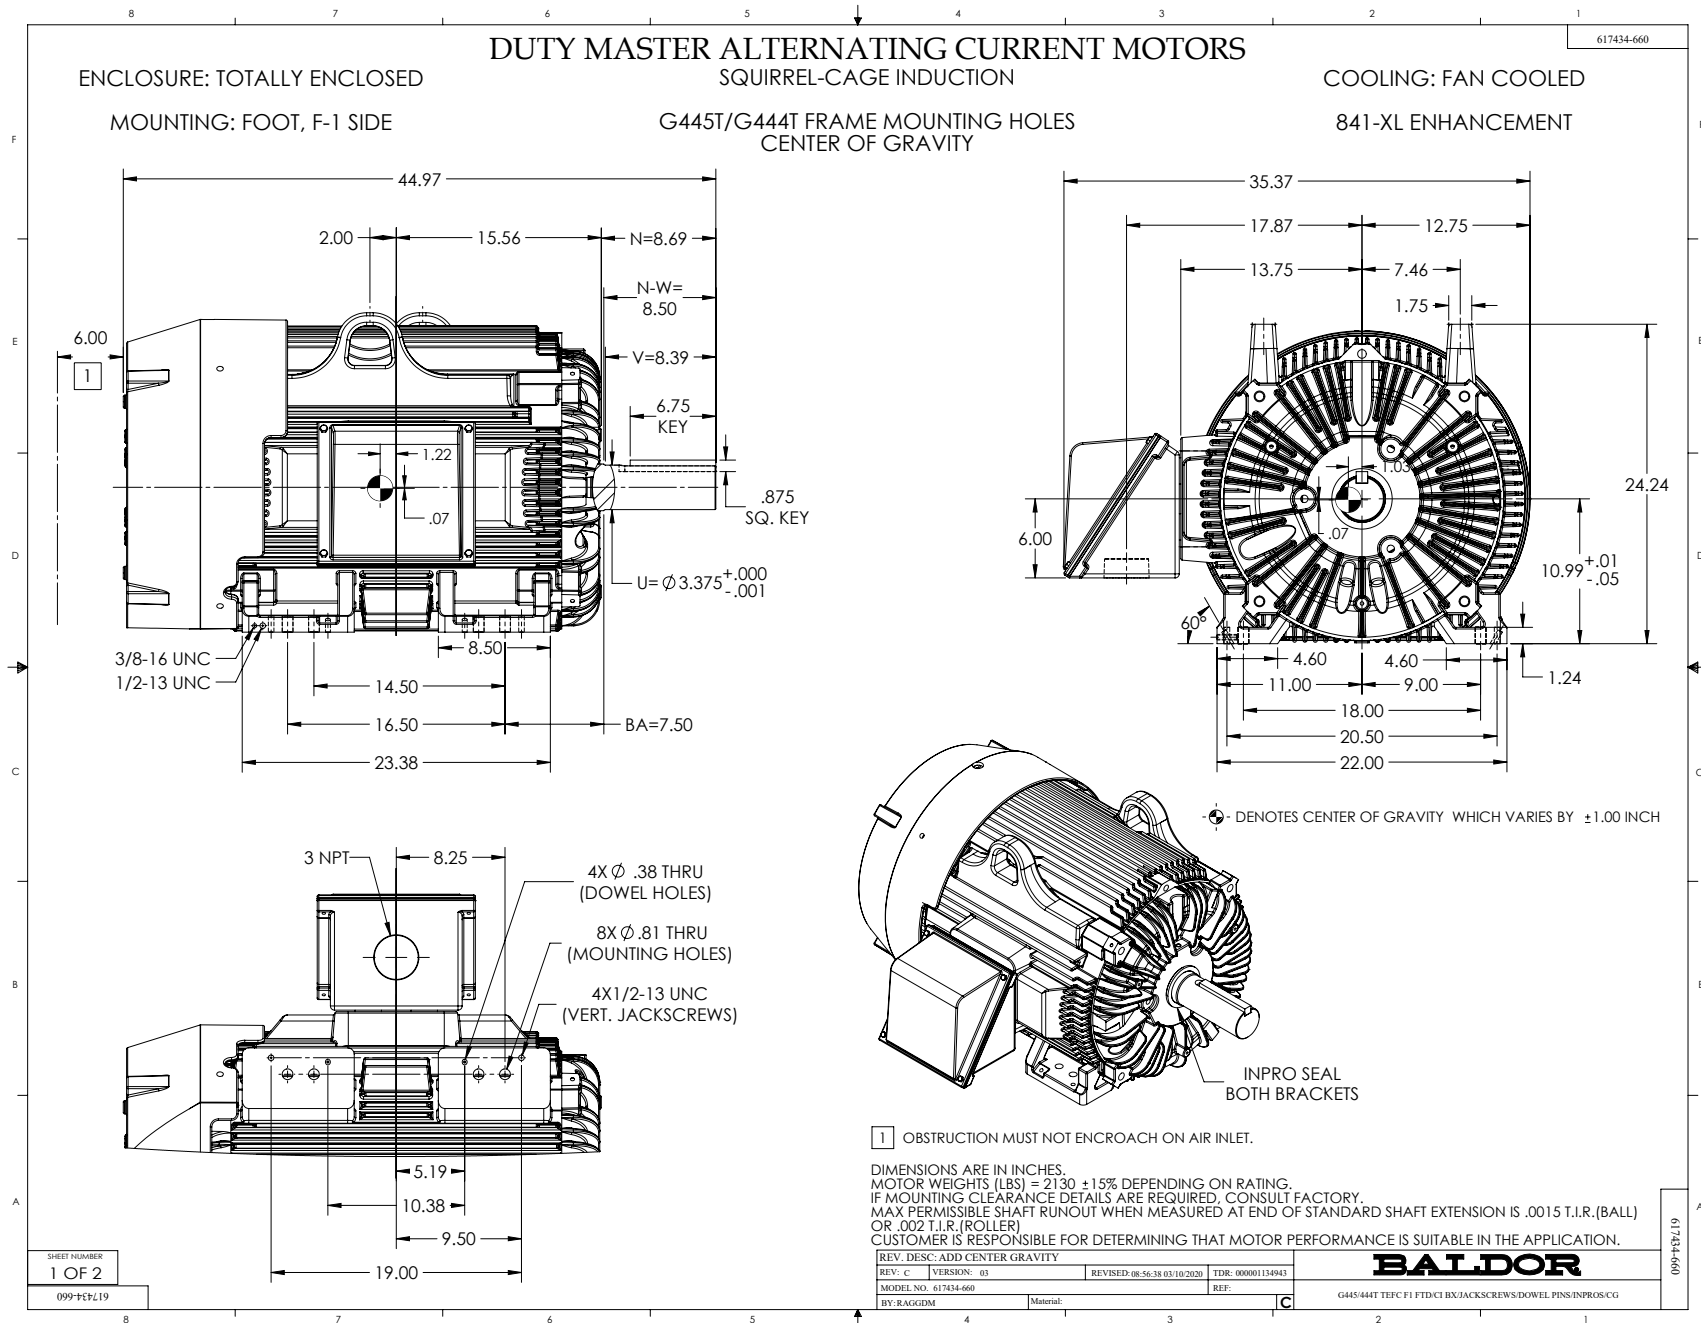

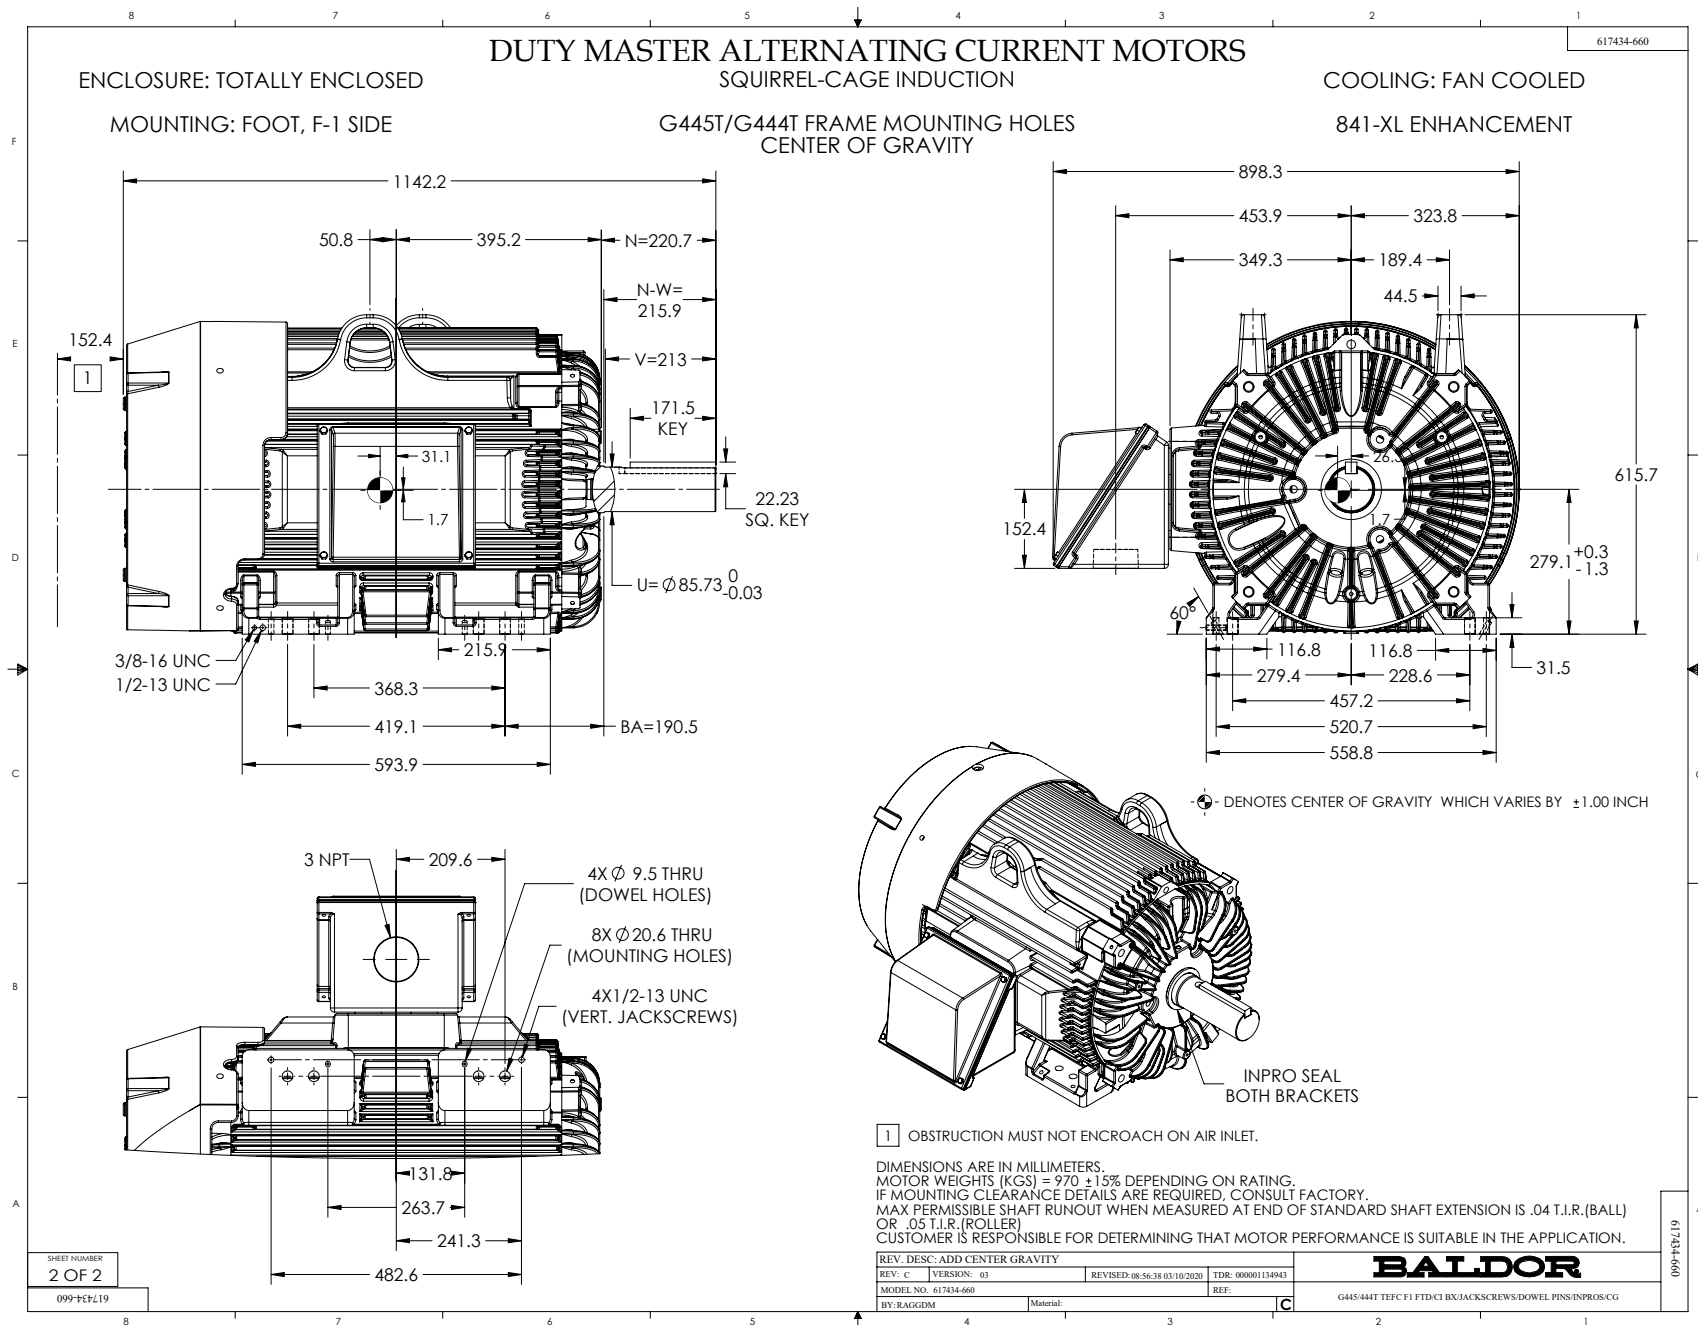

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

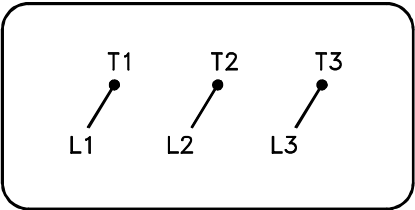

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1