

ABB BALDOR RELIANCE III

Customer information packet

ECTM3665T-5G

5HP, 1750RPM, 3PH, 60HZ, 184T, 0642M, TEFC, F1

Class - None

Division - Not Applicable

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.

10/6/2026 3:45:23 PM

J

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	5.300 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	Heater Included, 115 V
High Voltage Full Load Amps	5.3 a
Insulation Class	F

Part Detail

Revision	C
Type	AC
Mech. spec.	06J518
Base	
Status	PRD/A
Elec. spec.	06WGX200
Layout	06LYJ518
Eff. date	06-08-2023
CD Diagram	CD0006
Poles	04
Leads	3#16
Proprietary	False
Created date	04-20-2022

Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0642M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	15.93 IN
Power Factor	79
Product Family	Chemical Processing (Not DC)
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	Standard
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1260									
CAT.NO.	ECTM3665T-5G								
SPEC.	06J518X200G1								
HP	5								
VOLTS	575								
AMP	5.3								
RPM	1750								
FRAME	184T	HZ	60	PH	3				
SER.F.	1.15	CODE	J	DES	B	CL	F		
NEMA-NOM-EFF	89.5	PF	79						
RATING	40C AMB-CONT								
CC									
DE	6206	ODE	6205						
ENCL	TEFC	SN							
	INV DUTY 20:1 VT								

AC Induction Motor Performance Data

Record # 81830

Typical performance - not guaranteed values

Winding: 06WGX200-R001			Type: 0642M		Enclosure: TEFC	
Nameplate Data			575 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		5	Full Load Torque		15.03 LB-FT	
Volts		575	Start Configuration		direct on line	
Full Load Amps		5.3	Breakdown Torque		52.33 LB-FT	
R.P.M.		1750	Pull-up Torque		21.64 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		30.73 LB-FT
NEMA Design Code		B	KVA Code	J	Starting Current	
Service Factor (S.F.)		1.15	No-load Current		2.34 A	
NEMA Nom. Eff.		89.5	Power Factor	79	Line-line Res. @ 25°C	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		54°C
S.F. Amps				Temp. Rise @ S.F. Load		67°C
				Locked-rotor Power Factor		40.6
				Rotor inertia		0.391 lb-ft²

Load Characteristics 575 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	42	64	76	81	84	85	83
Efficiency	85.2	89.8	90.3	89.6	88.2	86.6	88.8
Speed	1788	1777	1764	1751	1736	1719	1742
Line amperes	2.61	3.26	4.13	5.14	6.31	7.59	5.84


ABB Motors and Mechanical Inc.

WINDING # 06WGX200

Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 1750 RPM 575 V 0642M

TORQUES (LB-FT) : PO=52.33 PU=21.64 LR=30.73 LRA=36.26

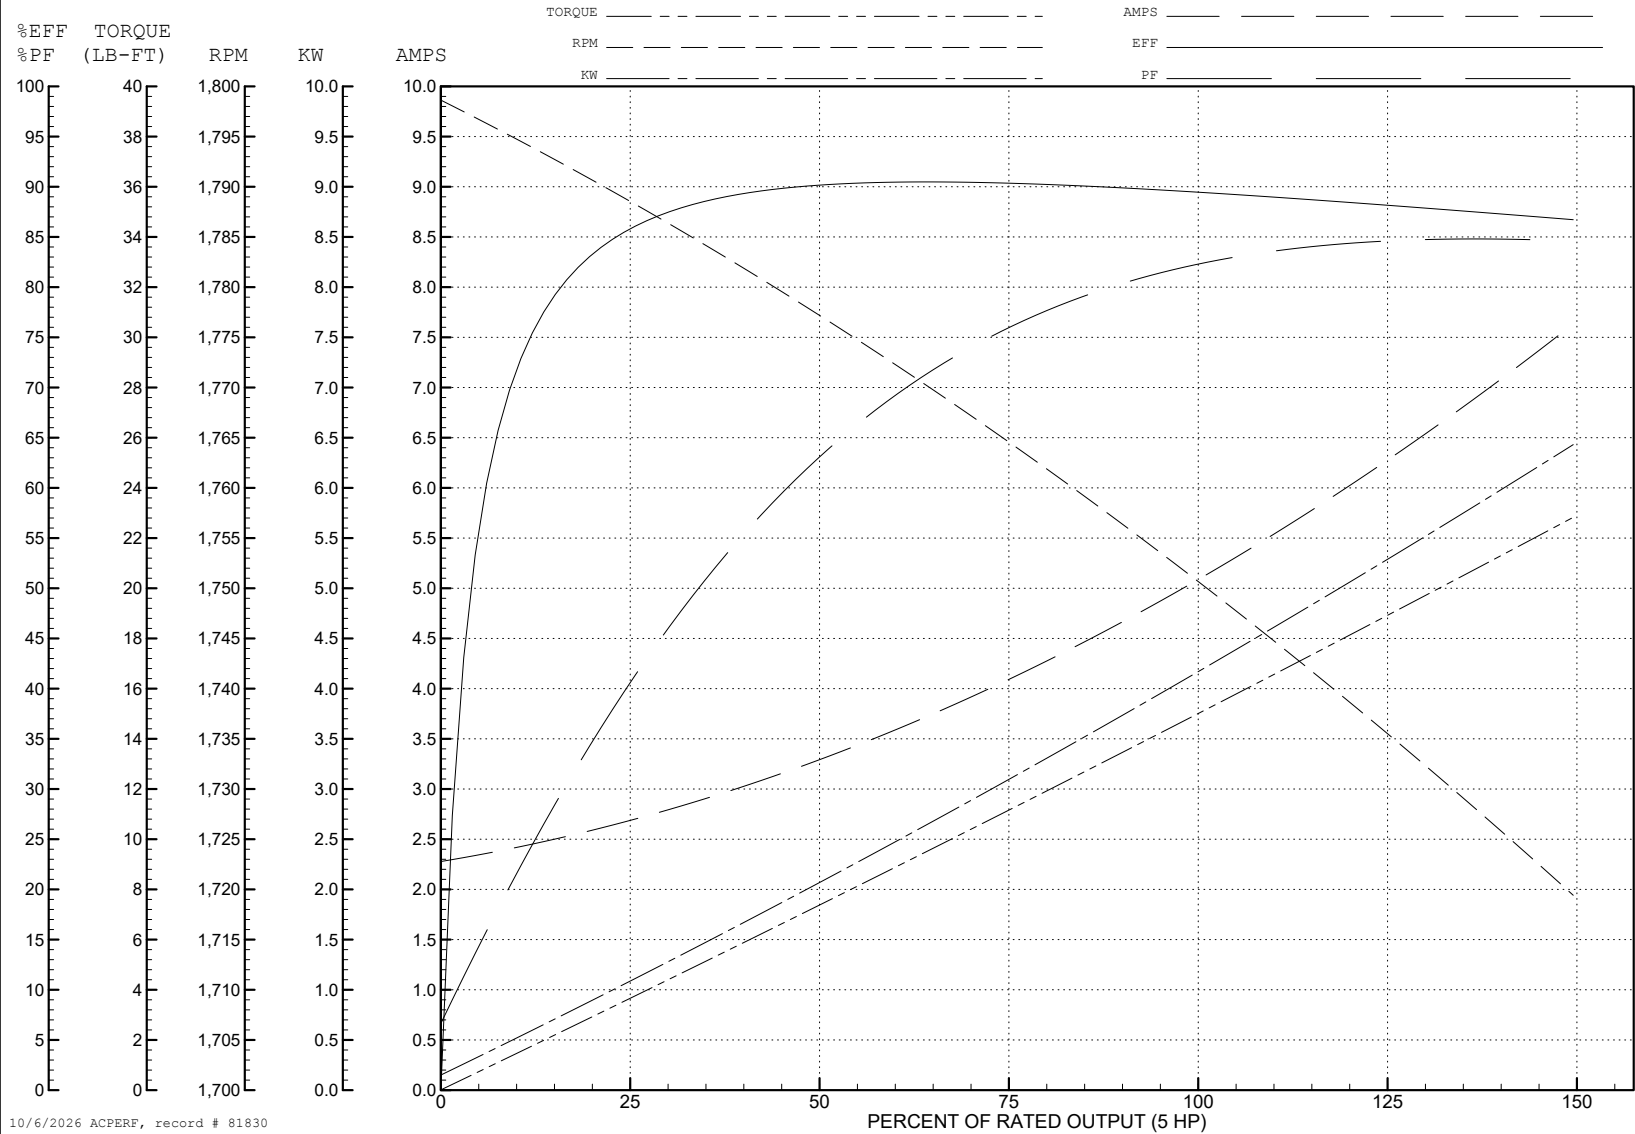

AC Induction Motor Performance Data

Record # 84795

Typical performance - not guaranteed values

Winding: 06WGX200-R001			Type: 0642M		Enclosure: TEFC		
Nameplate Data			575 V, 60 Hz: Single Voltage Motor				
Rated Output (KW)		3.7	Full Load Torque		14.85 N-M		
Volts		575	Start Configuration		direct on line		
Full Load Amps		5.3	Breakdown Torque		52.3 N-M		
R.P.M.		1750	Pull-up Torque		21.6 N-M		
Hz	60	Phase	3	Locked-rotor Torque		30.7 N-M	
NEMA Design Code		B	KVA Code	J	Starting Current		36.3 A
Service Factor (S.F.)		1.15	No-load Current		2.34 A		
NEMA Nom. Eff.		89.5	Power Factor	79	Line-line Res. @ 25°C		4.27 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		53°C	
S.F. Amps				Temp. Rise @ S.F. Load		66°C	
				Locked-rotor Power Factor		40.6	
				Rotor inertia		0.391 kg-m²	

Load Characteristics 575 V, 60 Hz, 3.7 KW

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	42	64	75	81	84	85	83
Efficiency	62.6	66.2	66.4	66	65.1	63.8	65.5
Speed	1788	1777	1764	1751	1736	1720	1742
Line amperes	2.6	3.25	4.11	5.1	6.27	7.52	5.8


ABB Motors and Mechanical Inc.


WINDING # 06WGX200

Typical performance - not guaranteed values.




3.7 KW 3 PH 60 HZ 1750 RPM 575 V 0642M

TORQUES (N-M) : PO=52.3 PU=21.6 LR=30.7 LRA=36.3

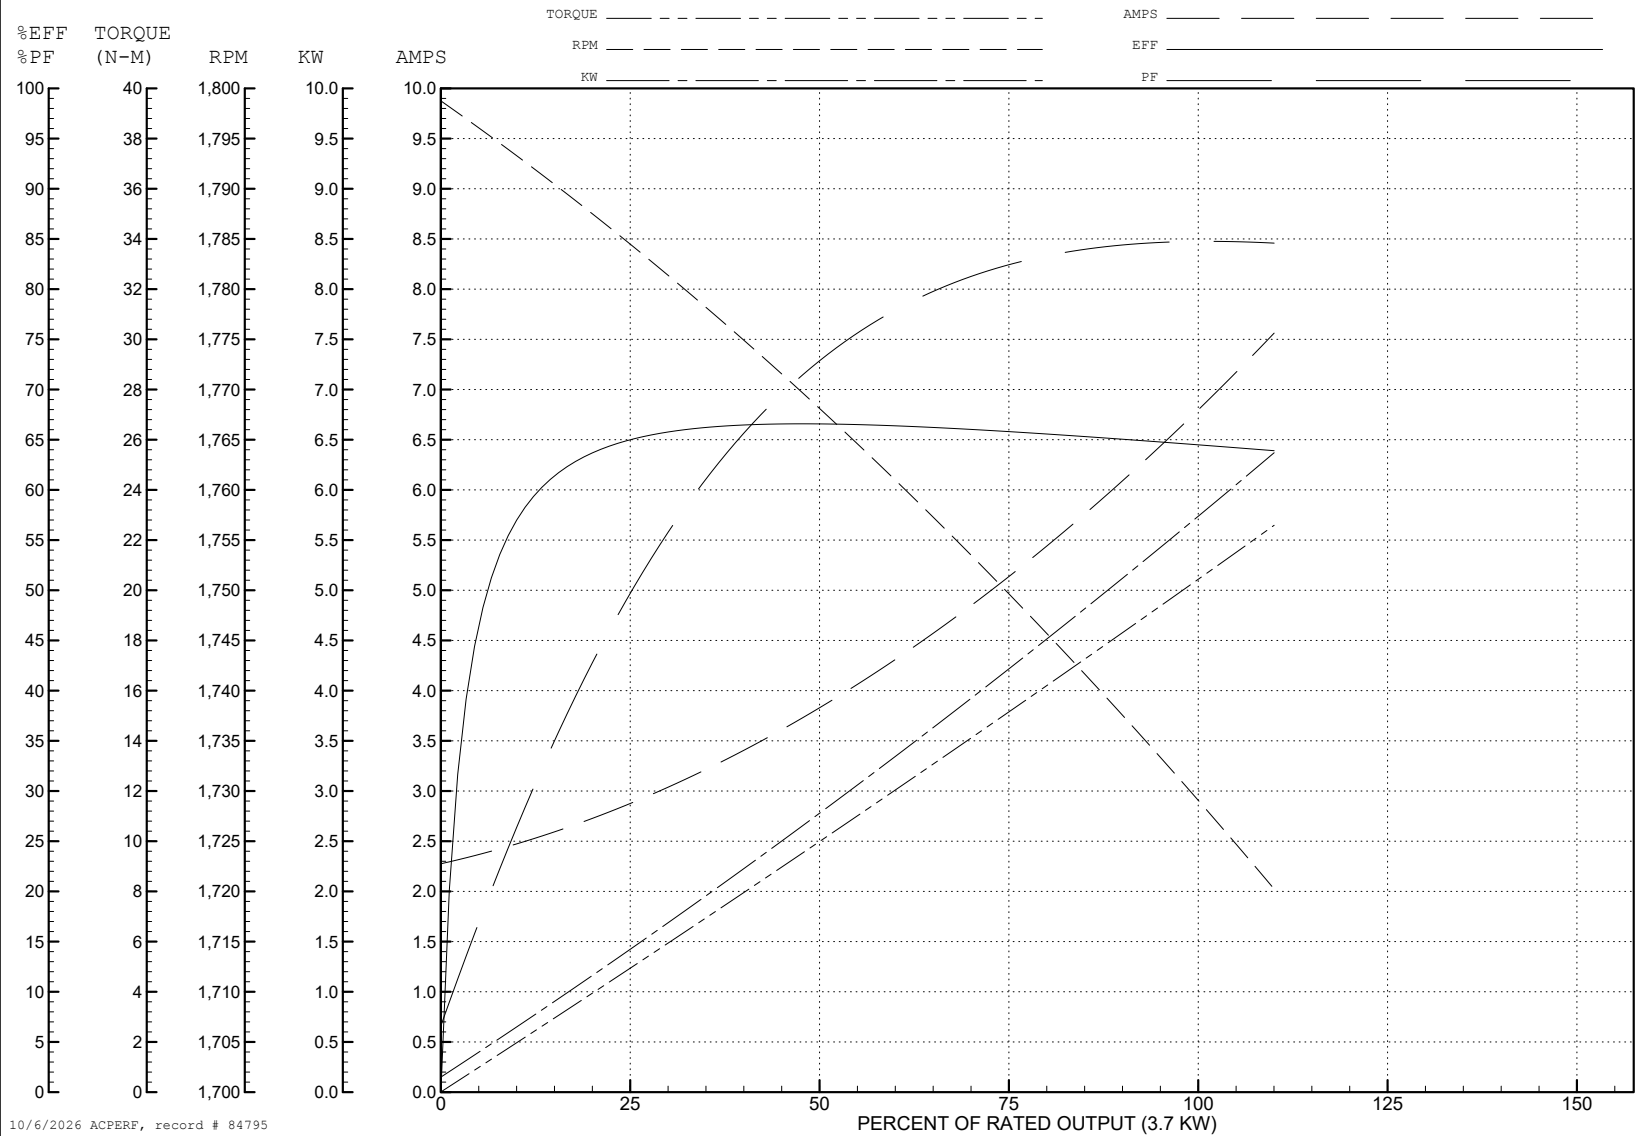

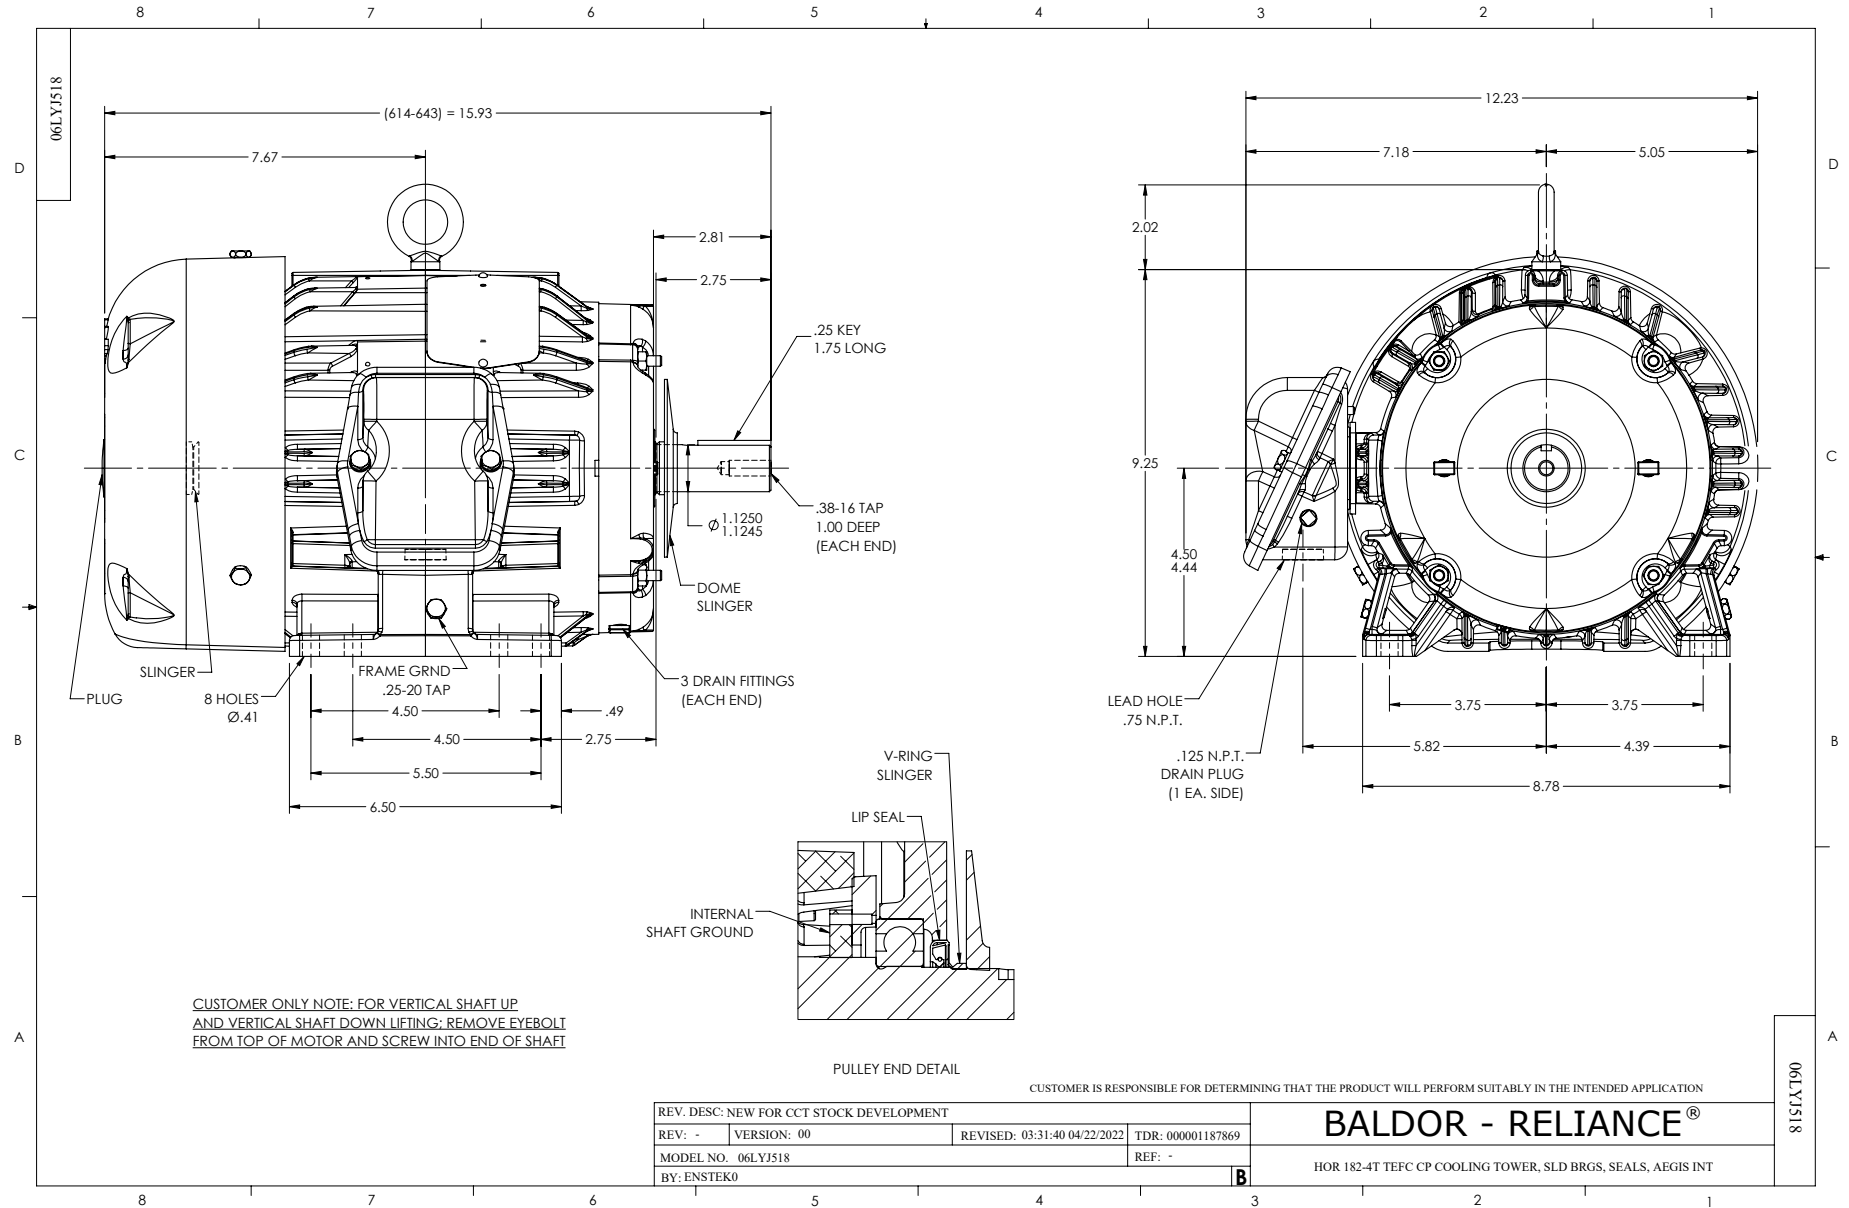

CD0006

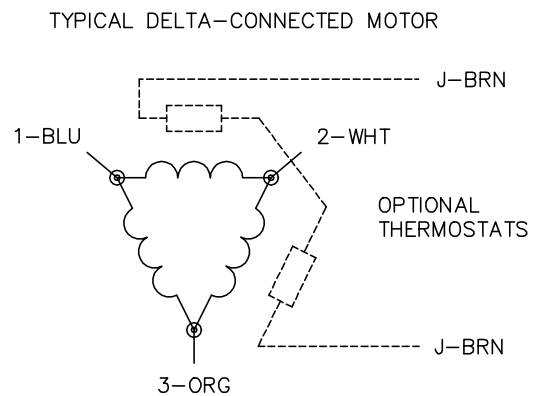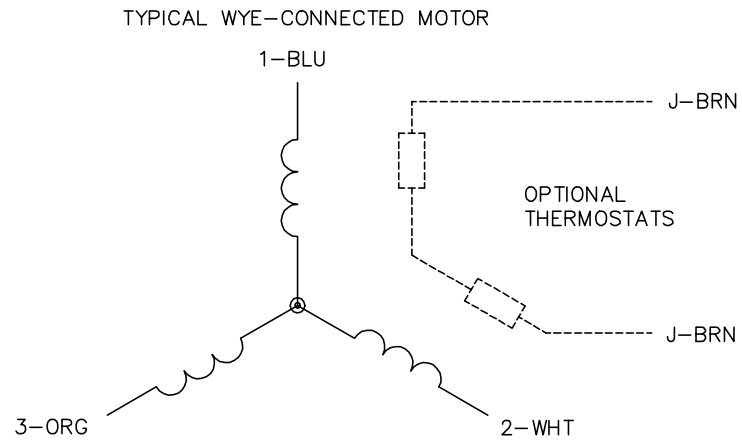

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: —



BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1