

ABB BALDOR RELIANCE III

Customer information packet

EFM4312T

50HP, 1185RPM, 3PH, 60HZ, 365T, A3668M, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	365T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	50.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA PREMIUM
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	124.000 A @ 230.0 V 132.000 A @ 208.0 V 62.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	62.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs

Part Detail

Revision	J
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG4262
Layout	617428-078
Eff. date	07-08-2024
CD Diagram	416820-002
Poles	06
Leads	3#4,6#6
Proprietary	False
Created date	09-30-2022

Max Speed	1800 rpm
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A3668M
Mounting Arrangement	F2
Number of Poles	6
Overall Length	33.49 IN
Power Factor	81
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1185 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate
NP3979LUA

CAT #		EFM4312T				SER				CC		010A				
SPEC		A36-8069-4262				RATING		40C AMB-CONT								
HZ		VOLTS		AMPS		RPM		HP	CODE		SF	DES	PF	NEMA NOM. EFF		
60		230		124/62		1185		50	G		1.15	B	81	%	94.1	%
		-												%		%
PH	3	CL	F	MAX CORR KVAR		15.8										
BRG		DE	6313	ODE	6313	ENCL	TEFC	FR	365T				54			
GREASE		POLYREX EM								MTR WT		908	LBS			
USABLE AT		50HZ 40HP 190/380V 120/60A								SF1.0						
INVERTER DUTY		CT	15-60	HZ	4:1	VT	3-60	HZ	20:1	CHP	60-90	HZ	1.5:1	1.0 SF VPWM		
MAX RPM		1800	SFA 142/71													

ABB BALDOR RELIANCE III S/O	CUSTOMER INFORMATION PACKET					
	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	365HP	50	P	3/60	1185	230/460
AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE
124/61.9	CONT	40/F	1.15	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
-	418141089AE	---	---	.0290/.116		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	23.9	1200	5.00	0	
1/4	12.5	28.4	1197	45.8	90.1	
2/4	25.0	37.2	1194	67.2	93.6	
3/4	37.5	48.7	1191	76.4	94.3	
4/4	50.0	61.9	1188	80.3	94.2	
5/4	62.5	76.1	1185	82.0	93.7	
SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	165	365	375		
PULL UP	540	147	325	335		
BREAKDOWN	1135	253	559	200		
FULL LOAD	1188	100	221	61.9		
AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.						
TYPICAL DATA NEMA NOM. EFF. 94.1 PCT						
	DRAWN BY: <u>C.B.ATANGANE</u> CHECKED BY: <u>J. P. TSAO</u> APPROVED BY: <u>W. L. SMITH</u> DATE: <u>11/12/25</u>			AC MOTOR PERFORMANCE DATA		A36WG4262-R001
						DATE ISSUED 11/12/25

FRAME 365HP

HP	50
----	----

TYPE	P
1	0.0000
2	0.0000
3	0.0000
4	0.0000
5	0.0000
6	0.0000
7	0.0000
8	0.0000
9	0.0000
10	0.0000
11	0.0000
12	0.0000
13	0.0000
14	0.0000
15	0.0000
16	0.0000
17	0.0000
18	0.0000
19	0.0000
20	0.0000
21	0.0000
22	0.0000
23	0.0000
24	0.0000
25	0.0000
26	0.0000
27	0.0000
28	0.0000
29	0.0000
30	0.0000
31	0.0000
32	0.0000
33	0.0000
34	0.0000
35	0.0000
36	0.0000
37	0.0000
38	0.0000
39	0.0000
40	0.0000
41	0.0000
42	0.0000
43	0.0000
44	0.0000
45	0.0000
46	0.0000
47	0.0000
48	0.0000
49	0.0000
50	0.0000
51	0.0000
52	0.0000
53	0.0000
54	0.0000
55	0.0000
56	0.0000
57	0.0000
58	0.0000
59	0.0000
60	0.0000
61	0.0000
62	0.0000
63	0.0000
64	0.0000
65	0.0000
66	0.0000
67	0.0000
68	0.0000
69	0.0000
70	0.0000
71	0.0000
72	0.0000
73	0.0000
74	0.0000
75	0.0000
76	0.0000
77	0.0000
78	0.0000
79	0.0000
80	0.0000
81	0.0000
82	0.0000
83	0.0000
84	0.0000
85	0.0000
86	0.0000
87	0.0000
88	0.0000
89	0.0000
90	0.0000
91	0.0000
92	0.0000
93	0.0000
94	0.0000
95	0.0000
96	0.0000
97	0.0000
98	0.0000
99	0.0000
100	0.0000

PHASE / HERTZ 3/60

CUSTOMER INFORMATION PACKET

R INFORMATIC
REV 1182**VOLTS 230/460**

AMPS 124/61.9

DUTY CONT

AMB °C / INSUL 40/F

EFM4312T - 50HP, 1185RPM, 3PH, 60HZ, 265T, A3668M, TEFC, F

S.F. 1.15

NEMA DESIGN B

CODE LETTER G

ENCLOSURE TEFC

E/S -


Z, 265T, A3668M, TEEG, F
ROTOR 418141089, AF

TEST S.O. TYPICAL DATA

TEST DATE ---

STATOR RES. @ 25°C .0290/.116

OHMS (BETWEEN LINES)

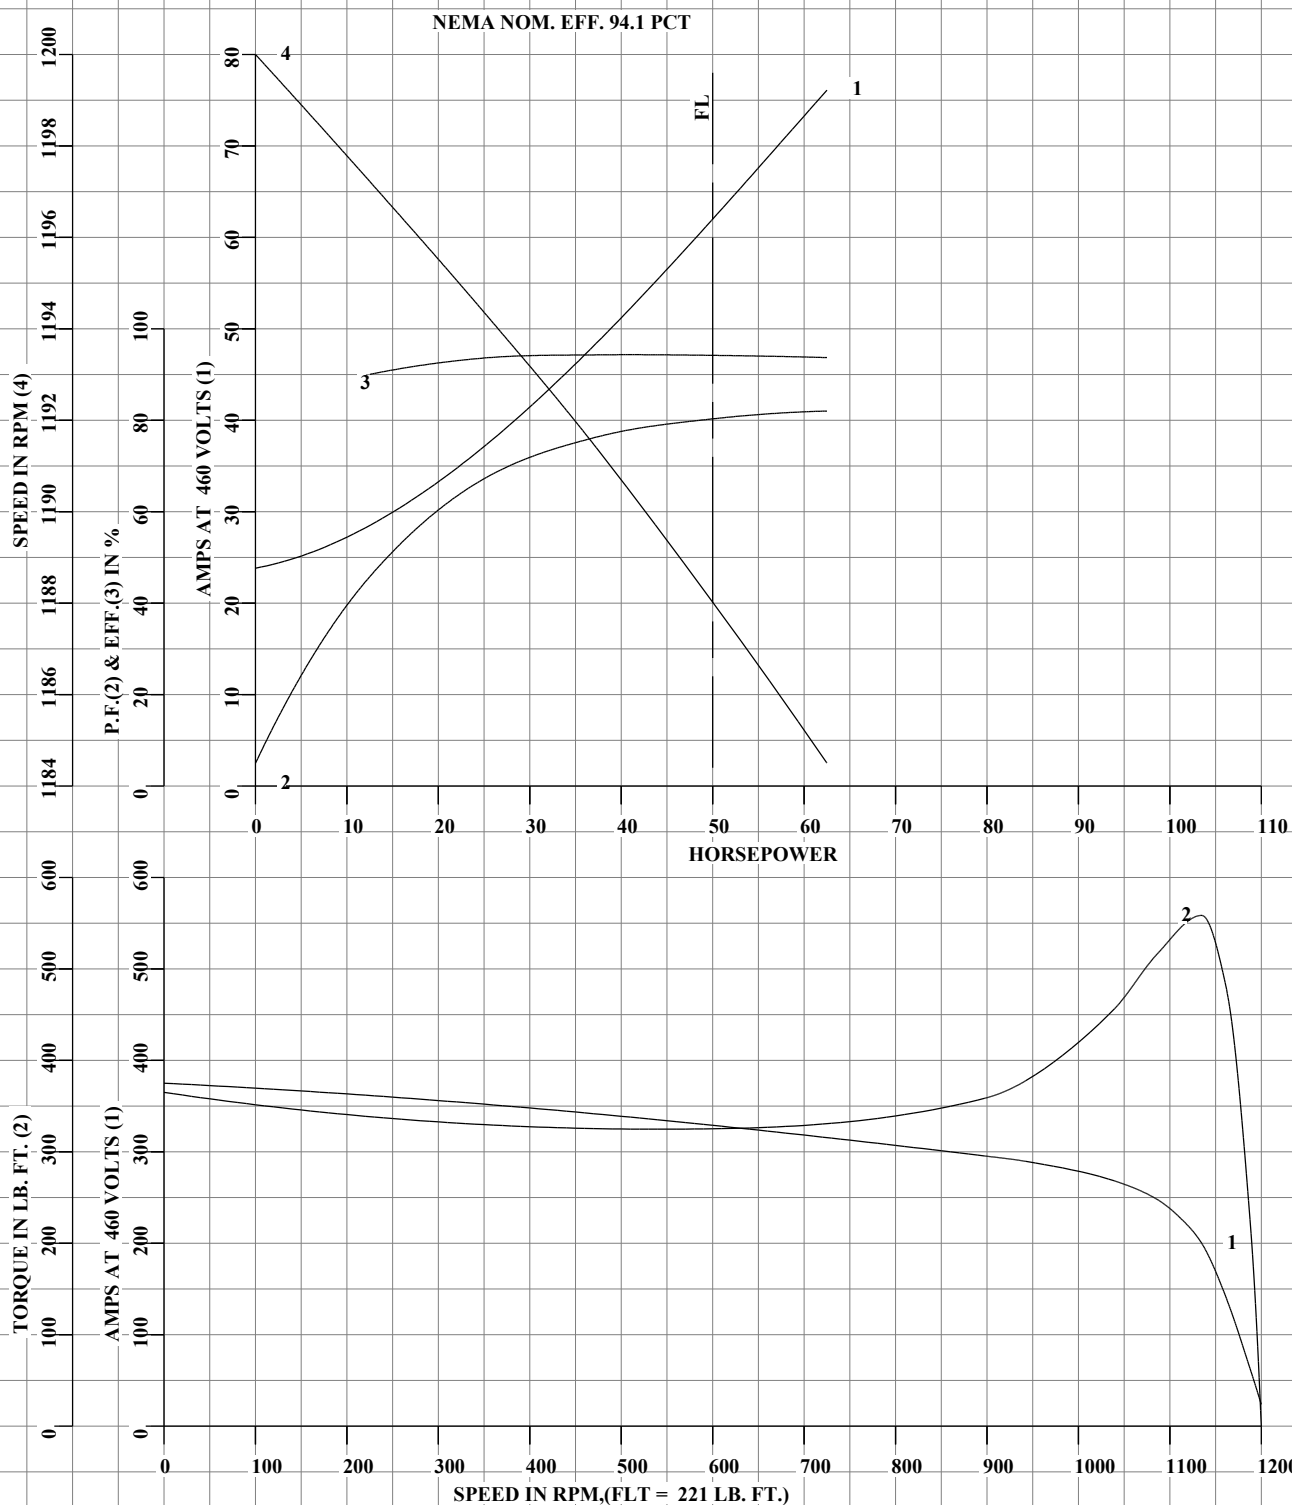

AMPERES SHOWN FOR 230/460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.




DRAWN BY: C.B.ATANGANE
CHECKED BY: J. P. TSAO
APPROVED BY: W. L. SMITH
DATE: 11/12/25

AC MOTOR PERFORMANCE DATA



A36WG4262-R001

ISSUE DATE 11/12/25

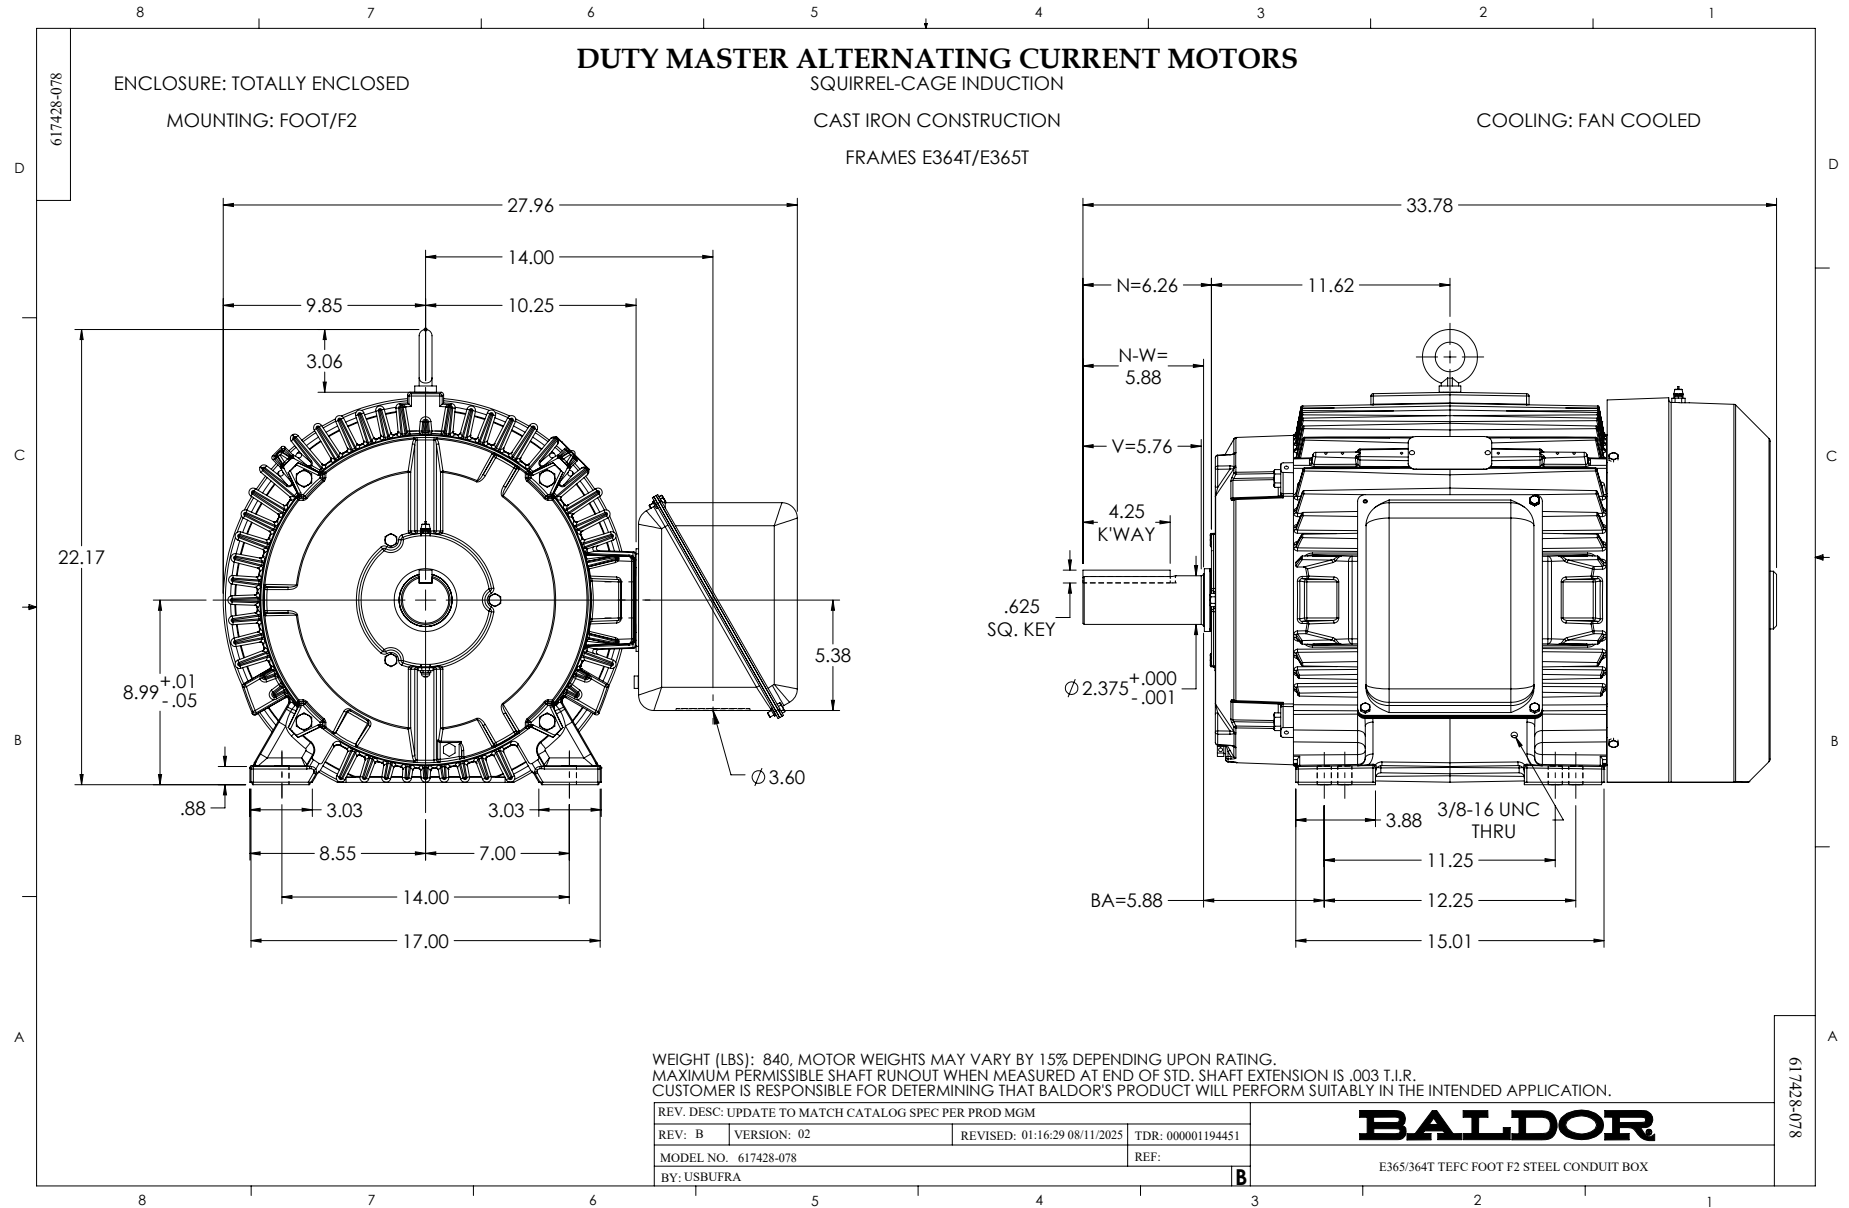

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

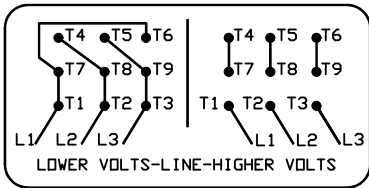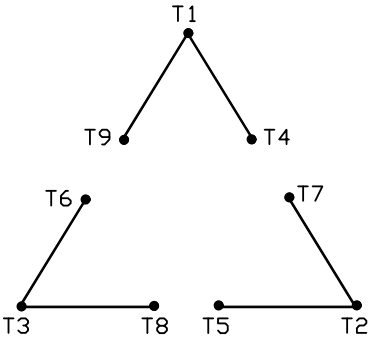

(N. P. 1575-B)

416820-002

REV. DESC: ADJUST TEXT DARKNESS		
REV. LTR: B	VERSION: 02	TDR: 000001285318
FILE: \RAG\00022\453	REVISED: 09:36:26 09/24/2026	BY: USJOSUL
MTL: -		



CONN DIAG - STANDARD 9 LEAD, DELTA-CONNECTED
SH1 of 1