

ABB BALDOR RELIANCE III

Customer information packet

EL3510

1HP, 1740RPM, 1PH, 60HZ, 56H, 3526LC, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56H
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	1.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.800 A @ 230.0 V 9.600 A @ 115.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	78.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.8 a
Insulation Class	F
Inverter Code	Not Inverter

Part Detail

Revision	F
Type	AC
Mech. spec.	35J385
Base	
Status	PRD/A
Elec. spec.	35WGG241
Layout	35LYJ385
Eff. date	06-15-2026
CD Diagram	CD0055
Poles	04
Leads	6#18
Proprietary	False
Created date	08-01-2022

IP Rating	NONE
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3526LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.91 IN
Power Factor	85
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1740 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2116L									
CAT.NO.	EL3510								
SPEC.	35J385G241								
HP	1								
VOLTS	115/230								
AMP	9.6/4.8								
RPM	1740								
FRAME	56H			HZ	60			PH	1
SER.F.	1.15		CODE	K		DES	L	CL	F
NEMA-NOM-EFF	78		PF	85					
RATING	40C AMB-CONT								
CC									
DE	6205		ODE	6203					
ENCL	TEFC		SN						
	SFA 9.4/4.7								

Accessories

Part number	Description	Multiplier
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 91189

Typical performance - not guaranteed values

Winding: 35WGG241-R003			Type: 3526LC		Enclosure: TEFC		
Nameplate Data			115 V, 60 Hz: Low Voltage Connection				
Rated Output (HP)		1	Full Load Torque		3.02 LB-FT		
Volts		115/230	Start Configuration		direct on line		
Full Load Amps		9.6/4.8	Breakdown Torque		7.77 LB-FT		
R.P.M.		1740	Pull-up Torque		6.11 LB-FT		
Hz	60 Phase	1	Locked-rotor Torque		9.4 LB-FT		
NEMA Design Code		L	KVA Code	K	Starting Current		73.8 A
Service Factor (S.F.)		1.15	No-load Current		4.82 A		
NEMA Nom. Eff.		78	Power Factor	85	Line-line Res. @ 25°C		0.699 Ω A Ph 1.52 Ω B Ph
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		54°C
S.F. Amps					Temp. Rise @ S.F. Load		65°C
					Locked-rotor Power Factor		96
					Rotor inertia		0.188 lb-ft²

Load Characteristics 115 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	50	69	79	86	89	90	88
Efficiency	63.5	75.5	78.5	78.4	76.2	72.3	77.1
Speed	1784	1771	1755	1738	1716	1686	1725
Line amperes	5.24	6.28	7.78	9.66	11.96	14.82	11


ABB Motors and Mechanical Inc.


WINDING # 35WGG241

Typical performance - not guaranteed values.

1 HP 1 PH 60 HZ 1740 RPM 115 V 3526LC

TORQUES (LB-FT): PO=7.77 PU=6.11 LR=9.4 LRA=73.8

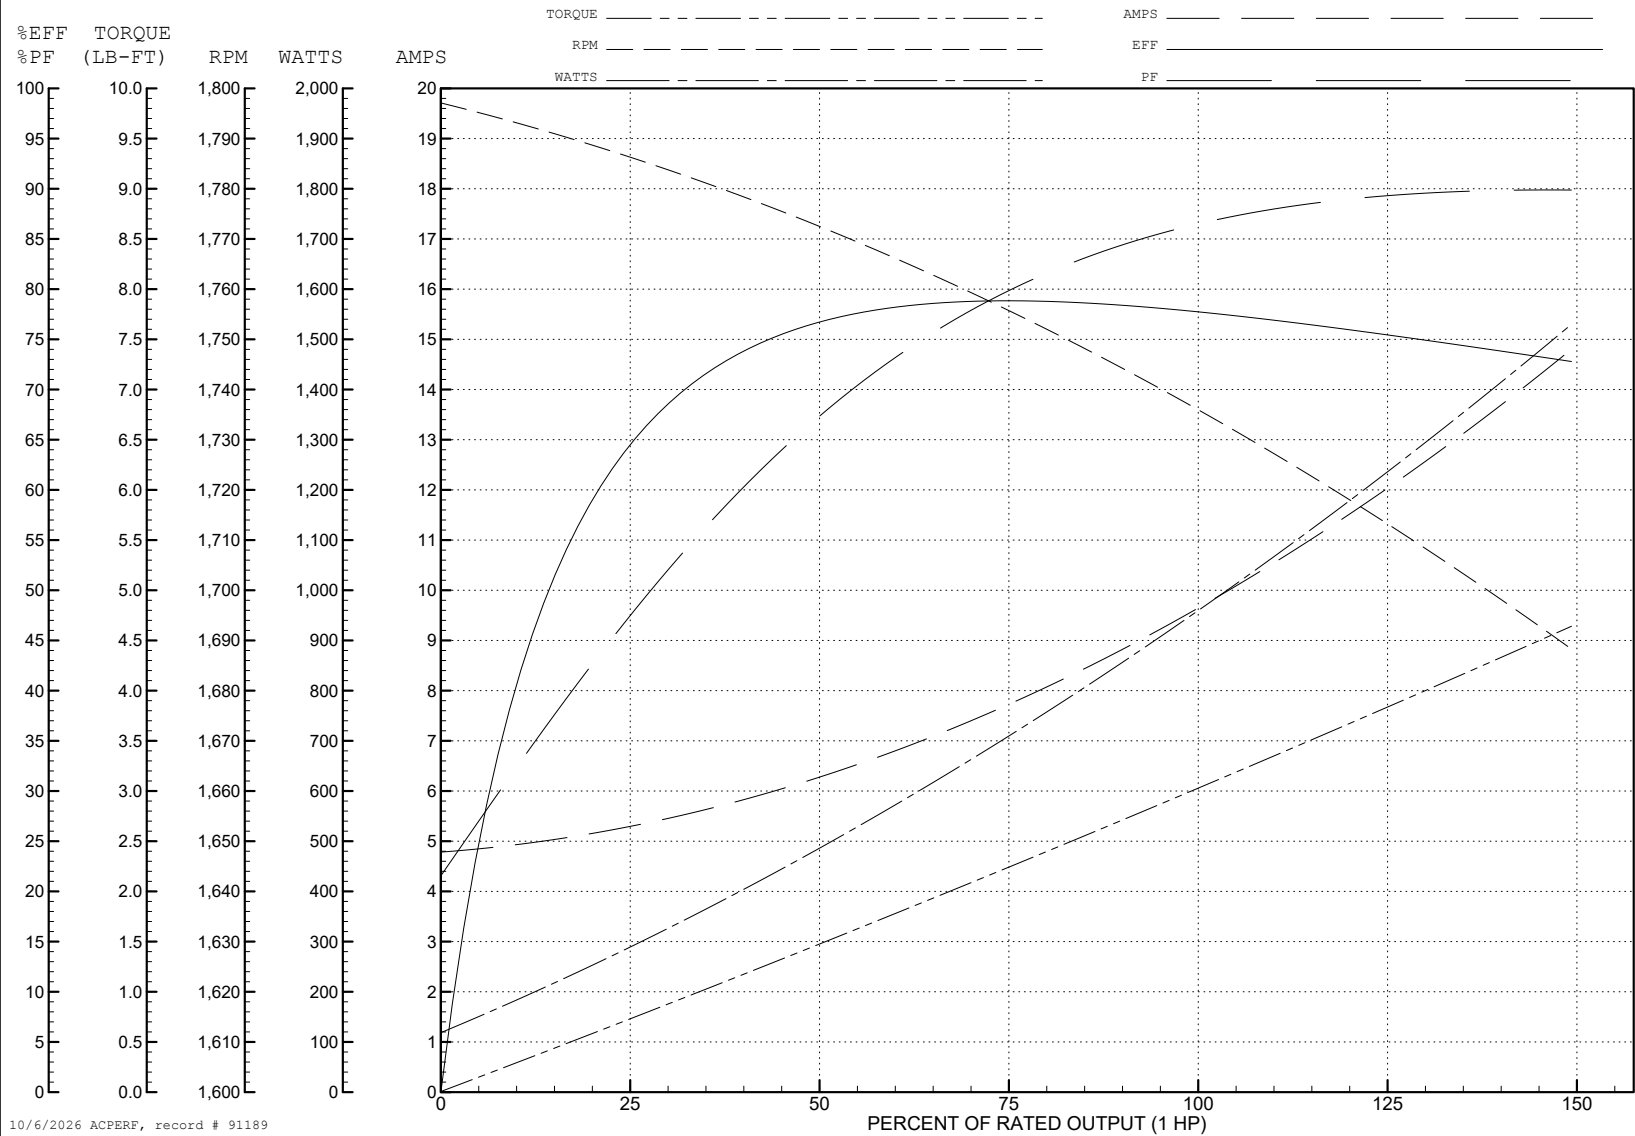



CD0055

