

ABB BALDOR RELIANCE III

Customer information packet

EM4308T

40HP, 1190RPM, 3PH, 60HZ, 364T, A36062M, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	364T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	40.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA PREMIUM NEMA PREMIUM (OLD LOGO) CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	107.000 A @ 208.0 V 49.800 A @ 460.0 V 99.600 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	49.8 a
Insulation Class	F
Inverter Code	Inverter Ready

Part Detail

Revision	AF
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG1194
Layout	617428-011
Eff. date	07-08-2024
CD Diagram	416820-002
Poles	06
Leads	3#4,6#6
Proprietary	False
Created date	10-19-2010

IP Rating	NONE
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Max Speed	1800 rpm
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A36062M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	33.48 IN
Power Factor	80
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1190 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate
NP3979LUA

CAT #		EM4308T				SER				CC		010A					
SPEC		P36G3400				RATING		40C AMB-CONT									
HZ		VOLTS		AMPS		RPM		HP	CODE	-	SF	DES	PF	NEMA NOM. EFF			
60		230/460		99.6/49.8		1190		40	G		1.15	B	80	%	94.1	%	
		-												%		%	
PH	3	CL	F	MAX CORR KVAR		12											
BRG		DE	6313	ODE		6313	ENCL	TEFC	FR	364T		54					
GREASE		POLYREX EM								MTR WT		847	LBS				
USABLE AT		50HZ 30HP 190/380V 98/49A								SF1.0							
INVERTER DUTY		CT	15-60	HZ	4:1	VT	3-60	HZ	20:1	CHP	60-90	HZ	1.5:1	1.0 SF VPWM			
MAX RPM		1800	SFA 113/56.3														

AC Induction motor performance data

Record #93159 - Typical performance - not guaranteed values

Winding	A36WG1194
Type	A3662M
Enclosure	TEFC

Nameplate data

Rated Output	40
Volts	230 / 460
Full Load Amps	99.6 / 49.8
R.P.M.	1190
Hz	60
Phase	3
KVA Code	G
S.F.	1.15
NEMA Nom. Eff.	94.1
Power Factor	80
Duty	CONT
S.F. Amps	

460 V. 60 Hz:

High Voltage Connection

Full Load Torque	176.8 LB-FT
Start Configuration	direct on line
Breakdown Torque	514 LB-FT
Pull-up Torque	266 LB-FT
Locked-rotor Torque	335 LB-FT
Starting Current	312 A
No-load Current	18.7
Line-line Res. @ 25°C	0.14922 Ω
Temp. Rise @ Rated Load	43°C
Temp. Rise @ S.F. Load	51°C
Locked-rotor Power Factor	25.4
Rotor inertia	0

Load Characteristics 460 V, 60 Hz, 40 HP

% of Rated Load	NL	25	50	75	100	125	150	SF
Power Factor	5	46	67	77	80	82	82	81
Efficiency	0	90	93.5	94.2	94.1	93.7	93	93.9
Speed	1199	1195.3	1193	1190.2	1187.5	1184.3	1181.4	1186
Line amperes	18.7	22.4	29.7	38.9	49.3	60.9	73.7	56.3

REVIEW

**ABB BALDOR
RELIANCE III**


CUSTOMER INFORMATION PACKET


EM4308T - 40HP, 1190RPM, 3PH, 60HZ, 364T, A36062M, TEFC

WINDING # A36WG1194

40 HP 3 PH 60 HZ 1190 RPM 460 V A3662M



TORQUES (LB-FT): PO=514.00 PU=266.00 LR=335.00 LRA=312.00

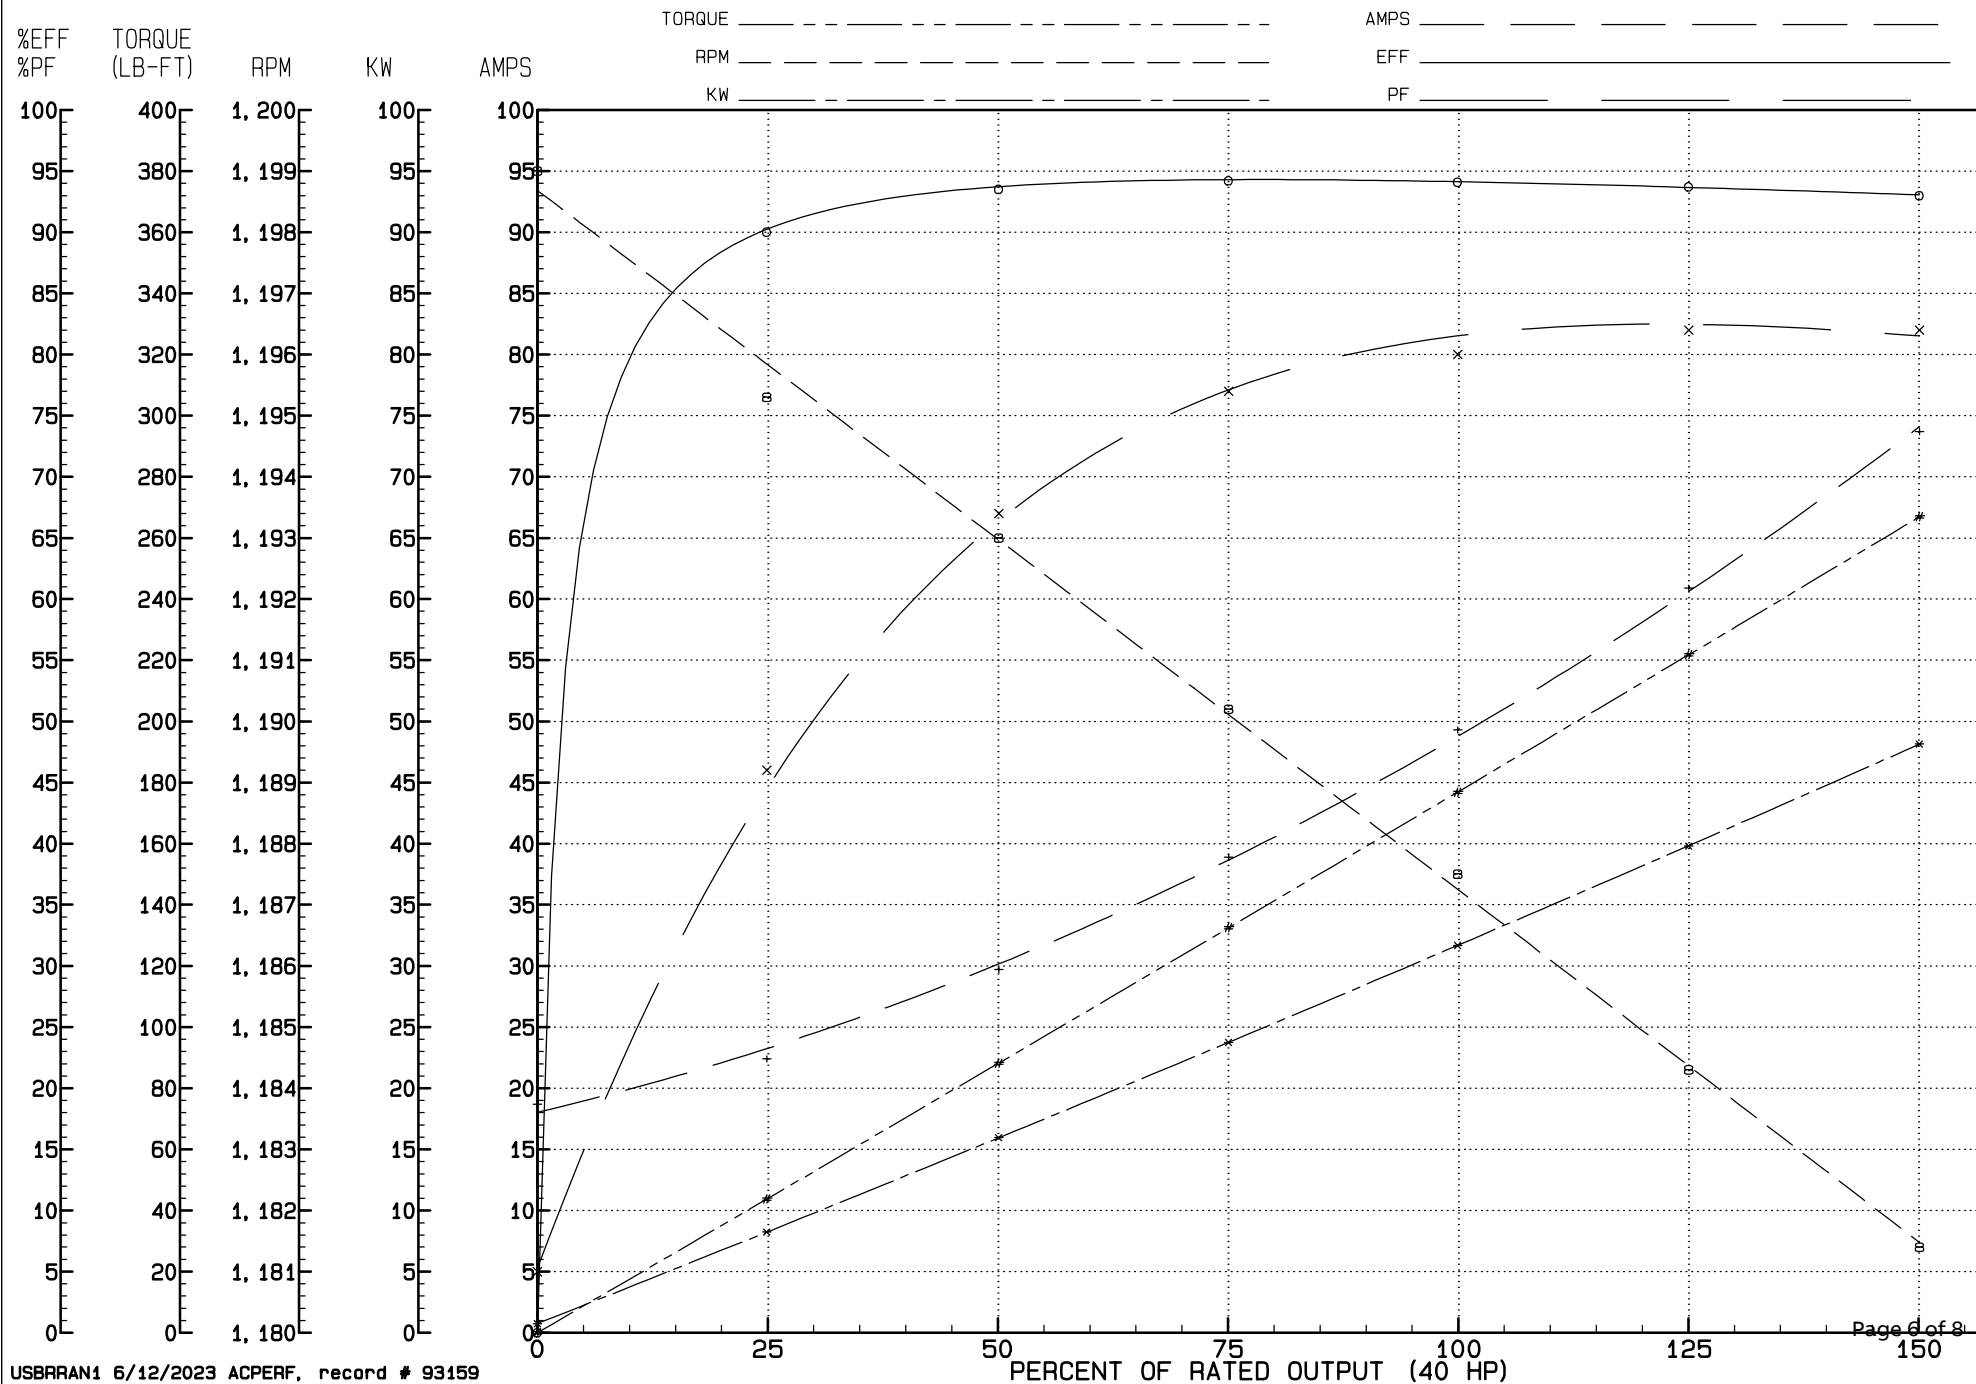

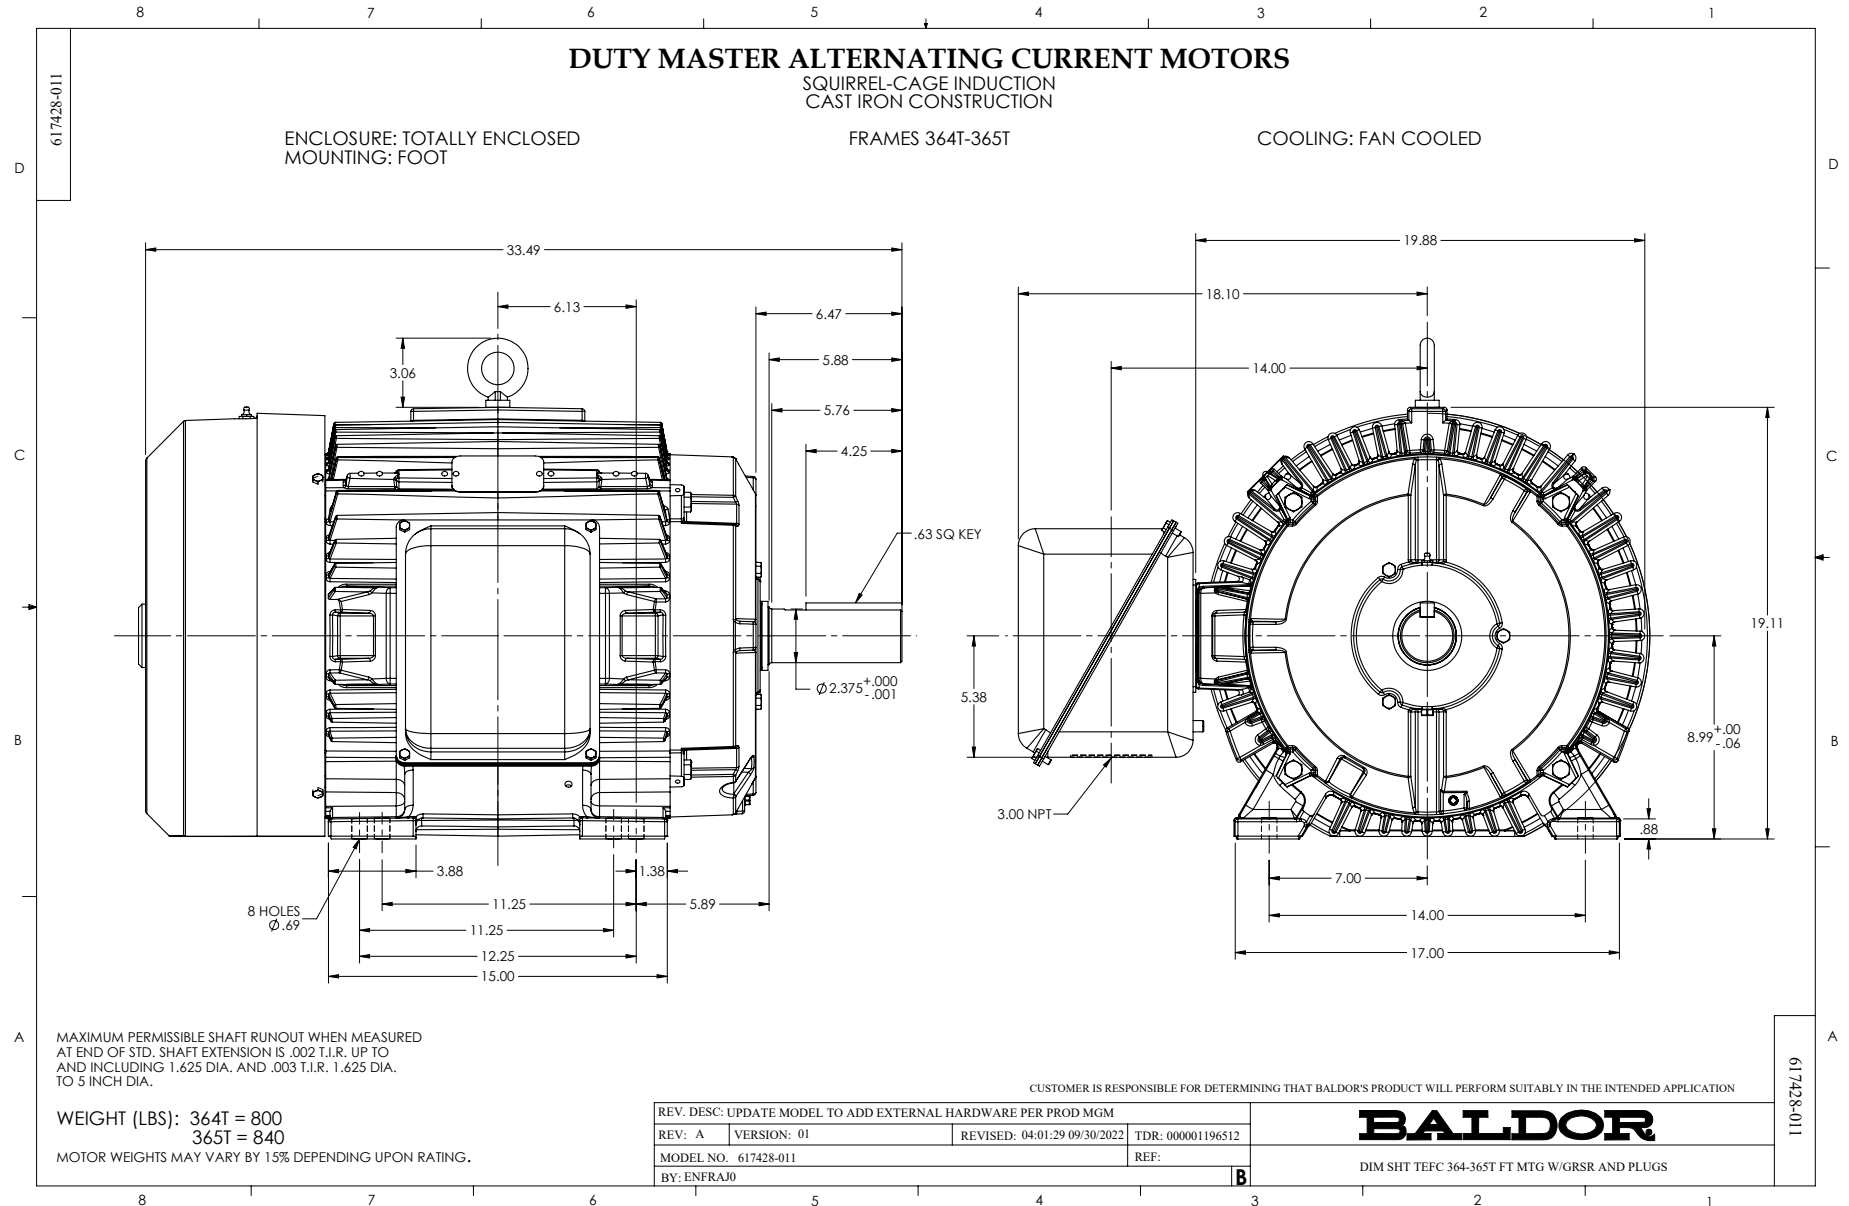

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

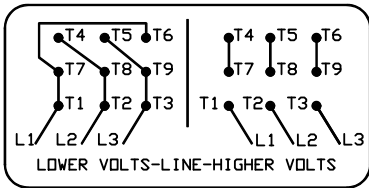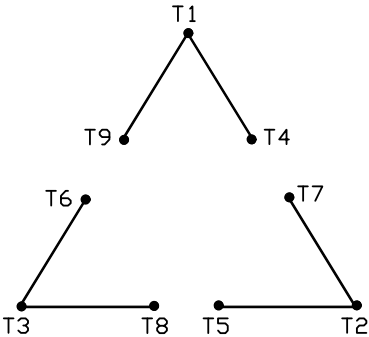

⟨ N. P. 1575-B ⟩

416820-002

REV. DESC: ADJUST TEXT DARKNESS		
REV. LTR: B	VERSION: 02	TDR: 000001285318
FILE: \RAG\00022\453	REVISED: 09:36:26 09/24/2026	BY: USJOSUL
MTL: -	⊙ □	



CONN DIAG - STANDARD 9 LEAD, DELTA-CONNECTED

SH1 of 1