

ABB BALDOR RELIANCE III

Customer information packet

EM4413T-4

150HP, 3570RPM, 3PH, 60HZ, 445TS, A4478M, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	445TS
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	150.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CURUSEEV CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	164.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	164.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	6 @ 2 AWG
Motor Standards	NEMA
Motor Type	A4478M

Part Detail

Revision	S
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG3535
Layout	617435-049
Eff. date	02-16-2026
CD Diagram	416820-036
Poles	02
Leads	3#2 (02 per group)
Proprietary	False
Created date	08-13-2012

Mounting Arrangement	F1
Number of Poles	2
Overall Length	41.08 IN
Power Factor	90
Product Family	Other
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3570 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP2349L															
SPEC NO.	P44G3906			CAT.NO.		EM4413T-4				FRAME		445TS			
HP	150	VOLTS		460		PHASE		3	DESIGN		B	TYPE		P	
RPM	3570	AMPS		164		HZ		60	AMB		40	SF		1.15	
DRIVE END BEARING	65BC03J30X			DUTY		CONT		INSUL.CLASS		F					
OPP D.E. BEARING	65BC03J30X			ENCL		TEFC		CODE		G					
SER.NO.				POWER FACTOR		90		NEMA-NOM-EFFICIENCY				95			
						MAX CORR KVAR			20.0		GUARANTEED EFFICIENCY			94.1	
						NEMA NOM/CSA QUOTED EFF									
						MOTOR WEIGHT									

Accessories

Part number	Description	Multiplier
089490104B	BRKT,DE 089490103WCA, C-Face	P1
089490108A	D-FLANGE EP MACHINING, G28 W/6313 BRG	P1

ABB BALDOR RELIANCE III							CUSTOMER INFORMATION PACKET							EM4413T-4 - 150HP, 3570RPM, 3PH, 60HZ, 445TS, A4478M, TEFC																																		
S/O			FRAME			HP			TYPE			PHASE/ HERTZ			RPM			VOLTS																														
			445			150			P			3/60			3570			460																														
AMPS							DUTY							AMB °C/ INSUL							S.F.							NEMA DESIGN							CODE LETTER							ENCLOSURE						
164							CONT							40/F							1.15							B							G							TEFC						
E/S							ROTOR							TEST S.O.							TEST DATE							STATOR RES. @25 °C OHMS (BETWEEN LINES)																				
0							0							---							---							.0292																				
PERFORMANCE																																																
LOAD							HP							AMPERES							RPM							% POWER FACTOR							% EFFICIENCY													
NO LOAD							0							34.7							3600							6.89							0													
1/4							37.5							59.2							3593							63.9							92.9													
2/4							75.1							90.3							3585							81.7							95.3													
3/4							113							125							3578							87.8							95.7													
4/4							150							164							3570							89.9							95.6													
5/4							187							204							3562							90.4							95.2													
SPEED TORQUE																																																
										RPM							TORQUE % FULL LOAD							TORQUE LB.-FT.							AMPERES																	
LOCKED ROTOR										0							138							304							1081																	
PULL UP										1350							110							242							997																	
BREAKDOWN										3461							280							618							552																	
FULL LOAD										3570							100							221							164																	
AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.																																																
CALCULATED DATA NEMA NOMINAL EFFICIENCY = 95.0 PCT.																																																
										DRAWN BY: <u>CD</u> CHECKED BY: <u>CD</u> APPROVED BY: <u>R. MCELVEEN</u> DATE: <u>1/18/11</u>										AC MOTOR PERFORMANCE DATA							A44WG3535-R001 DATE ISSUED 03/04/20																					

FRAME 445

RPM 3570

S.F. 1.15

ROTOR 0

HP 150

VOLTS 460

NEMA DESIGN B

TEST S.O. CALCULATED DATA

TYPE P

AMPS 164

CODE LETTER G

TEST DATE ---

PHASE / HERTZ 3/60

DUTY CONT

ENCLOSURE TEFC



STATOR RES. @ 25°C .0292

AMB °C / INSUL 40/F

E/S 0

OHMS (BETWEEN LINES)

NEMA NOMINAL EFFICIENCY = 95.0 PCT.

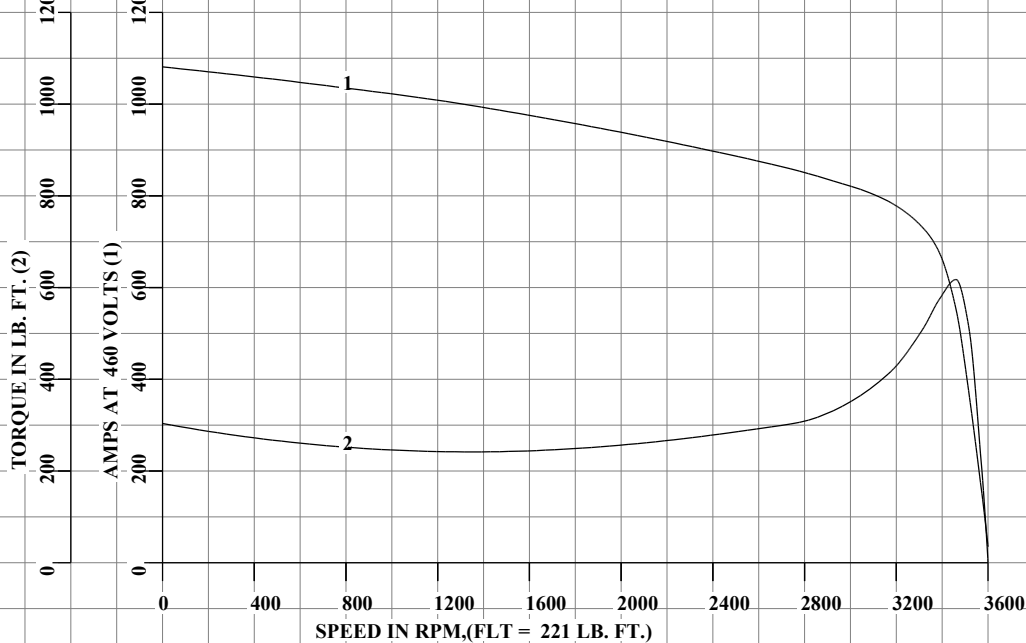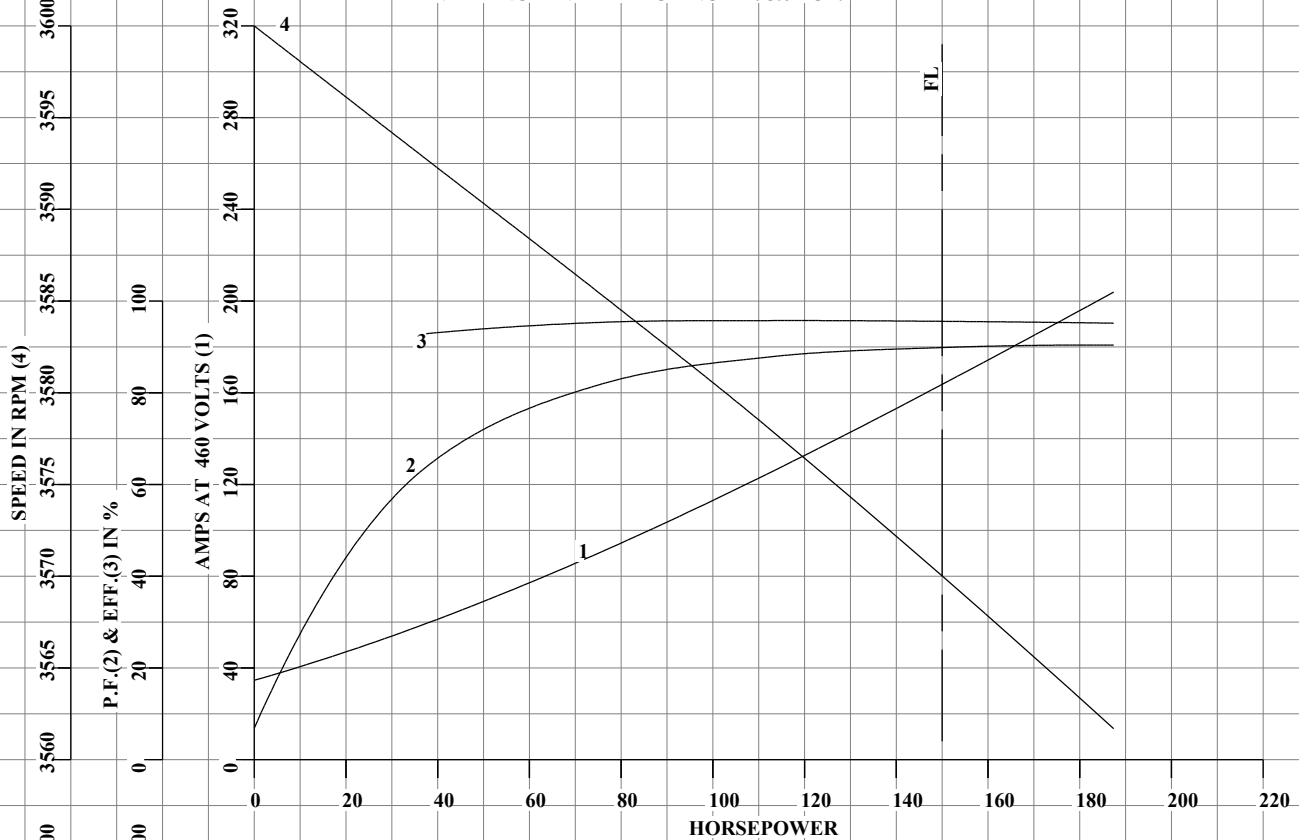

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.





DRAWN BY: CD
CHECKED BY: CD
APPROVED BY: R. MCELVEEN
DATE: 1/18/11

AC MOTOR
PERFORMANCE
DATA

A44WG3535-R001


ISSUE DATE 03/04/2014



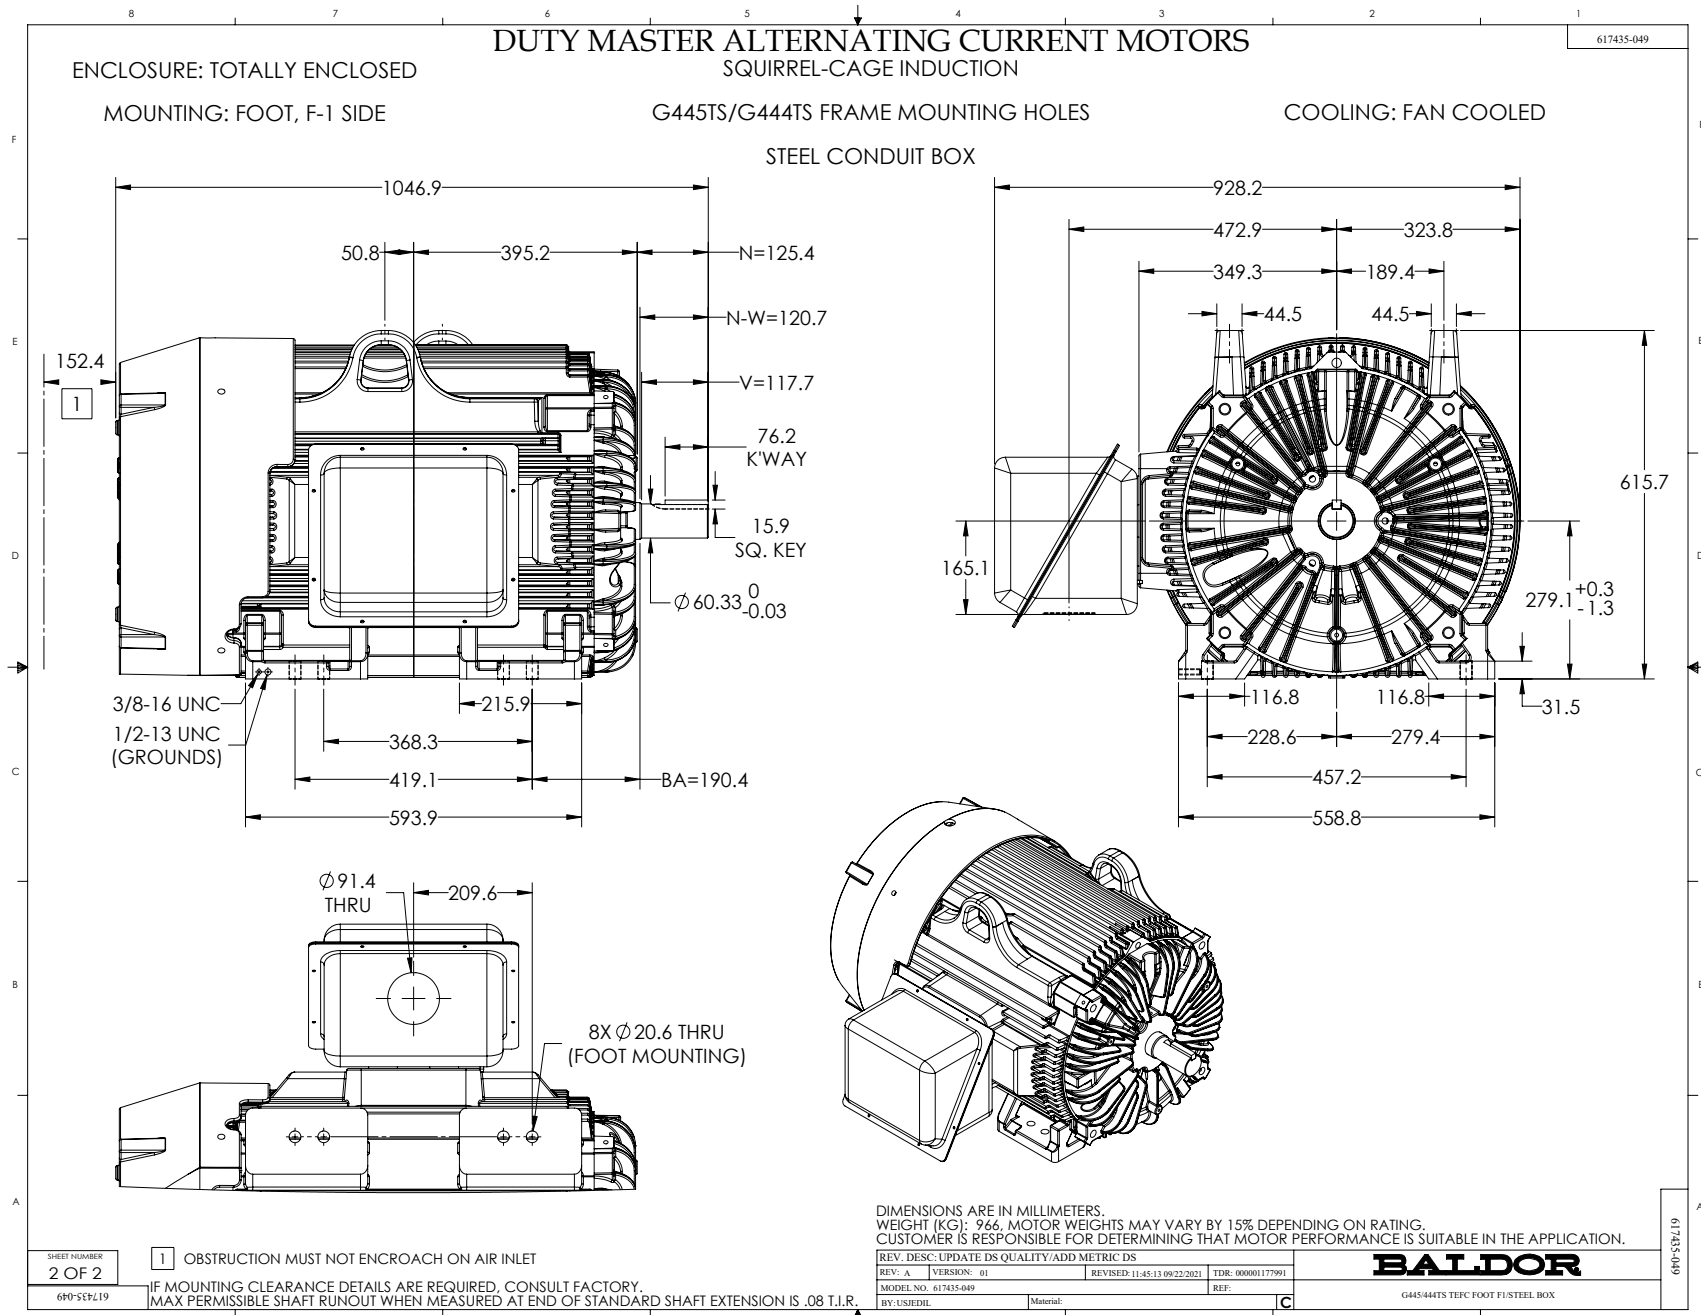

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

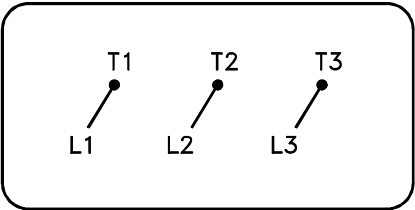

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1