

ABB BALDOR RELIANCE III

Customer information packet

EM44206T-4

200HP, 1190RPM, 3PH, 60HZ, 449T, A44160M, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	449T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	200.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV CURUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	225.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.8 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	225.0 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	G
Lifting Lugs	No Lifting Lugs
Motor Lead Quantity/Wire Size	6 @ 1 AWG
Motor Standards	NEMA

Part Detail

Revision	V
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG1497
Layout	617427-190
Eff. date	11-24-2025
CD Diagram	416820-036
Poles	06
Leads	3#1 (02 per group)
Proprietary	False
Created date	08-14-2012

Motor Type	A44160M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	53.24 IN
Power Factor	87
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1190 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate


NP2349L														
SPEC NO.	P44G3915			CAT.NO.		EM44206T-4				FRAME	449T			
HP	200	VOLTS	460	PHASE		3	DESIGN	B	TYPE	P				
RPM	1190	AMPS	225	HZ		60	AMB	40	SF	1.15				
DRIVE END BEARING	90BC03J30X			DUTY	CONT	INSUL.CLASS		F						
OPP D.E. BEARING	90BC03J30X			ENCL	TEFC	CODE	G							
SER.NO.				POWER FACTOR		87	NEMA-NOM-EFFICIENCY				95.8			
					MAX CORR KVAR	35.0	GUARANTEED EFFICIENCY		95.0					
					NEMA NOM/CSA QUOTED EFF									
					MOTOR WEIGHT									

Accessories

Part number	Description	Multiplier
089490106A	G28 C-FACE BRKT MACH-6318 089490105WCA	P1
089490110A	D-FLANGE BRKT, G28 089490109WCA	P1

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	449T	200	P	3/60	1190	460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
225	CONT	40/F	1.15	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
833245	418143-98-XE	---	---	.0220		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	56.0	1200	4.16	0	
1/4	50.1	86.8	1197	57.2	94.4	
2/4	100	126	1194	77.3	96.1	
3/4	150	173	1191	84.2	96.1	
4/4	200	226	1188	86.6	95.8	
5/4	250	282	1185	87.2	95.2	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	132	1163	1422	
PULL UP		240	96.3	850	1408	
BREAKDOWN		1150	243	2149	811	
FULL LOAD		1188	100	883	226	
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE REMARKS: TYPICAL DATA XE MOTOR-NEMA NOM. EFF. 95.8 % GUARANTEED MIN. EFF. 95.0%						
		DR. BY	G. R. WEBB	A-C MOTOR PERFORMANCE DATA		
		CK. BY	W. L. SMITH			
		APP. BY	W. L. SMITH			
		DATE	10/08/10			
			A44WG1497-R001 ISSUE DATE 01/06/21			

REL S.O.	RPM 1190	S.F. 1.15	ROTOR 418143-98-XE
FRAME 449T	VOLTS 460	NEMA DESIGN B	TEST S.O. TYPICAL DATA
HP 200	AMPS 225	CODE LETTER G	TEST DATE ---
TYPE P	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25 °C .0220
PHASE/HERTZ 3/60	AMB °C/INSUL 40/F	E/S 833245	OHMS (BETWEEN LINES)

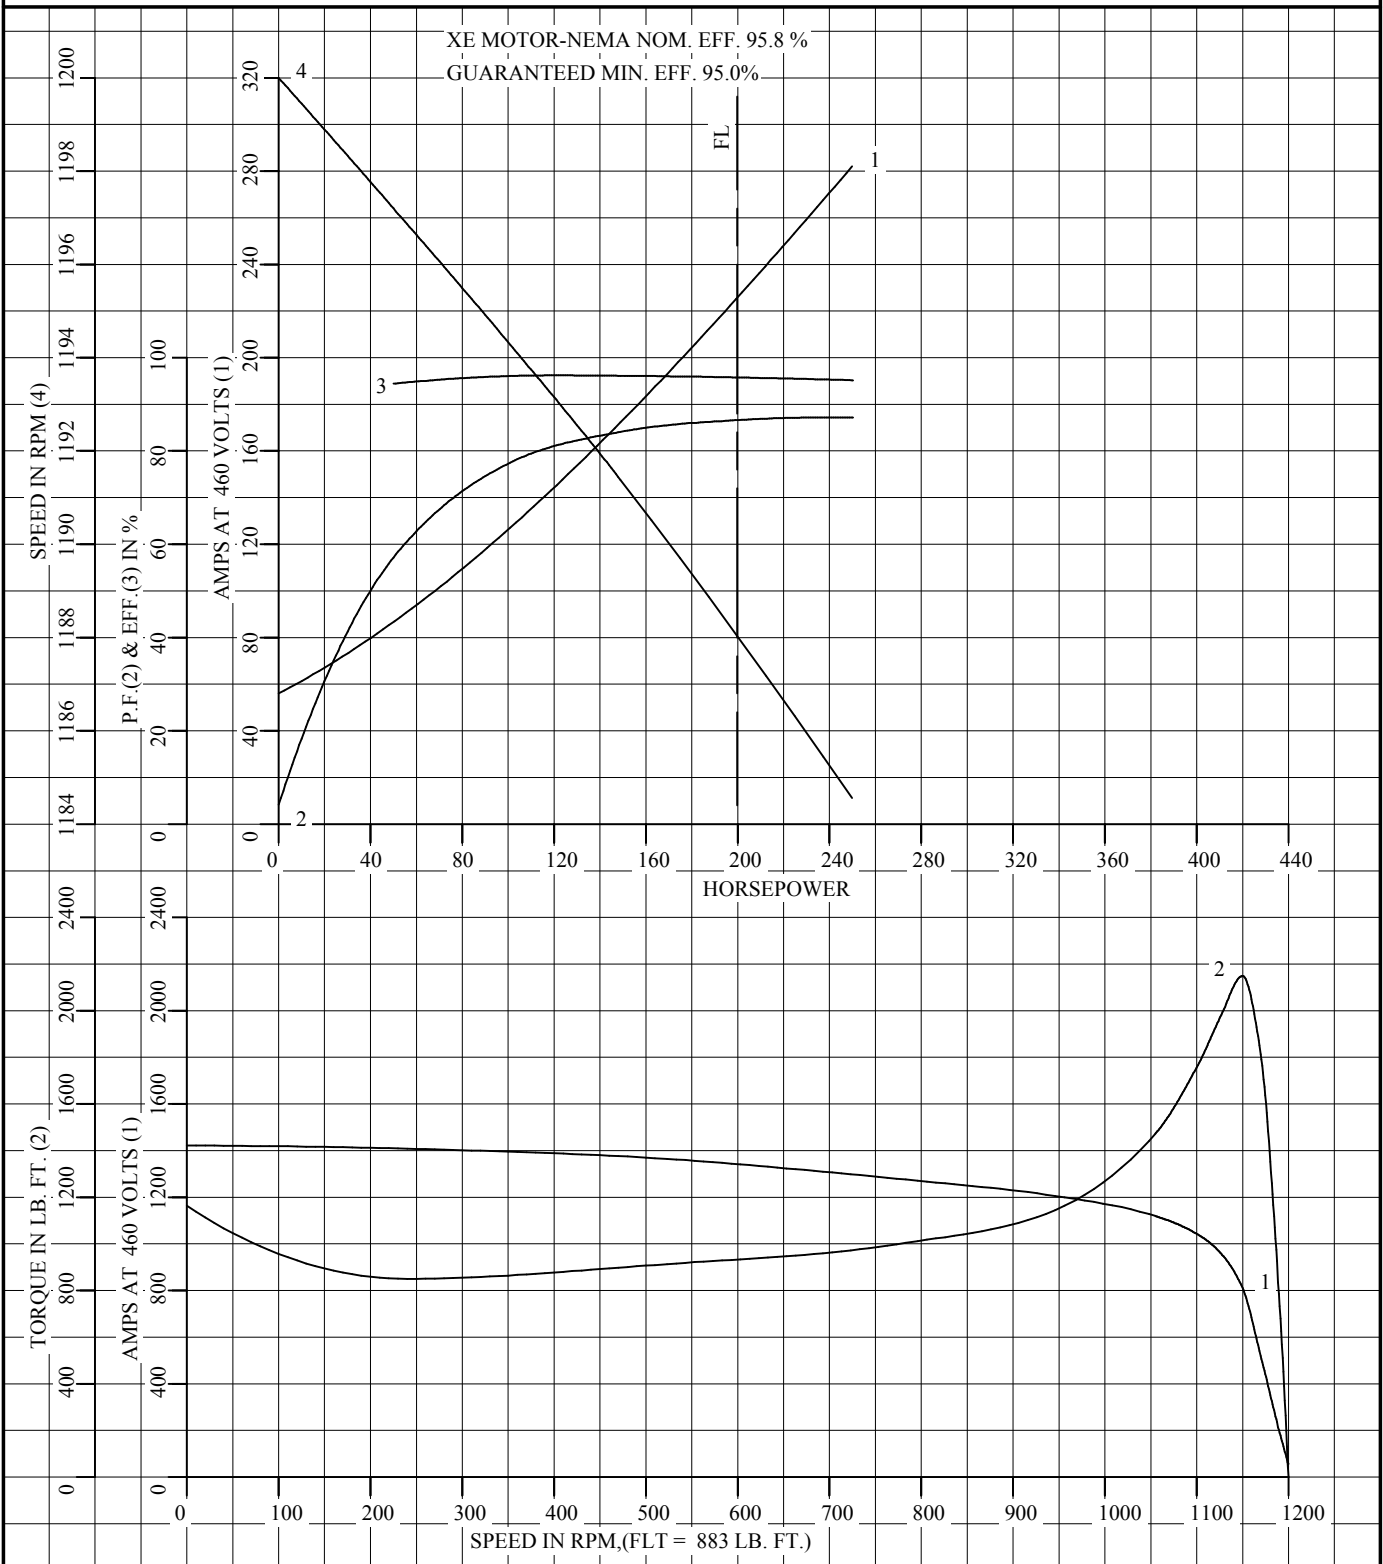

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR
 A MEMBER OF THE ABB GROUP

DR. BY G. R. WEBB
 CK. BY W. L. SMITH
 APP. BY W. L. SMITH
 DATE 10/08/10


**A-C MOTOR
PERFORMANCE
CURVES**

A44WG1497-R001

ISSUE DATE 01/06/21

Page 7 of 11

REL. S.O.	RPM 1190	S.F. 1.15	ROTOR 418143-98-XE
FRAME 449T	VOLTS 460	NEMA DESIGN B	TEST S.O. TYPICAL DATA
HP 200	AMPS 225	CODE LETTER G	TEST DATE ---
TYPE P	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25 °C .0220
PHASE/HERTZ 3/60	AMB °C/INSUL 40/F	E/S 833245	OHMS (BETWEEN LINES)

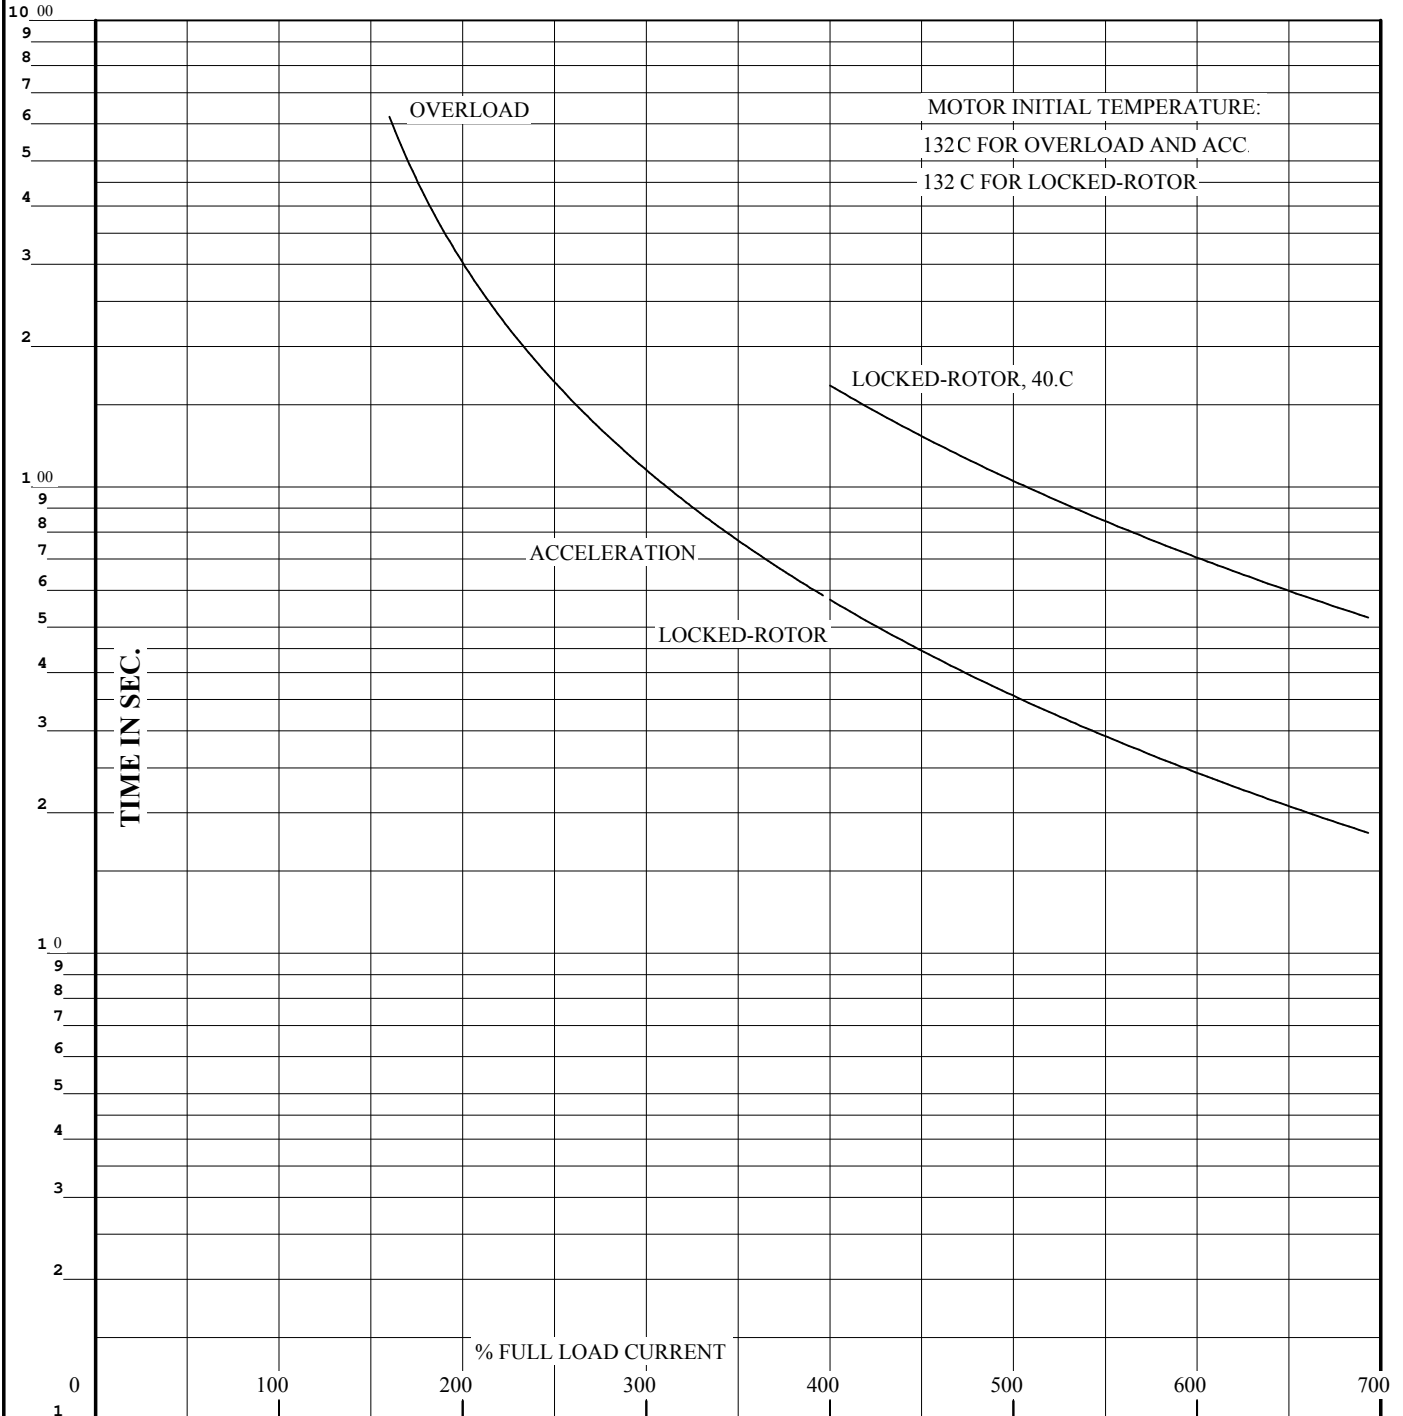

THERMAL LIMIT CURVE

REMARKS: XE MOTOR-NEMA NOM. EFF. 95.8 %
GUARANTEED MIN. EFF. 95.0%

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.




DR. BY	G. R. WEBB
CK. BY	W. L. SMITH
APP. BY	W. L. SMITH
DATE	10/08/10

**A-C MOTOR
PERFORMANCE
CURVES**


A44WG1497-R001
ISSUE DATE 01/06/21 Page 8 of 11

INCLUDES G447T FRAME MOUNTING HOLES



- G449T/447T TEFC W/ AIR-DEFLECTOR FI FT MTG


INCLUDES G447T FRAME MOUNTING HOLES



- G449T/447T TEFC W/ AIR-DEFLECTOR FI FT MTG

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

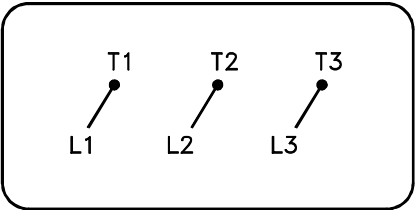

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1