

ABB BALDOR RELIANCE III

Customer information packet

ENCP83580T-4

1HP, 3450RPM, 3PH, 60HZ, 143T, 0520M, TENV, F1

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TENV
Frame	143T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	1.8
Current @ Voltage	1.300 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	77.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None

Part Detail

Revision	AM
Type	AC
Mech. spec.	05E276
Base	
Status	PRD/A
Elec. spec.	05WGW634
Layout	05LYE276
Eff. date	07-01-2022
CD Diagram	CD0006
Poles	02
Leads	3#18 15" LEAD LENGTH,0#0 Dbl Dip & Bake,0#0 Phase InsulaY
Proprietary	False
Created date	11-20-2007

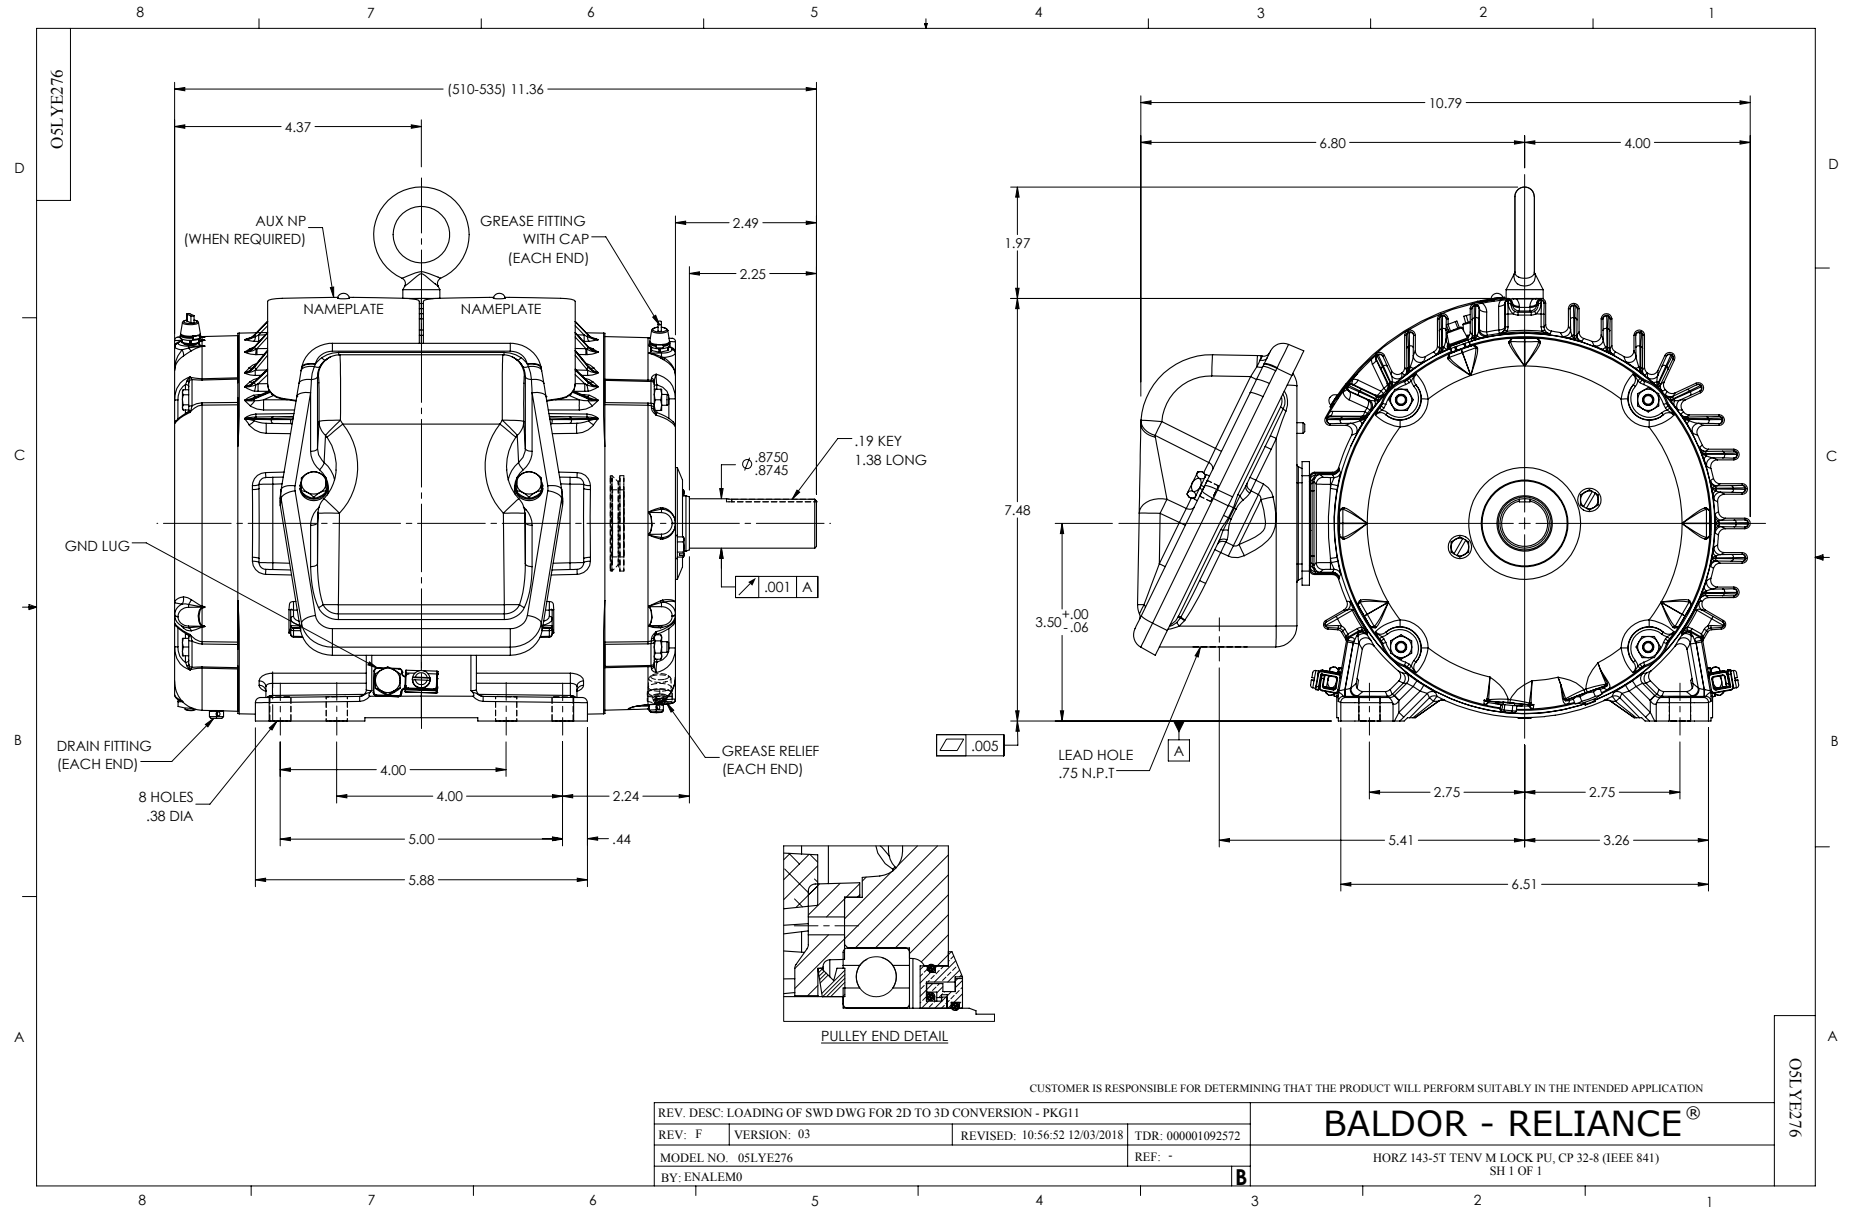
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	1.3 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	@ 0 AWG 3 @ 18 AWG
Motor Lead Termination	Ring Terminals
Motor Standards	NEMA
Motor Type	0520M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	11.37 IN
Power Factor	88
Product Family	Super-E Chemical Processing
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3490 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None

Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

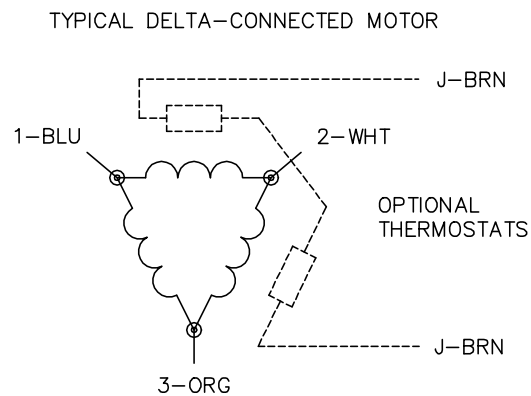
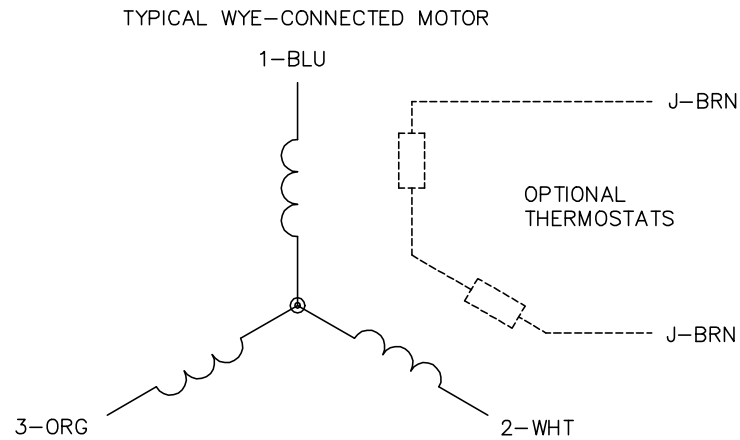
Nameplate

NP4328									
CAT.NO.	ENCP83580T-4								
SPEC.	05E276W634G1								
HP	1 TE				IP	56			
VOLTS	460								
AMPS	1.3								
R.P.M.	3490								
FRAME	143T		HZ		60		PH	3	
SER.F.	1.15	CODE	J	DES.	B	CLASS		F	
RATING	40C AMB-CONT								
SN									
DE	6205		ODE		6203				
NEMA NOM. EFF.	77		P.F.		88				
GUAR. MIN. EFF.	74		CC		010A				
T. CODE	T3C		TEMP=		160				

NP3186									
SPEC.	05E276W634G1								
ABMA DE BRG	25BC02X30X								
ABMA ODE BRG	17BC02XP30X								
GREASE	POLYREX EM								
MOTOR WEIGHT	56	ROTOR BARS		20	STATOR BARS		24		
MAX. R.P.M.	5400	MAX. KVAR		.05					
INV.TYPE	PWM								
T=	160								
CHP	60	TO	90						
CT	1.8	TO	60						
VT	-0	TO	60						
HTR-VOLTS	N/A	HTR-AMPS		N/A					
HTR-WATTS	N/A	MAX. SPACE HEATER TEMP.					N/A		



CD0006


NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: —


BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1