

ABB BALDOR RELIANCE III

Customer information packet

JMFSWDM3558T-E

2HP, 1760RPM, 3PH, 60HZ, 145JM, 3532M, TEFC, N

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	145JM
Frame Material	Stainless Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA PREMIUM WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	5.600 A @ 230.0 V 6.000 A @ 208.0 V 2.800 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater

Part Detail

Revision	-
Type	AC
Mech. spec.	35E4781
Base	
Status	PRD/A
Elec. spec.	35WGK632
Layout	35LYE4781
Eff. date	03-04-2025
CD Diagram	CD0005
Poles	04
Leads	9#18
Proprietary	False
Created date	02-28-2025

High Voltage Full Load Amps	2.8 a
Insulation Class	H
Inverter Code	Inverter Duty
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Finish	UNPAINTED
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3532M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	16.15 IN
Power Factor	77
Product Family	WD All SS Encapsulated
Pulley End Bearing Type	Sealed Bearing
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4427AAA01													
CAT #	JMFSWDM3558T-E					WT	51	LBS					
SPEC	35E4781K632G1					ENCL	TEFC						
SER #						CC	010A	IP	69				
HP	2	MAG CUR				3.2/1.6							
VOLTS	230/460					NEMA NOM. EFF					86.5		
AMPS	5.6/2.8					PF	77						
RATING	40C AMB-CONT												
RPM	1760					MAX RPM	2700						
FRAME	145JM	HZ	60	CODE		L	CLASS	H					
SER.F.	1.15	SF AMP	6.3/3.15				PH	3	DES	B			
DE	6206		ODE	6205									
LUBRICATION	POLYREX EM												
ID LOGO	INVERTER TYPE			VPWM		CHP	60	TO	90	1.5:1			
ID LOGO	WK2	0.232	CT	15	TO	60	4:1						
ID LOGO	SL HZ	1.2	VT	3	TO	60	20:1						
							QR						
YR													

AC Induction Motor Performance Data

Record # 111071

Typical performance - not guaranteed values

Winding: 35WGK632-R001			Type: 3532M		Enclosure: TEFC	
Nameplate Data			460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		2	Full Load Torque		6.01 LB-FT	
Volts		230/460	Start Configuration		direct on line	
Full Load Amps		5.6/2.8	Breakdown Torque		22.9 LB-FT	
R.P.M.		1760	Pull-up Torque		12.9 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		16.3 LB-FT
NEMA Design Code		B	KVA Code	Starting Current		24.4 A
Service Factor (S.F.)		1.15	No-load Current		1.55 A	
NEMA Nom. Eff.		86.5	Power Factor	Line-line Res. @ 25°C		8.6033 Ω
Rating - Duty		40C	AMB-CONT	Temp. Rise @ Rated Load		66°C
S.F. Amps		6.3/3.15	Temp. Rise @ S.F. Load		81°C	
			Locked-rotor Power Factor		53.6	
			Rotor inertia		0.231 lb-ft²	

Load Characteristics 460 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	37	57	70	78	82	85	80
Efficiency	78.6	85.5	86.9	86.6	85.5	84	85.9
Speed	1789.9	1780.7	1770.8	1760.2	1748.4	1735.8	1753
Line amperes	1.67	1.94	2.33	2.81	3.35	3.94	3.13


ABB Motors and Mechanical Inc.


WINDING # 35WGK632

Typical performance - not guaranteed values.




2 HP 3 PH 60 HZ 1760 RPM 460 V 3532M

TORQUES (LB-FT): PO=22.9 PU=12.9 LR=16.3 LRA=24.4

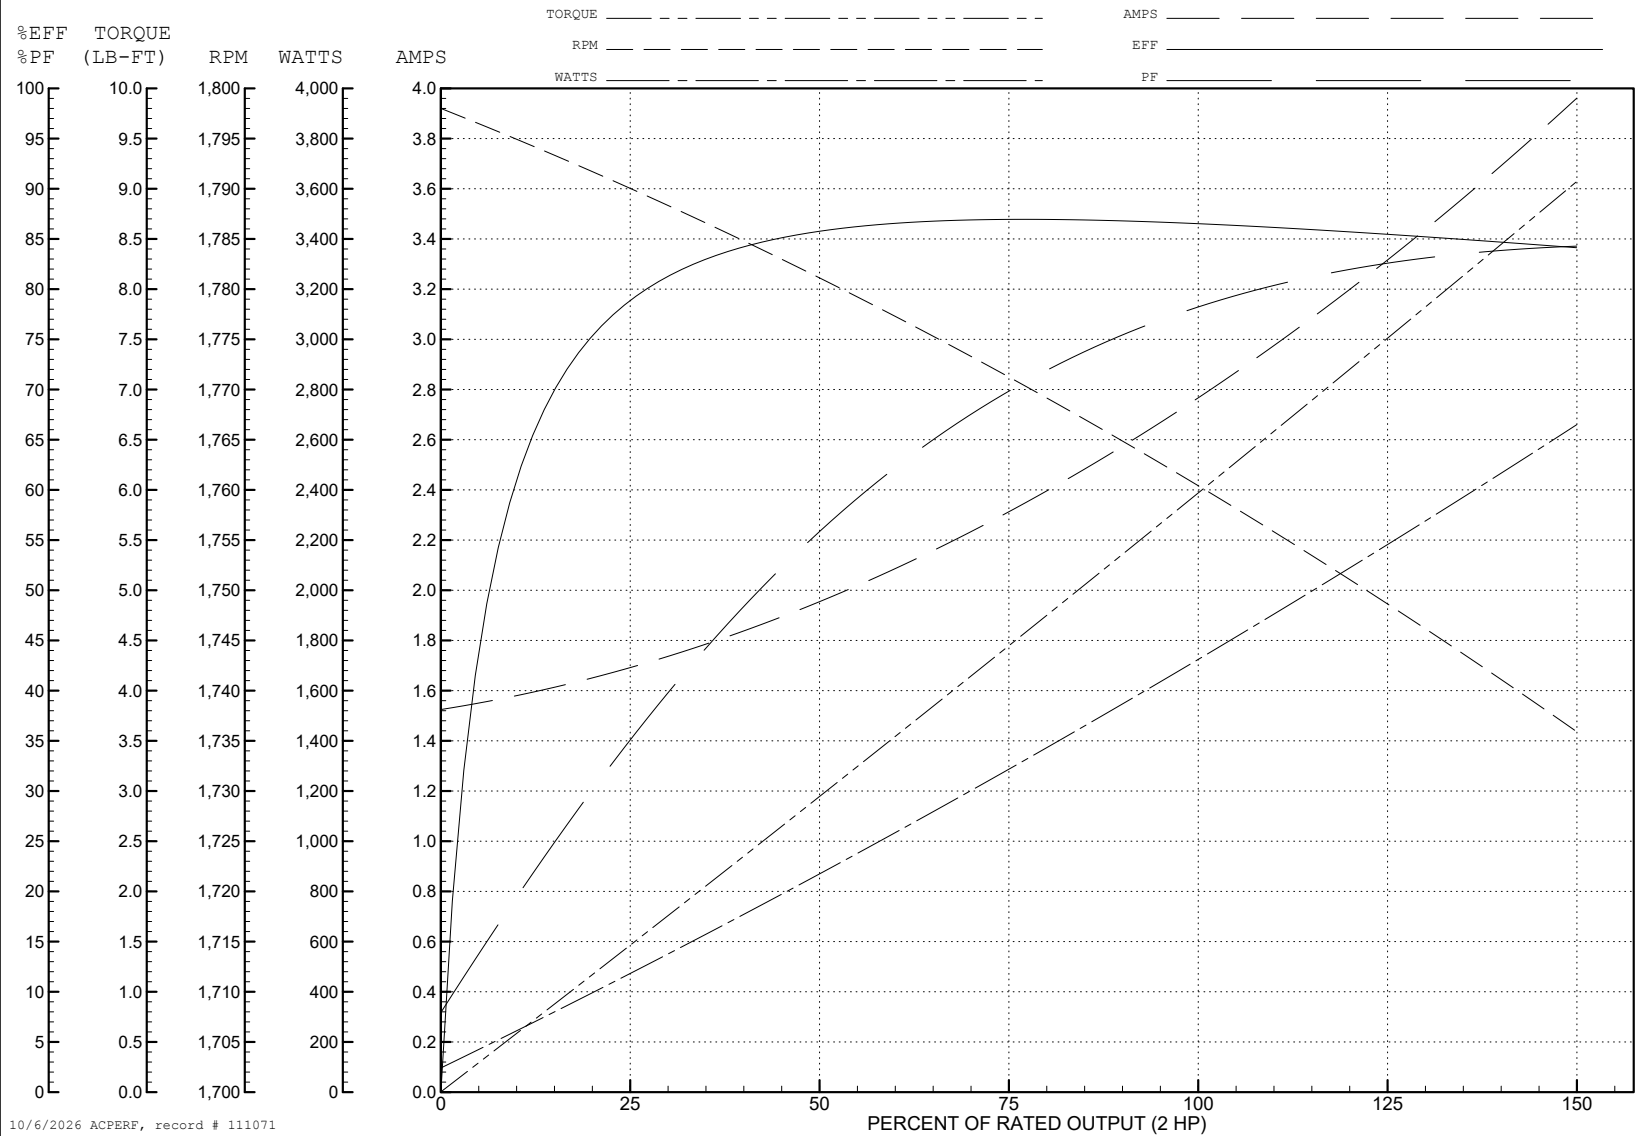

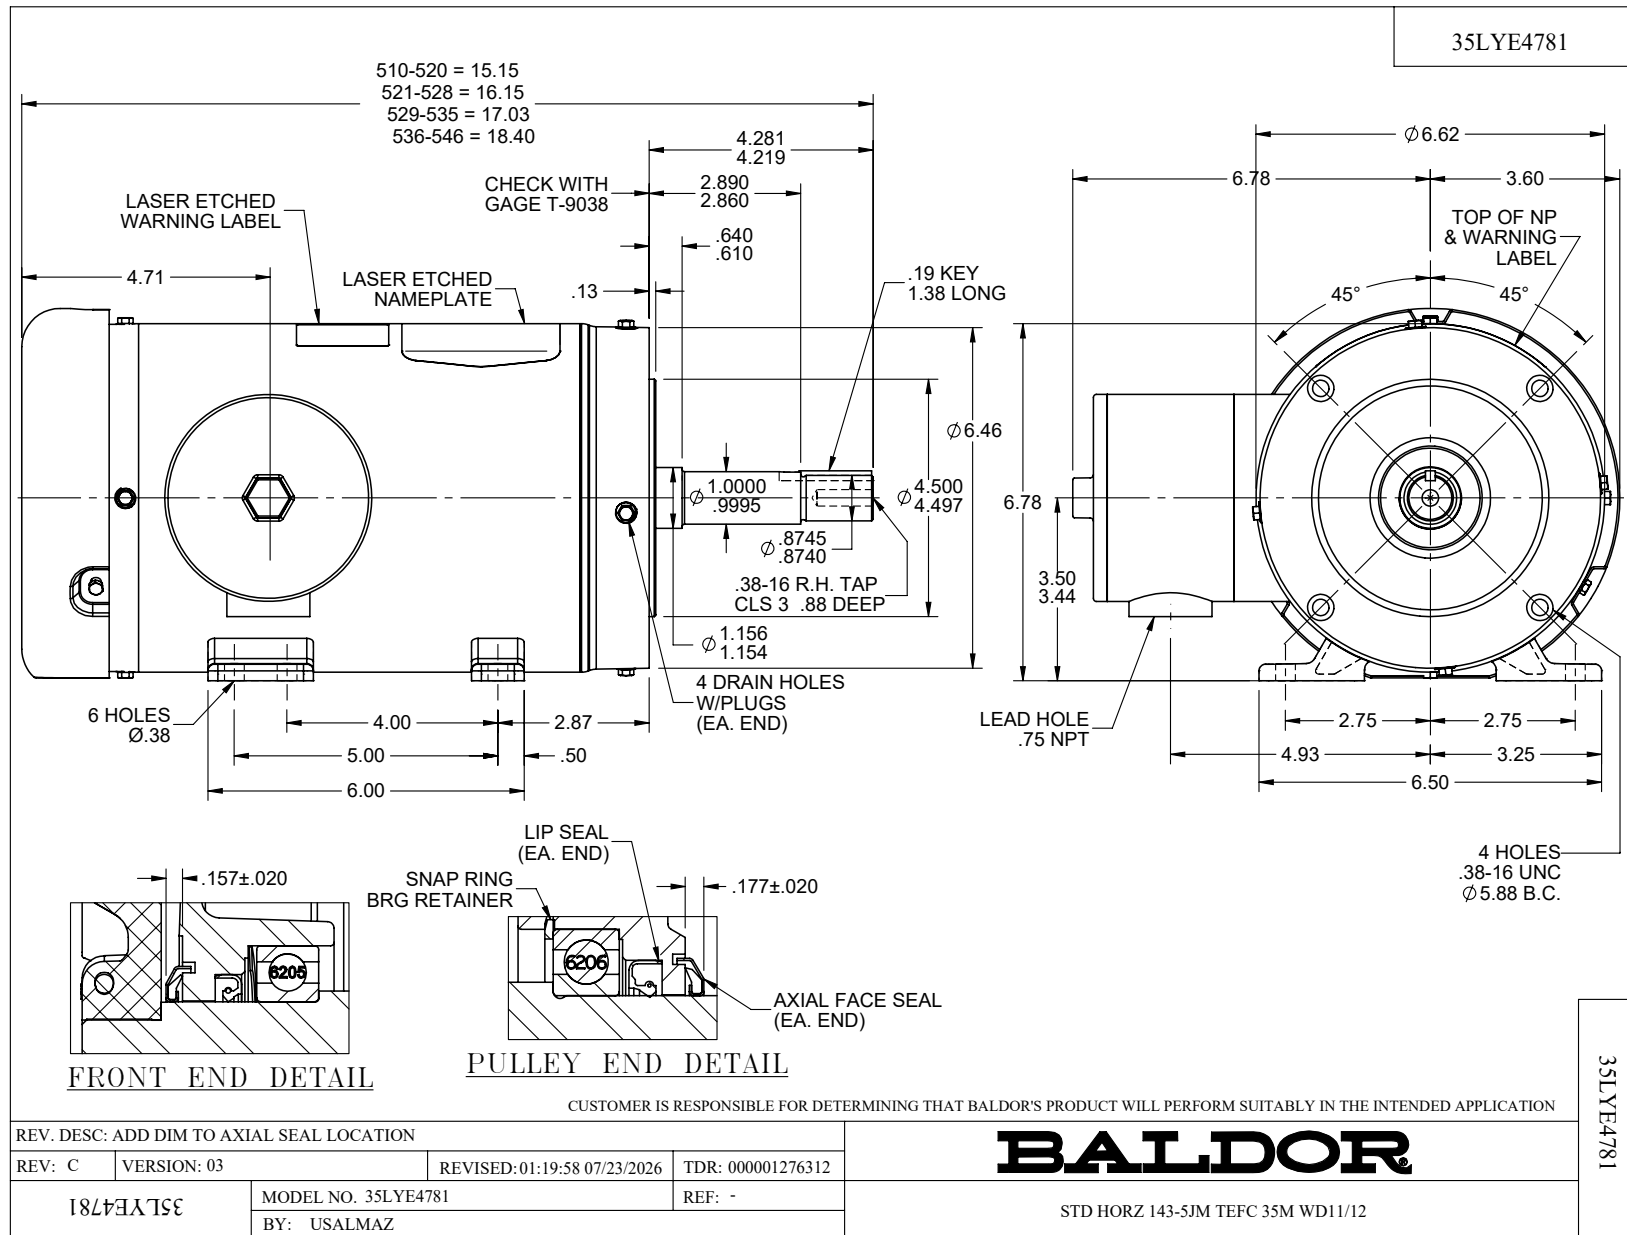

CD0005

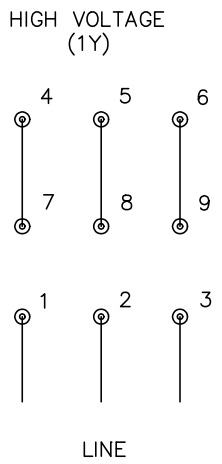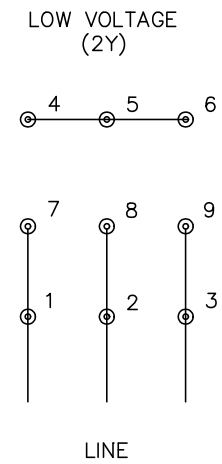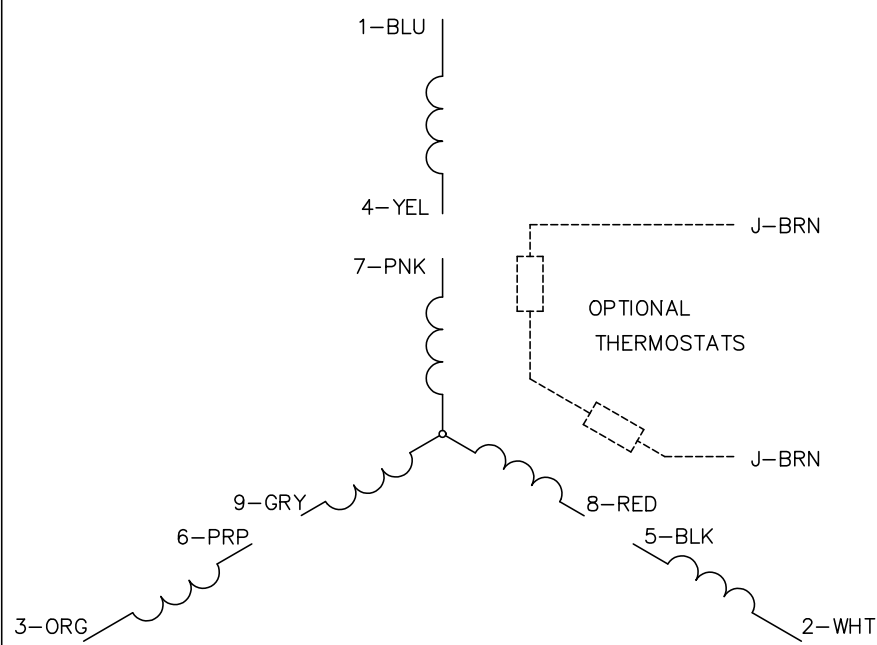

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005