

ABB BALDOR RELIANCE III

Customer information packet

L3504-50

.5/.37KW, 1425RPM, 1PH, 50HZ, 56, 3424LC, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.370 KW @ 50 HZ
Phase	1
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	110.0 V @ 50 HZ 220.0 V @ 50 HZ
Agency Approvals	C UR US CE CURUS UKCA WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	5.000 A @ 110.0 V 2.500 A @ 220.0 V
Design Code	-
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	72.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None

Part Detail

Revision	G
Type	AC
Mech. spec.	34G375
Base	
Status	PRD/A
Elec. spec.	34WGR778
Layout	34LYG375
Eff. date	06-15-2026
CD Diagram	CD0055
Poles	04
Leads	6#18
Proprietary	False
Created date	10-10-2023

Heater Indicator	No Heater
High Voltage Full Load Amps	2.5 a
Insulation Class	B
Inverter Code	Not Inverter
KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3424LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	11.97 IN
Power Factor	93
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1425 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1372L												
CAT.NO.	L3504-50											
SPEC.	34G375R778											
HP	.5/.37KW											
VOLTS	110/220											
AMP	5/2.5											
R.P.M. (1/MIN)	1425											
FRAME	56	HZ		50			PH		1			
SER.F.	1.25	CODE		J	DES		-	CL	B			
NEMA-NOM-EFF	72.7	PF		93								
RATING	40C AMB-S1 CONT											
CC			IP44 IC411 19KG									
DE	6203			ODE		6203						
ENCL	TEFC	SN										
	IE2-50HZ 68(75%),60 (50%)											

Accessories

Part number	Description	Multiplier
34-171	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 101512

Typical performance - not guaranteed values

Winding: 34WGR778-R002			Type: 3424LC		Enclosure: TEFC	
Nameplate Data				220 V, 50 Hz: High Voltage Connection		
Rated Output (KW)		.37		Full Load Torque		1.811 LB-FT
Volts		110/220		Start Configuration		direct on line
Full Load Amps		5/2.5		Breakdown Torque		4.92 LB-FT
R.P.M.		1425		Pull-up Torque		4.25 LB-FT
Hz		50 Phase		Locked-rotor Torque		5.35 LB-FT
NEMA Design Code		- KVA Code		Starting Current		18.6 A
Service Factor (S.F.)		1.25		No-load Current		1.33 A
NEMA Nom. Eff.		72.7 Power Factor		Line-line Res. @ 25°C		4.8692 Ω A Ph 4.0443 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		53°C
S.F. Amps		6/3		Temp. Rise @ S.F. Load		63°C

Load Characteristics 220 V, 50 Hz, 0.37 KW

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	66	79	86	90	92	93	92
Efficiency	44	61.6	69.4	72.8	73.8	73.1	73.8
Speed	1484.9	1473.4	1460.5	1446.1	1429	1408.9	1429
Line amperes	1.47	1.74	2.14	2.58	3.1	3.69	3.1


ABB Motors and Mechanical Inc.

WINDING # 34WGR778

Typical performance - not guaranteed values.

0.37 KW 1 PH 50 HZ 1425 RPM 220 V 3424LC

TORQUES (LB-FT) : PO=4.92 PU=4.25 LR=5.35 LRA=18.6

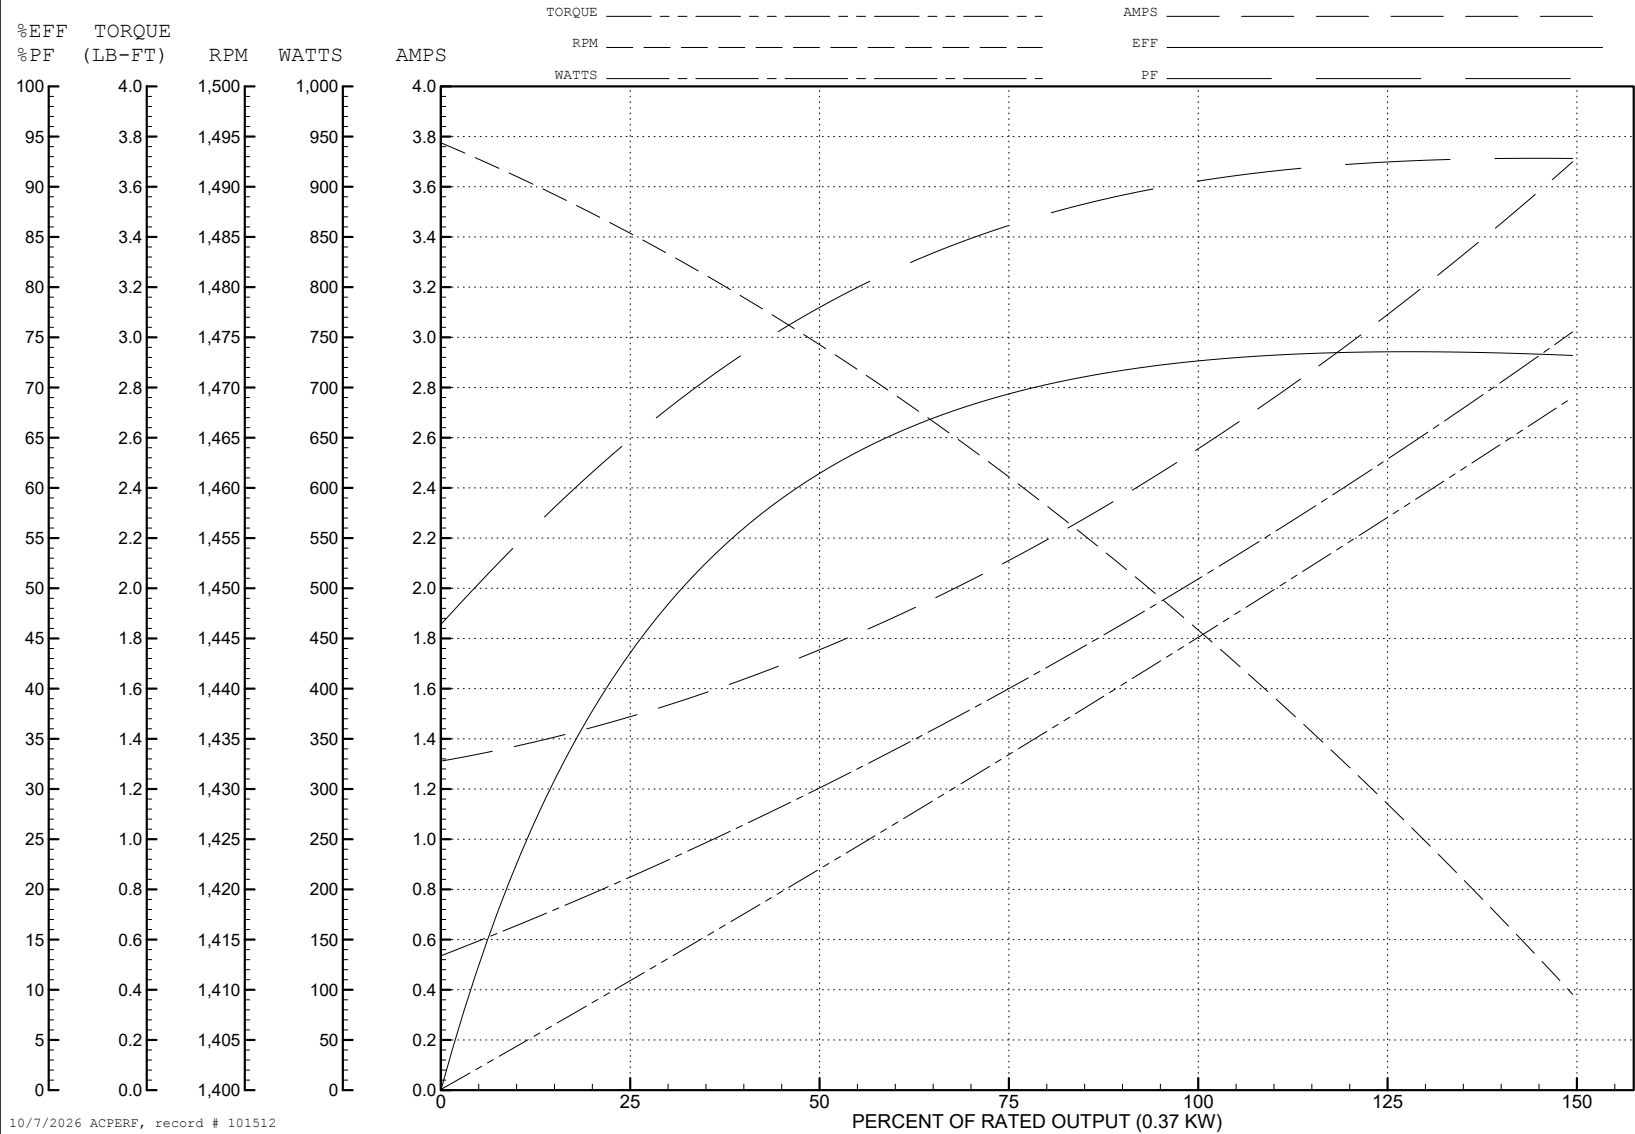



CD0055

