

# ABB BALDOR RELIANCE III

---

## Customer information packet

### PCL3519M

3HP, 3450RPM, 1PH, 60HZ, 56C, 3532LC, TEFC, F1

Class - None

Division - Not Applicable

**Specifications**

|                                |                                          |
|--------------------------------|------------------------------------------|
| Enclosure                      | TEFC                                     |
| Frame                          | 56C                                      |
| Frame Material                 | Steel                                    |
| Frequency                      | 60.00 Hz                                 |
| Haz Area Class and Group       | None                                     |
| Haz Area Division              | Not Applicable                           |
| Motor Letter Type              | Cap Start, Cap Run                       |
| Output @ Frequency             | 3.000 HP @ 60 HZ                         |
| Phase                          | 1                                        |
| Synchronous Speed @ Frequency  | 3600 RPM @ 60 HZ                         |
| Voltage @ Frequency            | 230.0 V @ 60 HZ                          |
| Agency Approvals               | UR<br>CSA                                |
| Ambient Temperature            | 40 °C                                    |
| Auxiliary Box                  | NO AUXILLARY BOX                         |
| Auxiliary Box Lead Termination | None                                     |
| Base Indicator                 | Rigid                                    |
| Bearing Grease Type            | Polyrex EM (-20F +300F)                  |
| Blower                         | None                                     |
| Current @ Voltage              | 12.500 A @ 230.0 V<br>13.700 A @ 208.0 V |
| Design Code                    | L                                        |
| Drip Cover                     | No Drip Cover                            |
| Duty Rating                    | CONT                                     |
| Efficiency @ 100% Load         | 78.0 %                                   |
| Electrically Isolated Bearing  | Not Electrically Isolated                |
| Feedback Device                | NO FEEDBACK                              |
| Front Face Code                | Standard                                 |
| Front Shaft Indicator          | None                                     |
| Heater Indicator               | No Heater                                |
| High Voltage Full Load Amps    | 12.5 a                                   |
| Insulation Class               | F                                        |

**Part Detail**

|              |                    |
|--------------|--------------------|
| Revision     | AL                 |
| Type         | AC                 |
| Mech. spec.  | 35T974             |
| Base         |                    |
| Status       | PRD/A              |
| Elec. spec.  | 35WGY870           |
| Layout       | 35LYT974           |
| Eff. date    | 05-07-2024         |
| CD Diagram   | CD0002A02          |
| Poles        | 02                 |
| Leads        | 2#14 A PH,3#18 B&J |
| Proprietary  | False              |
| Created date | 06-22-2007         |

|                                      |                         |
|--------------------------------------|-------------------------|
| <b>Inverter Code</b>                 | Not Inverter            |
| <b>KVA Code</b>                      | G                       |
| <b>Lifting Lugs</b>                  | No Lifting Lugs         |
| <b>Locked Bearing Indicator</b>      | Locked Bearing          |
| <b>Motor Lead Exit</b>               | Ko Box                  |
| <b>Motor Lead Quantity/Wire Size</b> | 2 @ 14 AWG, A PH        |
| <b>Motor Lead Termination</b>        | Flying Leads            |
| <b>Motor Standards</b>               | NEMA                    |
| <b>Motor Type</b>                    | 3532LC                  |
| <b>Mounting Arrangement</b>          | F1                      |
| <b>Number of Poles</b>               | 2                       |
| <b>Overall Length</b>                | 14.12 IN                |
| <b>Power Factor</b>                  | 95                      |
| <b>Product Family</b>                | General Purpose         |
| <b>Pulley End Bearing Type</b>       | Ball                    |
| <b>Pulley Face Code</b>              | C-Face                  |
| <b>Pulley Shaft Indicator</b>        | Standard                |
| <b>Rodent Screen</b>                 | None                    |
| <b>RoHS Status</b>                   | ROHS COMPLIANT          |
| <b>Service Factor</b>                | 1.15                    |
| <b>Shaft Diameter</b>                | 0.625 IN                |
| <b>Shaft Extension Location</b>      | Pulley End              |
| <b>Shaft Ground Indicator</b>        | No Shaft Grounding      |
| <b>Shaft Rotation</b>                | Reversible              |
| <b>Shaft Slinger Indicator</b>       | No Slinger              |
| <b>Speed</b>                         | 3450 rpm                |
| <b>Speed Code</b>                    | Single Speed            |
| <b>Starting Method</b>               | Direct on line          |
| <b>Thermal Device - Bearing</b>      | None                    |
| <b>Thermal Device - Winding</b>      | Do Not Use              |
| <b>Vibration Sensor Indicator</b>    | No Vibration Sensor     |
| <b>Winding Thermal 1</b>             | Manual Thermal Overload |
| <b>Winding Thermal 1 Location</b>    | KO                      |
| <b>Winding Thermal 2</b>             | None                    |

**Nameplate**

| NP1257L      |              |      |      |     |    |    |   |    |   |  |  |
|--------------|--------------|------|------|-----|----|----|---|----|---|--|--|
| CAT.NO.      | PCL3519M     |      |      |     |    |    |   |    |   |  |  |
| SPEC.        | 35T974Y870   |      |      |     |    |    |   |    |   |  |  |
| HP           | 3            |      |      |     |    |    |   |    |   |  |  |
| VOLTS        | 230          |      |      |     |    |    |   |    |   |  |  |
| AMP          | 12.5         |      |      |     |    |    |   |    |   |  |  |
| RPM          | 3450         |      |      |     |    |    |   |    |   |  |  |
| FRAME        | 56C          |      |      | HZ  | 60 |    |   | PH | 1 |  |  |
| SER.F.       | 1.15         | CODE | G    | DES | L  | CL | F |    |   |  |  |
| NEMA-NOM-EFF | 85.5         | PF   | 95   |     |    |    |   |    |   |  |  |
| RATING       | 40C AMB-CONT |      |      |     |    |    |   |    |   |  |  |
| CC           |              |      |      |     |    |    |   |    |   |  |  |
| DE           | 6205         | ODE  | 6203 |     |    |    |   |    |   |  |  |
| ENCL         | TEFC         | SN   |      |     |    |    |   |    |   |  |  |

**AC Induction Motor Performance Data**

Record # 10351

Typical performance - not guaranteed values

| Winding: 35WGY870-R001 |  |      | Type: 3532LC                          |  | Enclosure: TEFC         |                       |            |                            |
|------------------------|--|------|---------------------------------------|--|-------------------------|-----------------------|------------|----------------------------|
| Nameplate Data         |  |      | 230 V, 60 Hz:<br>Single Voltage Motor |  |                         |                       |            |                            |
| Rated Output (HP)      |  | 3    | Full Load Torque                      |  | 4.6 LB-FT               |                       |            |                            |
| Volts                  |  | 230  | Start Configuration                   |  | direct on line          |                       |            |                            |
| Full Load Amps         |  | 12.5 | Breakdown Torque                      |  | 11.5 LB-FT              |                       |            |                            |
| R.P.M.                 |  | 3450 | Pull-up Torque                        |  | 9.3 LB-FT               |                       |            |                            |
| Hz                     |  | 60   | Phase                                 |  | 1                       | Locked-rotor Torque   | 10.5 LB-FT |                            |
| NEMA Design Code       |  | L    | KVA Code                              |  | G                       | Starting Current      |            | 77 A                       |
| Service Factor (S.F.)  |  | 1.15 | No-load Current                       |  | 2.6 A                   |                       |            |                            |
| NEMA Nom. Eff.         |  | 85.5 | Power Factor                          |  | 95                      | Line-line Res. @ 25°C |            | 3.06 Ω A Ph<br>1.45 Ω B Ph |
| Rating - Duty          |  | 40C  | AMB-CONT                              |  | Temp. Rise @ Rated Load |                       | 47°C       |                            |
| S.F. Amps              |  |      | Temp. Rise @ S.F. Load                |  | 56°C                    |                       |            |                            |

**Load Characteristics 230 V, 60 Hz, 3 HP**

| % of Rated Load | 25   | 50   | 75   | 100  | 125  | 150  | S.F. |
|-----------------|------|------|------|------|------|------|------|
| Power Factor    | 76   | 87   | 92   | 92   | 93   | 92   | 93   |
| Efficiency      | 72   | 80   | 85   | 85.5 | 82   | 78.5 | 85   |
| Speed           | 3565 | 3540 | 3510 | 3475 | 3430 | 3370 | 3455 |
| Line amperes    | 4.6  | 7.2  | 9.6  | 12.5 | 16   | 19.9 | 14.4 |


ABB Motors and Mechanical Inc.

WINDING # 35WGY870

Typical performance - not guaranteed values.

3 HP 1 PH 60 HZ 3450 RPM 230 V 3532LC

TORQUES (LB-FT): PO=11.5 PU=9.3 LR=10.5 LRA=77

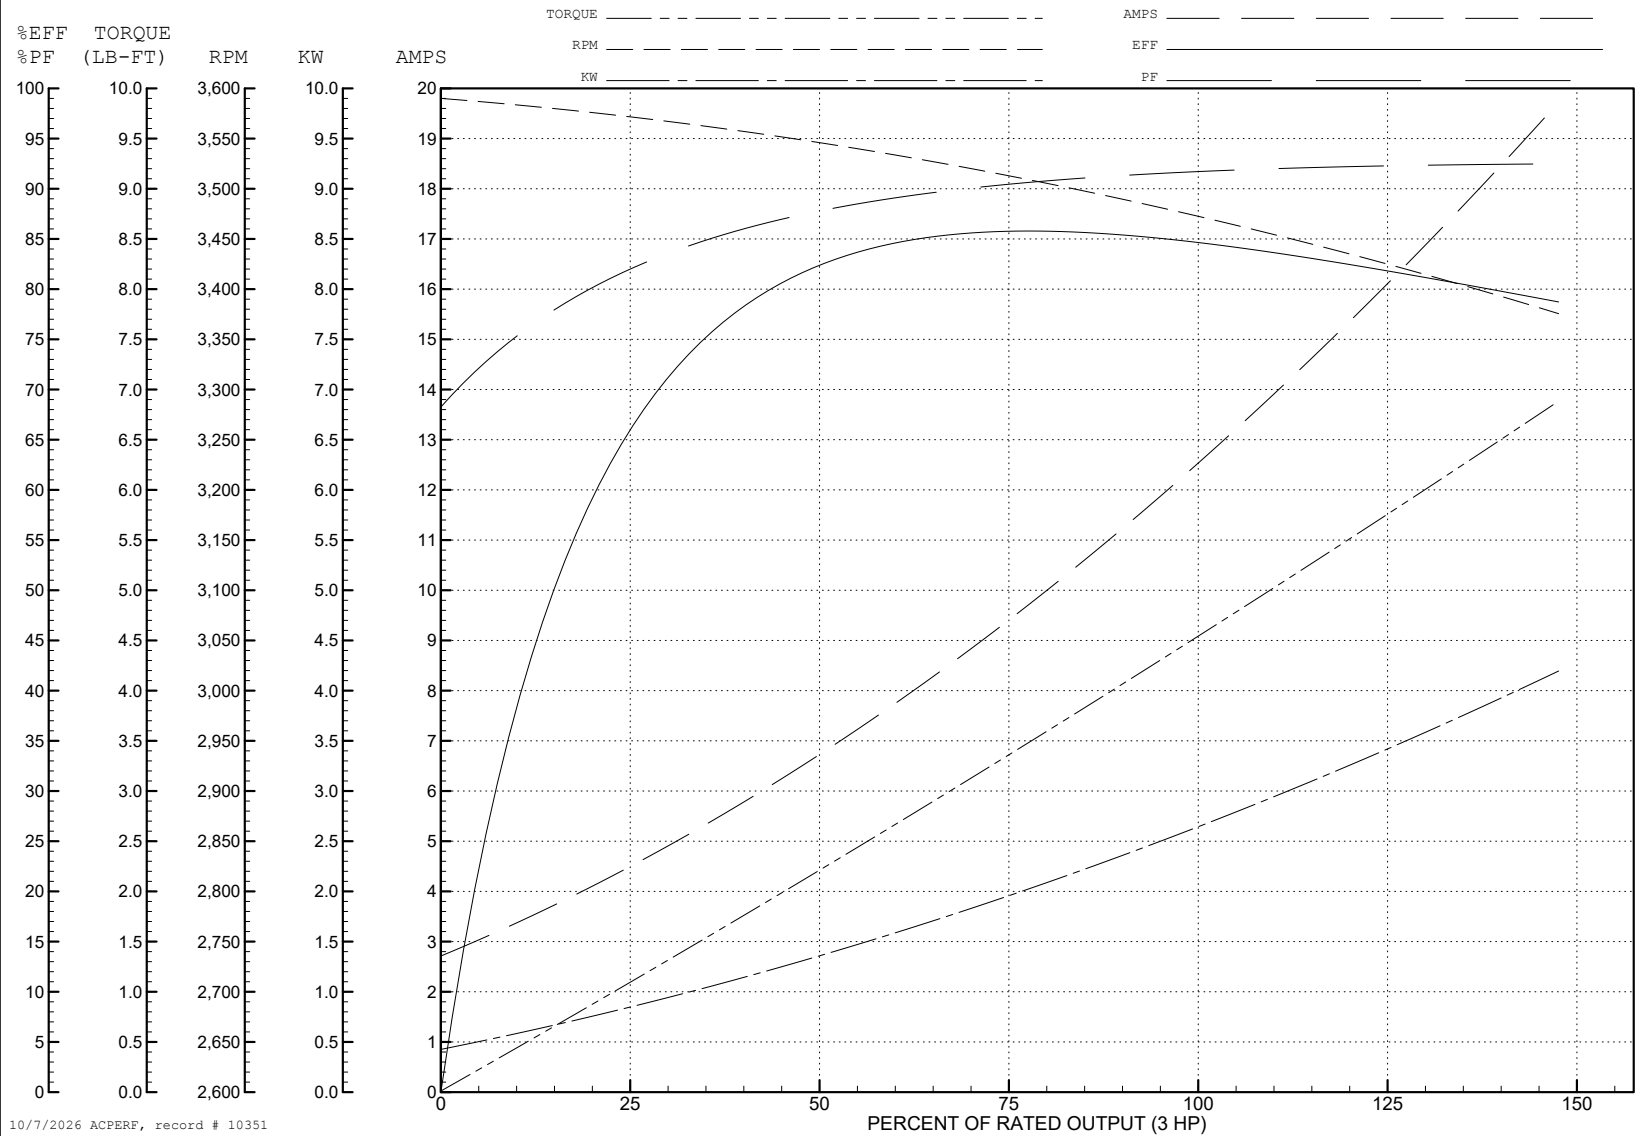

**AC Induction Motor Performance Data**

Record # 38571

Typical performance - not guaranteed values

| Winding: 35WGY870-R001 |    |              | Type: 3532LC                          |                         | Enclosure: TEFC       |            |                                 |
|------------------------|----|--------------|---------------------------------------|-------------------------|-----------------------|------------|---------------------------------|
| Nameplate Data         |    |              | 230 V, 60 Hz:<br>Single Voltage Motor |                         |                       |            |                                 |
| Rated Output (HP)      |    | 3            | Full Load Torque                      |                         | 4.65 LB-FT            |            |                                 |
| Volts                  |    | 230          | Start Configuration                   |                         | direct on line        |            |                                 |
| Full Load Amps         |    | 12.5         | Breakdown Torque                      |                         | 10.4 LB-FT            |            |                                 |
| R.P.M.                 |    | 3450         | Pull-up Torque                        |                         | 8.29 LB-FT            |            |                                 |
| Hz                     | 60 | Phase        | 1                                     | Locked-rotor Torque     |                       | 10.7 LB-FT |                                 |
| NEMA Design Code       |    | L            | KVA Code                              | G                       | Starting Current      |            | 79.3 A                          |
| Service Factor (S.F.)  |    | 1.15         |                                       | No-load Current         |                       | 1.97 A     |                                 |
| NEMA Nom. Eff.         |    | 85.5         | Power Factor                          | 95                      | Line-line Res. @ 25°C |            | 0.80257 Ω A Ph<br>1.4763 Ω B Ph |
| Rating - Duty          |    | 40C AMB-CONT |                                       | Temp. Rise @ Rated Load |                       | 104°C      |                                 |
| S.F. Amps              |    |              |                                       | Temp. Rise @ S.F. Load  |                       | 136°C      |                                 |

**Load Characteristics 230 V, 60 Hz, 3 HP**

| % of Rated Load | 25     | 50     | 75     | 100    | 125    | 150    | S.F. |
|-----------------|--------|--------|--------|--------|--------|--------|------|
| Power Factor    | 95     | 98     | 100    | 100    | 99     | 98     | 99   |
| Efficiency      | 66.4   | 76.2   | 79.4   | 78.2   | 74.4   | 67.8   | 75.9 |
| Speed           | 3553.8 | 3518.2 | 3479.4 | 3428.6 | 3362.2 | 3254.4 | 3389 |
| Line amperes    | 4.09   | 6.62   | 9.37   | 12.7   | 16.6   | 22.2   | 15   |


ABB Motors and Mechanical Inc.


WINDING # 35WGY870

Typical performance - not guaranteed values.


3 HP 1 PH 60 HZ 3450 RPM 230 V 3532LC

TORQUES (LB-FT): PO=10.4 PU=8.29 LR=10.7 LRA=79.3

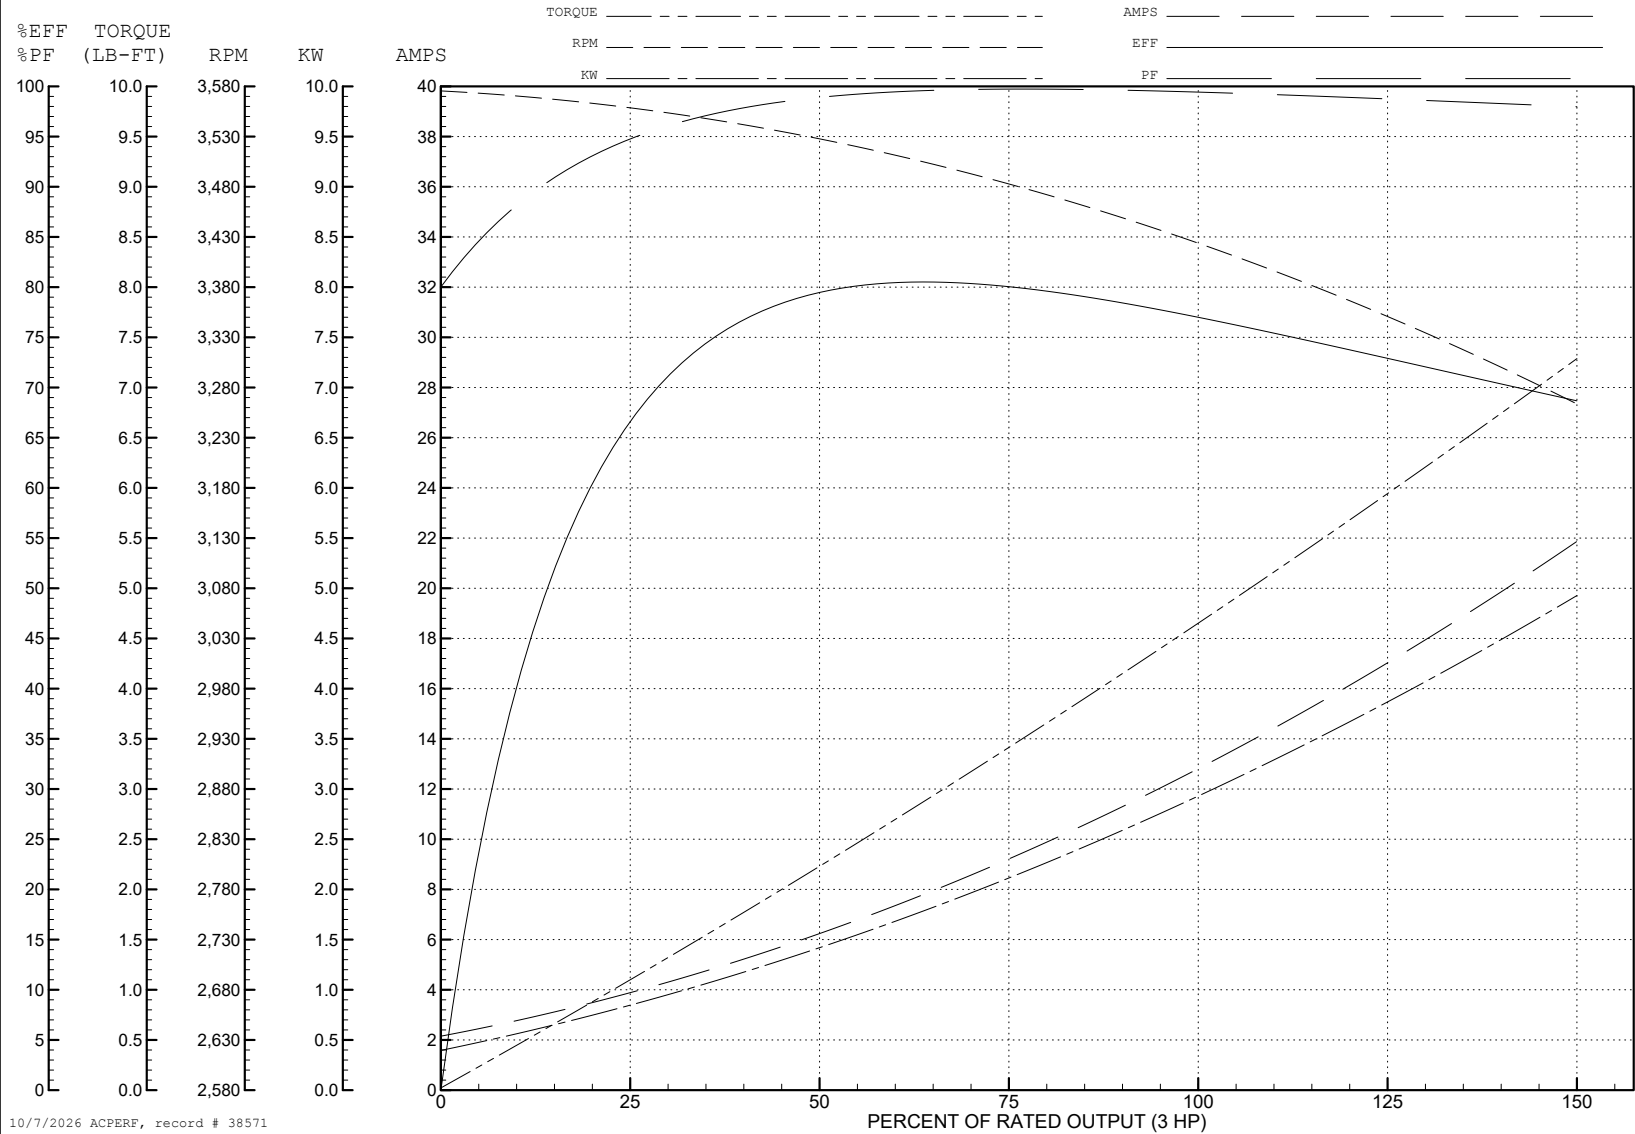



CD0002A02

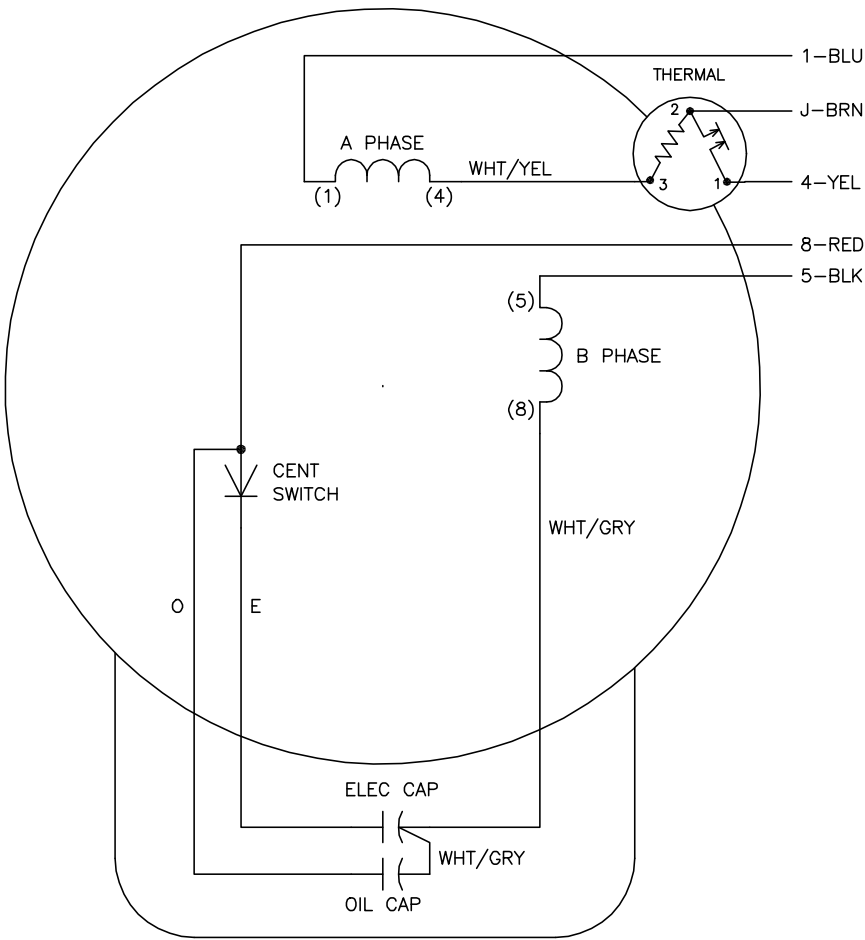

|     | LINE A | LINE B | JOIN |
|-----|--------|--------|------|
| STD | 1,8    | 4      | J,5  |
| OPP | 1,5    | 4      | J,8  |

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
  2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
  3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

|                                                            |                      |                              |
|------------------------------------------------------------|----------------------|------------------------------|
| REV. DESC: REMOVE 2-TERMINAL THERMAL DETAIL, SEE CD0002A04 |                      |                              |
| REV. LTR: D                                                | VERSION: 01          | TDR: 000000360649            |
| CD0002A02                                                  | FILE: \AAA\00007\520 | REVISED: 17:11:40 04/15/2005 |
|                                                            | MTL: -               | BY: ENJOEPO                  |

BALDOR ELECTRIC Co.

TYPE LC, SV, REV, THERMAL, 5 LEADS

CD0002A02