

AC induction motor performance data

Record #86078 - Typical performance - not guaranteed values

Winding	07WGA0018
Type	0746M
Enclosure	XPNV

Nameplate data

Rated Output	15		
Volts	230/460		
Full Load Amps	38/19		
R.P.M.	1765		
Hz	60	Phase	3
KVA Code	H		
S.F.	1.15		
NEMA Nom. Eff.	90.1	Power Factor	82
Duty	15 MIN		
S.F. Amps			

460 V, 60 Hz:

High Voltage Connection

Full Load Torque	44.66 LB-FT
Start Configuration	direct on line
Breakdown Torque	115 LB-FT
Pull-up Torque	45 LB-FT
Locked-rotor Torque	63.2 LB-FT
Starting Current	121 A
No-load Current	7.16
Line-line Res. @ 25°C	0.904 Ω
Temp. Rise @ Rated Load	35°C
Temp. Rise @ S.F. Load	43°C
Locked-rotor Power Factor	37.5
Rotor inertia	1.13 lb-ft ²

Load Characteristics 460 V, 60 Hz, 15 HP


% of Rated Load	NL	25	50	75	100	125	150	SF
Power Factor	5	47	69	78	82	84	84	83
Efficiency	0	88.9	91.4	91.9	90.9	89.9	88	90.3
Speed	1799	1792	1783	1775	1765	1754	1741	1758
Line amperes	7.16	8.37	11.13	14.65	18.74	23.33	28.59	21.5

SPEED TORQUE / SPEED CURRENT CURVES



07WGA0018

15HP 460V 60HZ

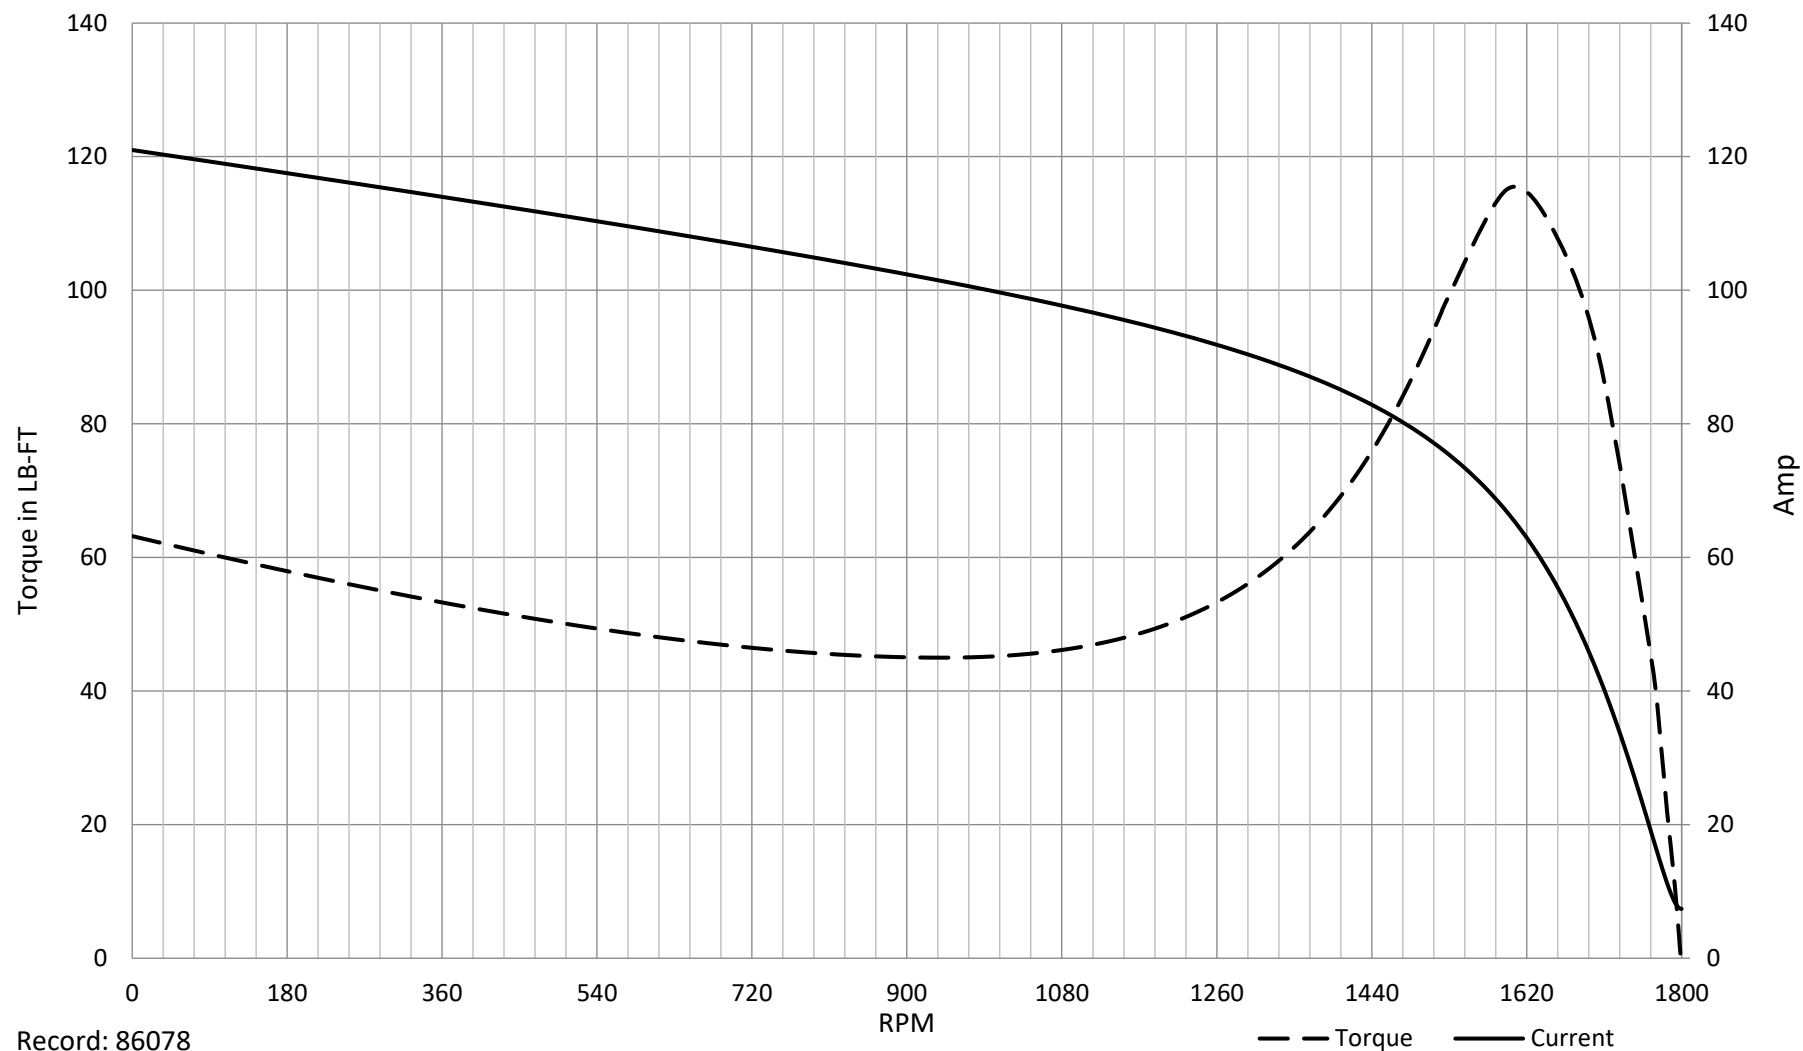

Record: 86078