

ABB BALDOR RELIANCE III

Customer information packet

VJPFPM2546T-5

60HP, 3520RPM, 3PH, 60HZ, 326JP, 4062M, 0, F1

Specifications

Enclosure	0
Frame	326JP
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	60.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CSA EEV
	UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	54.000 A @ 575.0 V
Design Code	B
Drip Cover	Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	54.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	G
Lifting Lugs	Vertical Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads


Part Detail

Revision	A
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	40WGX358
Layout	40LY-000-069
Eff. date	08-01-2023
CD Diagram	CD0382
Poles	02
Leads	6#8
Proprietary	False
Created date	02-09-2021


Motor Standards	NEMA
Motor Type	4062M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	32.21 IN
Power Factor	89
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	Included
Service Factor	1.15
Shaft Diameter	1.250 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3520 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate


NP3454L													
CAT.NO.	VJPFPM2546T-5				CUST P/N					I.P.	23		
SPEC.	40-0000-0203				SER.NO.					FRAME	326JP		
HZ	60	HP	60	RPM	3520	HZ		HP		RPM			
VOLTS	575	CODE	G	VOLTS		CODE							
AMPS	54	DES	B	AMPS		DES							
EFF	93	SER.F.	1.15	PF	89	EFF		SER.F.		PF			
RATING	40C AMB-CONT				DE BRG	6312				GREASE	POLYREX EM		
BLANK					ODE BRG	6309				MTR. WT.	431		
		CLASS	F	PH	3								
		ENCL	0	CC	010A								
HTR-VOLTS		HTR-AMPS		HTR-WATTS									

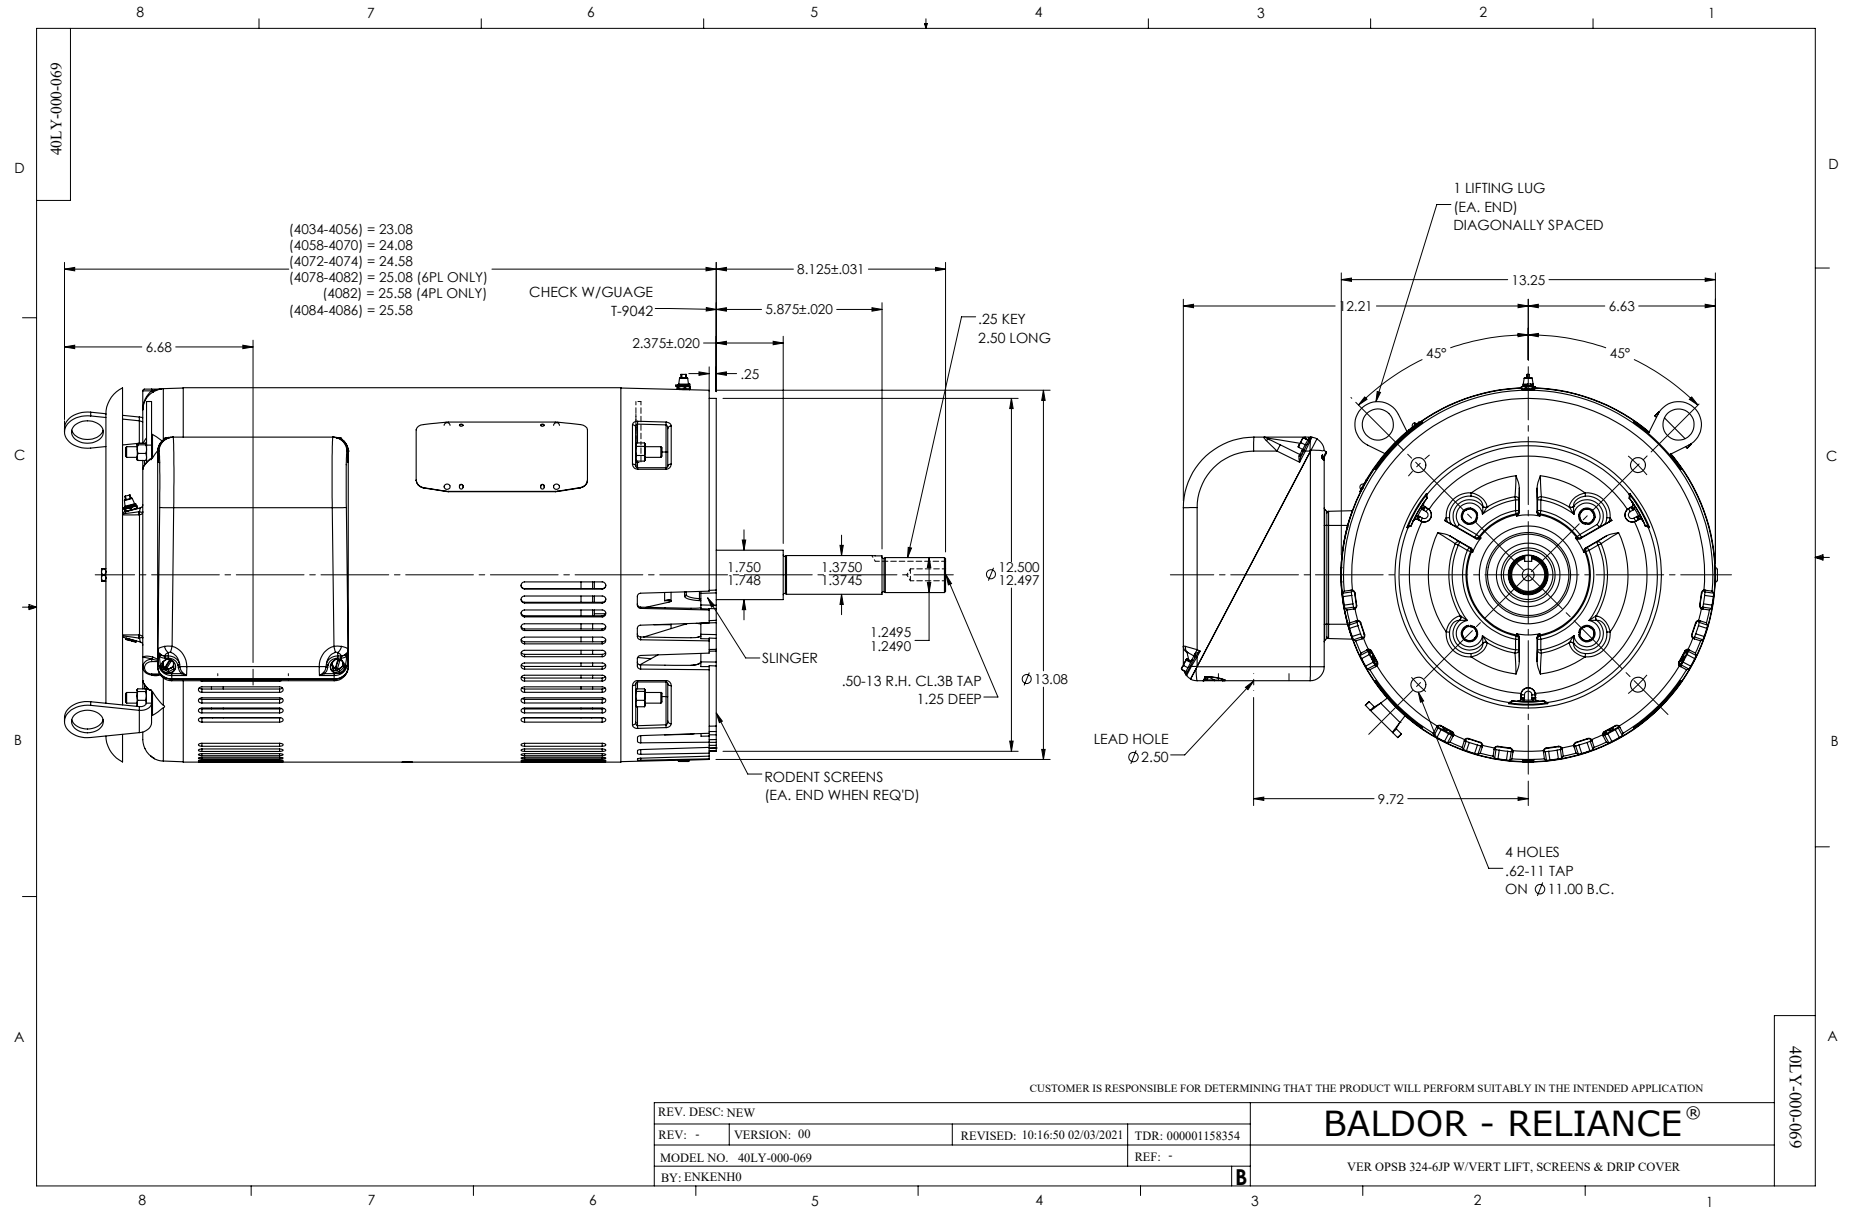


CD0382

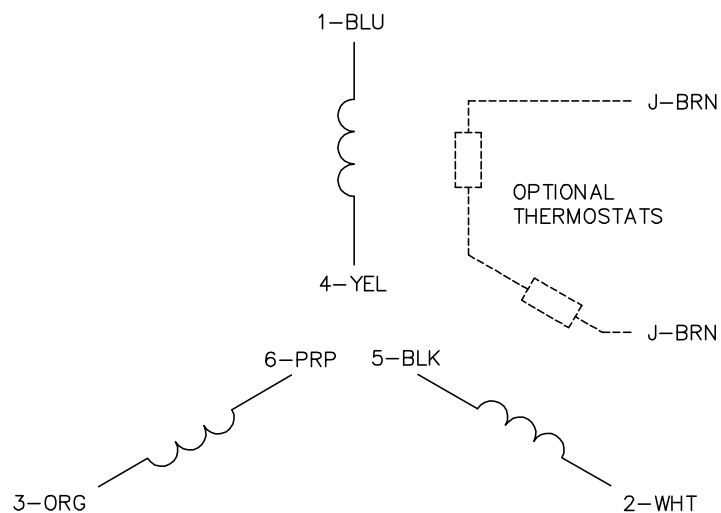

**RUN CONNECTION
(1D)**



**START CONNECTION
(1Y)**



NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.
5. FOR ACROSS-THE-LINE STARTING, USE 'RUN' CONNECTION.

REV. DESC: ADD CLASS CONN00000007

REV. LTR: F

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\243

REVISED: 09:05:32 02/19/2019

BY: ENBRIRO

MTL: -



BALDOR - RELIANCE®

3PH, SV, 6 LEADS, Y START/D RUN

SH 1 of 1

CD0382