

ABB BALDOR RELIANCE III

Customer information packet

VXT3152T-5

15HP, 3525RPM, 3PH, 60HZ, 254TC, 0934M, TEFC, F

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	254TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	UR NEMA_PREMIUM NEMA PREMIUM CSA EEV CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	13.700 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater

Part Detail

Revision	F
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	09WGT162
Layout	09LY-001-011
Eff. date	11-27-2024
CD Diagram	CD0006
Poles	02
Leads	3#12
Proprietary	False
Created date	06-01-2021

High Voltage Full Load Amps	13.7 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0934M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	23.86 IN
Power Factor	88
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3525 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4224L											
CAT.NO.	VXT3152T-5						I.P.	54			
SPEC.	09-0000-3210						ENCL	TEFC			
FRAME	254TC	H.P.		15		T. CODE		T3C			
VOLTS	575			P.F.		88					
F.L. AMPS	13.7			RATING		40C AMB-CONT					
R.P.M.	3525										
HZ.	60	PH.		3		CLASS		F			
SER.F.	1.15		DES.		B		SL HZ		1.3		
NEMA NOM. EFF.	91		WK2		0.868						
DE	6309		ODE		6208						
MAG. CUR.	4.2										
INV TYPE	PWM	CHP	60		TO		90		INV TEMP CODE		T3C
CT	6	TO	60		VT		6	TO		60	
CC	010A		SN								

AC Induction Motor Performance Data

Record # 88556

Typical performance - not guaranteed values

Winding: 09WGT162-R001			Type: 0934M	Enclosure: TEFC	
Nameplate Data			575 V, 60 Hz: Single Voltage Motor		
Rated Output (HP)		15	Full Load Torque		22.53 LB-FT
Volts		575	Start Configuration		direct on line
Full Load Amps		13.7	Breakdown Torque		88.5 LB-FT
R.P.M.		3525	Pull-up Torque		23 LB-FT
Hz	60	Phase	3	Locked-rotor Torque	29.5 LB-FT
NEMA Design Code	B	KVA Code	G	Starting Current	89.5 A
Service Factor (S.F.)			1.15	No-load Current	3.9 A
NEMA Nom. Eff.	91	Power Factor	88	Line-line Res. @ 25°C	1.0344 Ω
Rating - Duty			40C AMB-CONT	Temp. Rise @ Rated Load	48°C
S.F. Amps				Temp. Rise @ S.F. Load	59°C
				Locked-rotor Power Factor	28.3

Load Characteristics 575 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	63	81	88	90	90	90	90
Efficiency	86.9	91.1	91.7	91.1	90.1	88.8	90.5
Speed	3579.9	3561.8	3543	3520.8	3497.8	3471.7	3507
Line amperes	5.2	7.62	10.5	13.8	17.3	21.2	15.9


ABB Motors and Mechanical Inc.


WINDING # 09WGT162

Typical performance - not guaranteed values.




15 HP 3 PH 60 HZ 3525 RPM 575 V 0934M

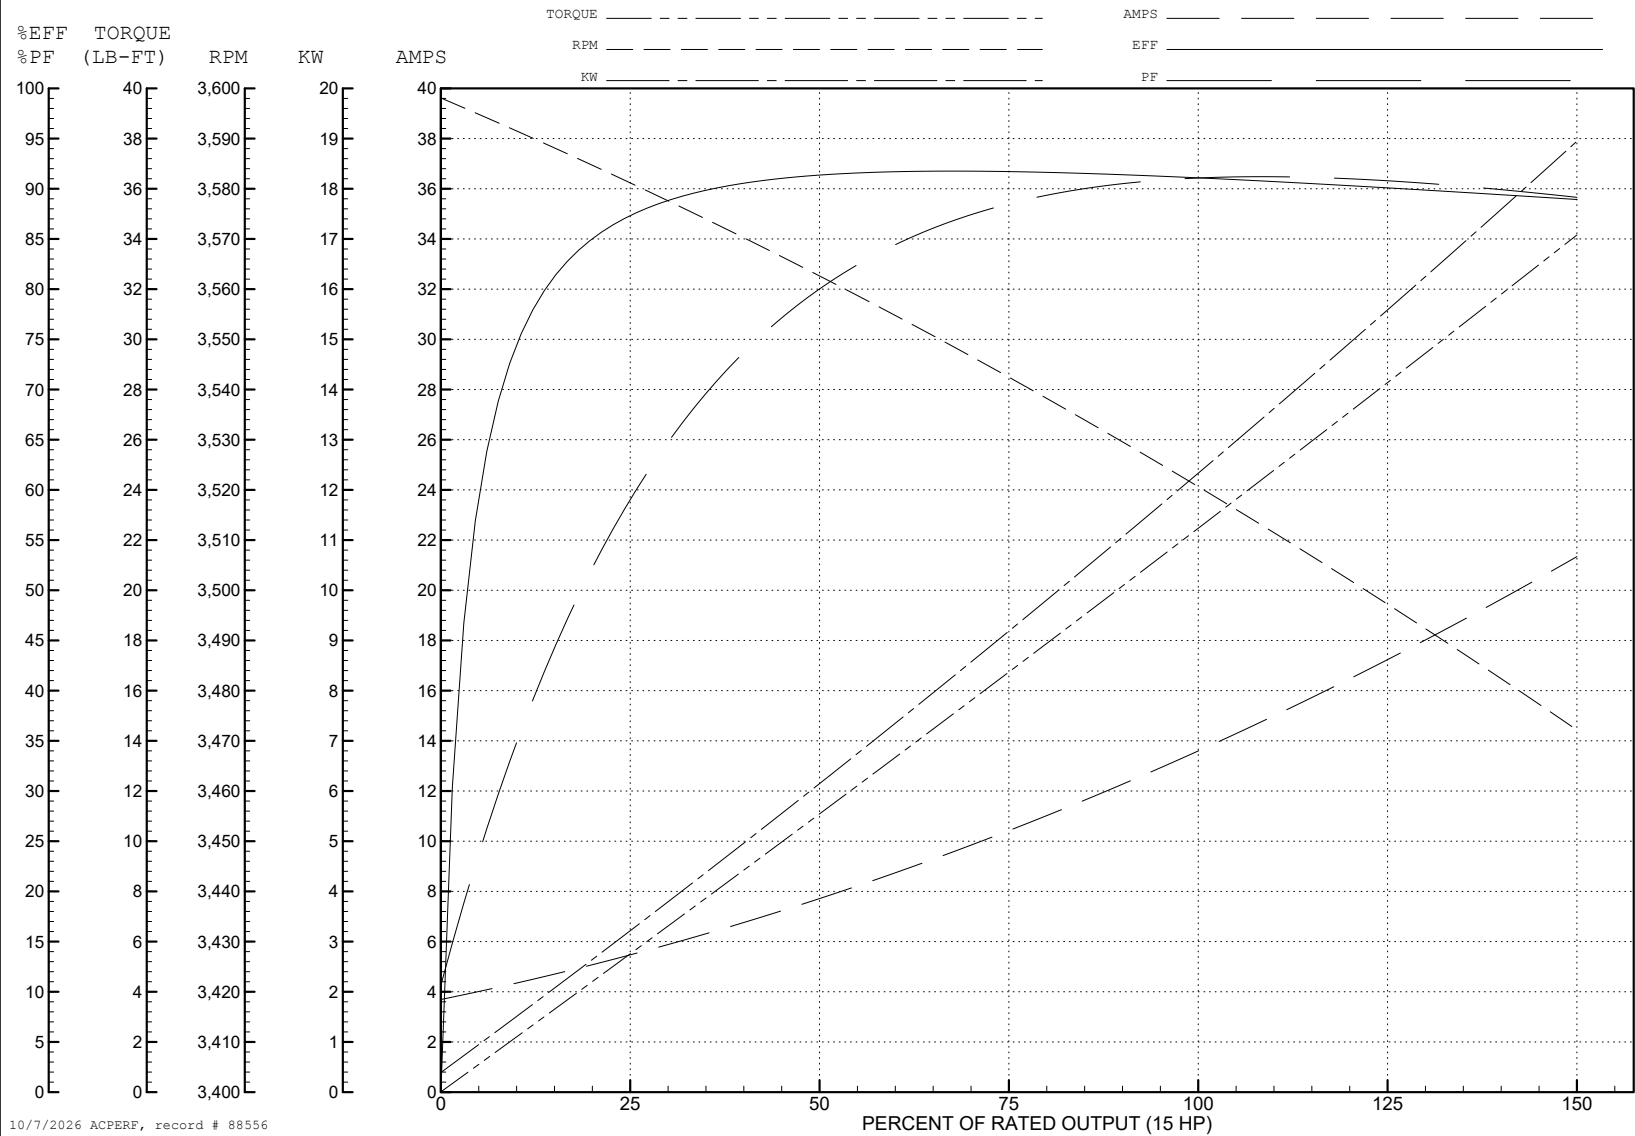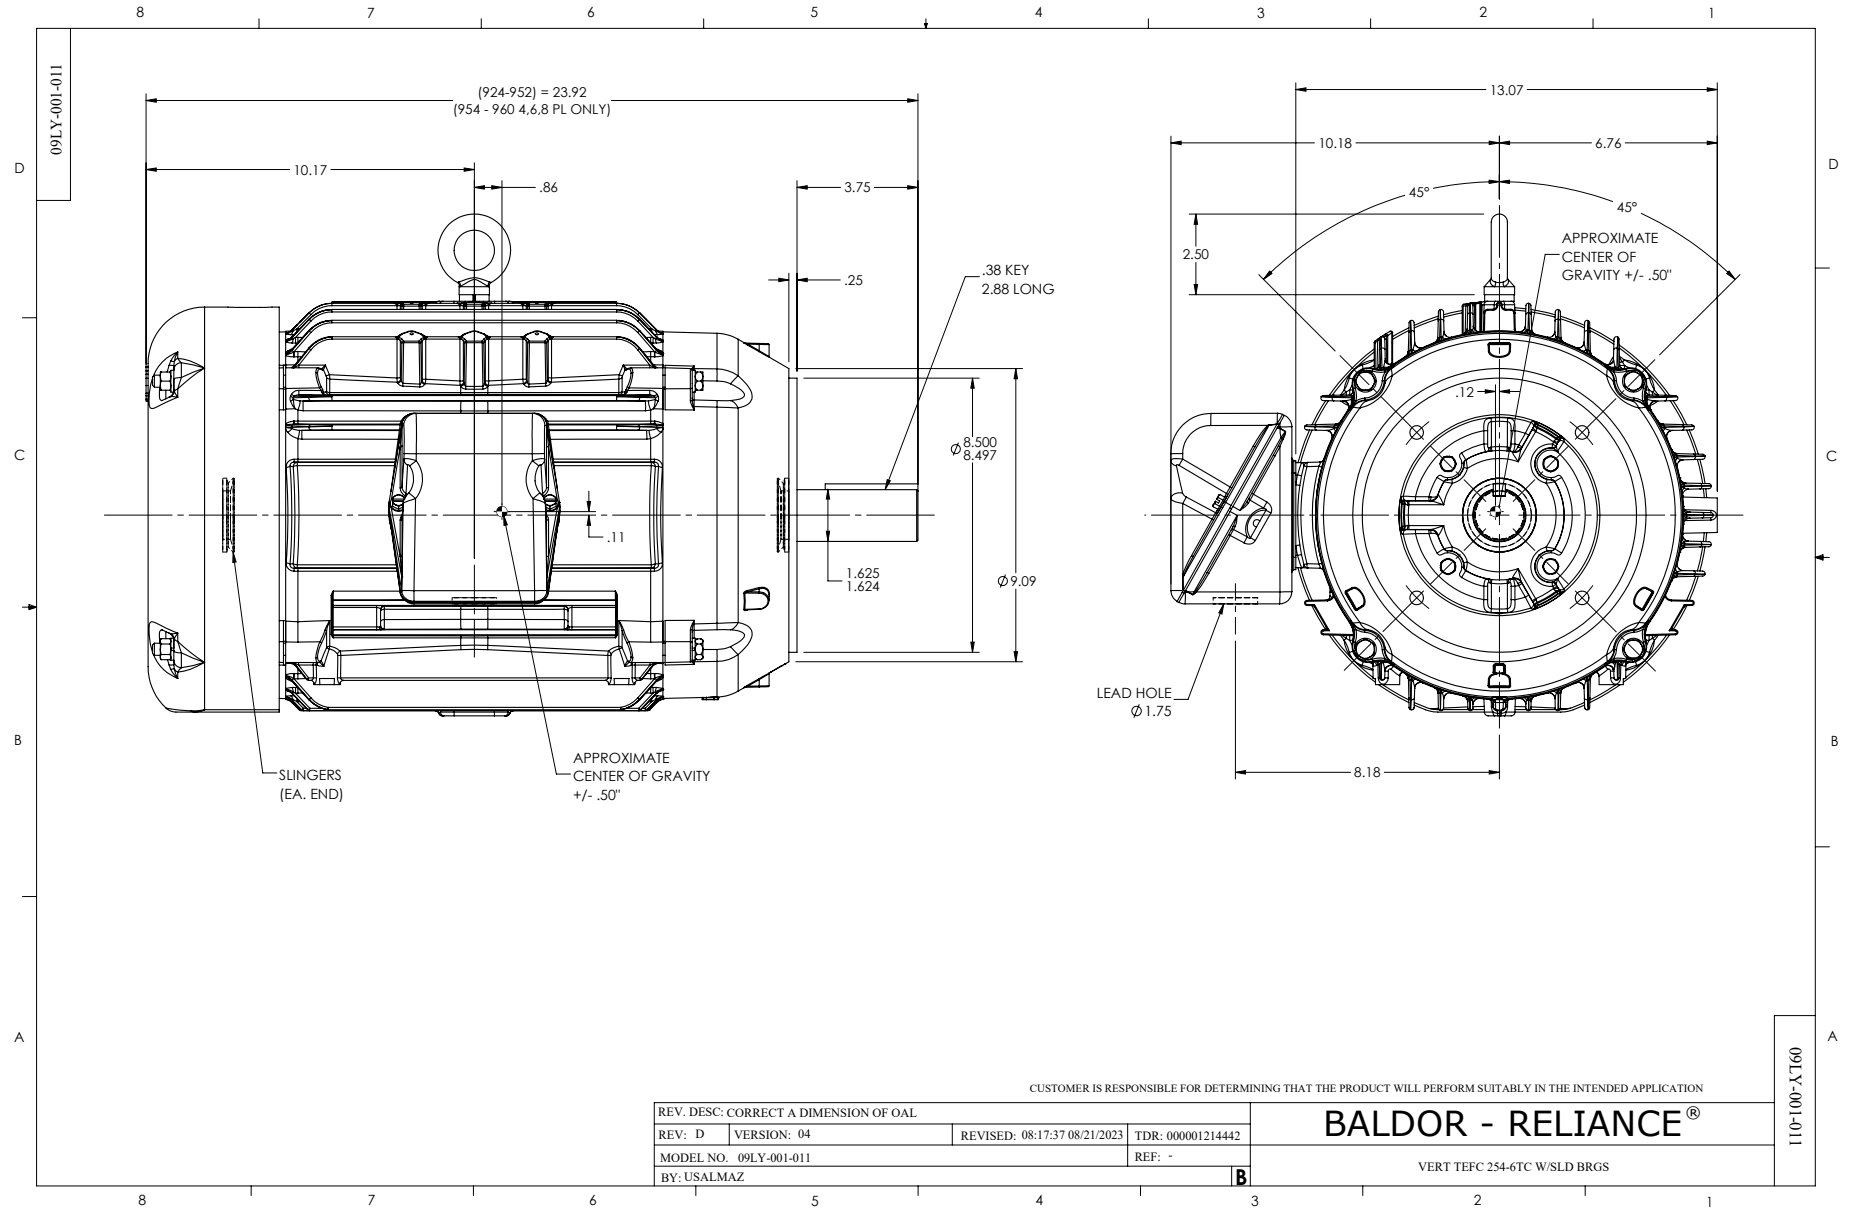TORQUES (LB-FT): PO=88.5 PU=23 LR=29.5 LRA=89.5





CD0006

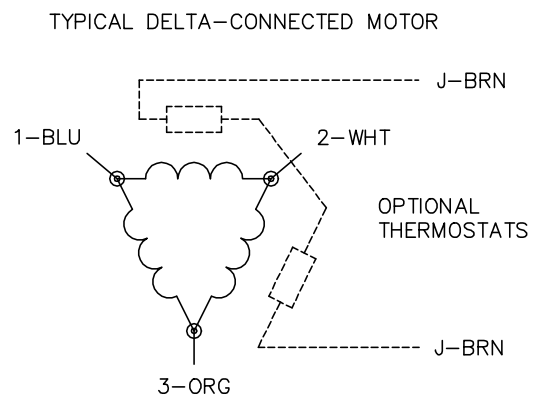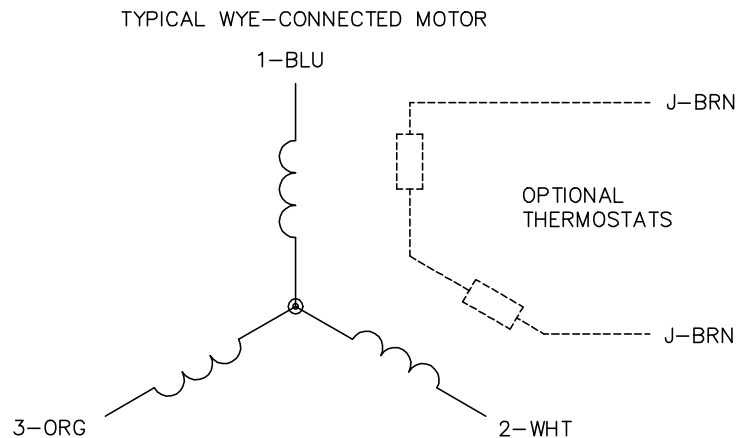
NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10: 24: 49 02/19/2019

BY: ENBRIRO

MTL: —


BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1