

ABB BALDOR RELIANCE III

Customer information packet

XL05142A

1HP, 1730RPM, 1PH, 60HZ, 56, 3524L, XPFC, F1, N

Class - CLI GP D; CLII GP F,G

Division - Division I

Specifications

Enclosure	XPFC
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP D; CLII GP F,G
Haz Area Division	Division I
Motor Letter Type	Cap Start, Induction Run
Output @ Frequency	1.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	UL CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	12.400 A @ 115.0 V 6.200 A @ 230.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	67.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	6.2 a

Part Detail

Revision	B
Type	AC
Mech. spec.	35E353
Base	
Status	PRD/A
Elec. spec.	35WGF092
Layout	35LYE353
Eff. date	08-20-2026
CD Diagram	CD0008
Poles	04
Leads	3#16 A PH,3#18 B&J,1#14 #4TH Y
Proprietary	False
Created date	11-14-2024

Insulation Class	B
Inverter Code	Not Inverter
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 16 AWG, A PH
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	X3524L
Mounting Arrangement	F1
Number of Poles	4
Overall Length	15.15 IN
Power Factor	77
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1730 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Do Not Use Eve-Not Valid
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	EP
Winding Thermal 2	None

Nameplate

NP0016XPSL									
NO.		CC							
SER. #									
SPEC	35E353F092								
CAT.NO.	XL05142A								
H.P.	1	T. CODE	T3C						
VOLTS	115/230								
AMPS	12.4/6.2								
R.P.M.	1730								
HZ	60	PH	1	CLASS	B				
SER.F.	1.00	DES	L	CODE	L				
RATING	40C AMB-CONT								
FRAME	56	NEMA NOM. EFF	67						
	PF	77							
BLANK	NEMA MG-1 PART 5, IP54								

AC Induction Motor Performance Data

Record # 20952

Typical performance - not guaranteed values

Winding: 35WG0766-R002			Type: 3520L		Enclosure: XPFC	
Nameplate Data			230 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		.33	Full Load Torque		1.5 LB-FT	
Volts		115/230	Start Configuration		direct on line	
Full Load Amps		6.8/3.4	Breakdown Torque		3.5 LB-FT	
R.P.M.		1140	Pull-up Torque		3.3 LB-FT	
Hz	60 Phase	1	Locked-rotor Torque		4.8 LB-FT	
NEMA Design Code		N	KVA Code		K	
Service Factor (S.F.)		1	No-load Current		3 A	
NEMA Nom. Eff.		54	Power Factor		56	
Rating - Duty		40C AMB-CONT	Line-line Res. @ 25°C		7.76 Ω A Ph 4.23 Ω B Ph	
			Temp. Rise @ Rated Load		72°C	

Load Characteristics 230 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	33	42	50	58	64	70
Efficiency	26.8	41.5	50.1	55.2	57.8	58.7
Speed	1188	1179	1170	1160	1148	1133
Line amperes	3.05	3.1	3.2	3.35	3.6	3.9


ABB Motors and Mechanical Inc.


WINDING # 35WG0766

Typical performance - not guaranteed values.


0.33 HP 1 PH 60 HZ 1140 RPM 230 V 3520L

TORQUES (LB-FT): PO=3.5 PU=3.3 LR=4.8 LRA=13

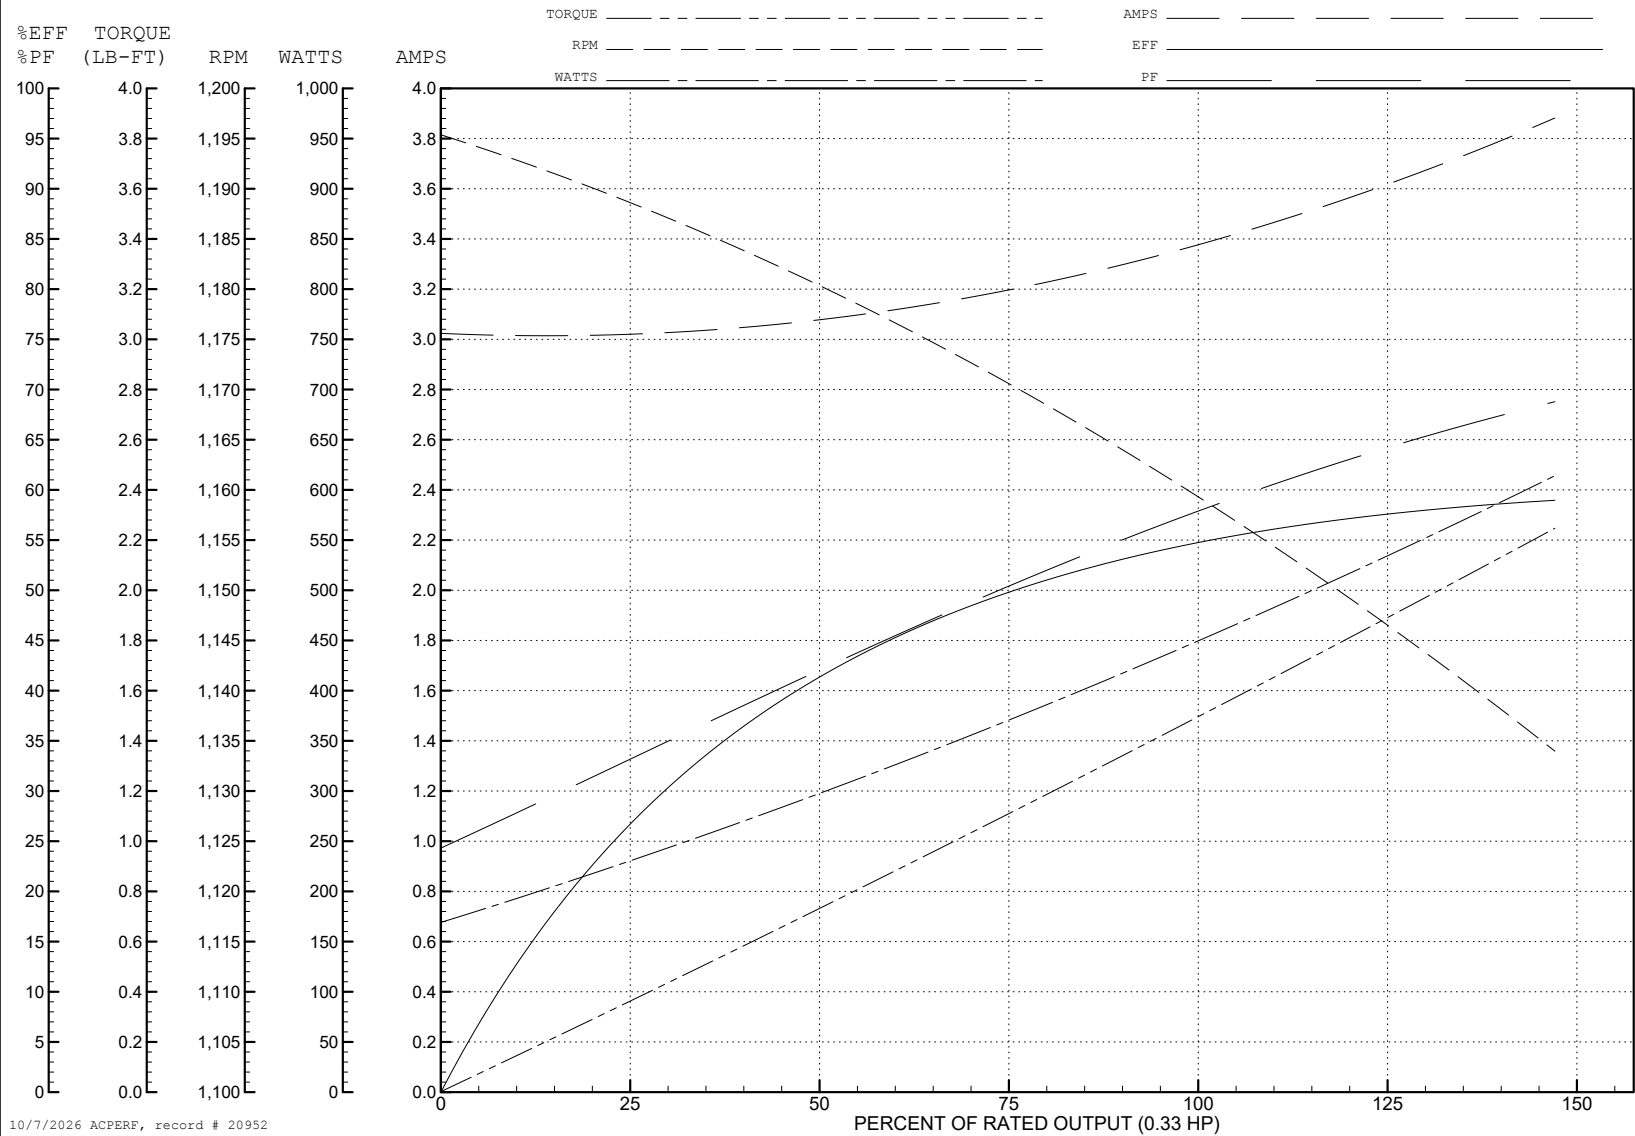

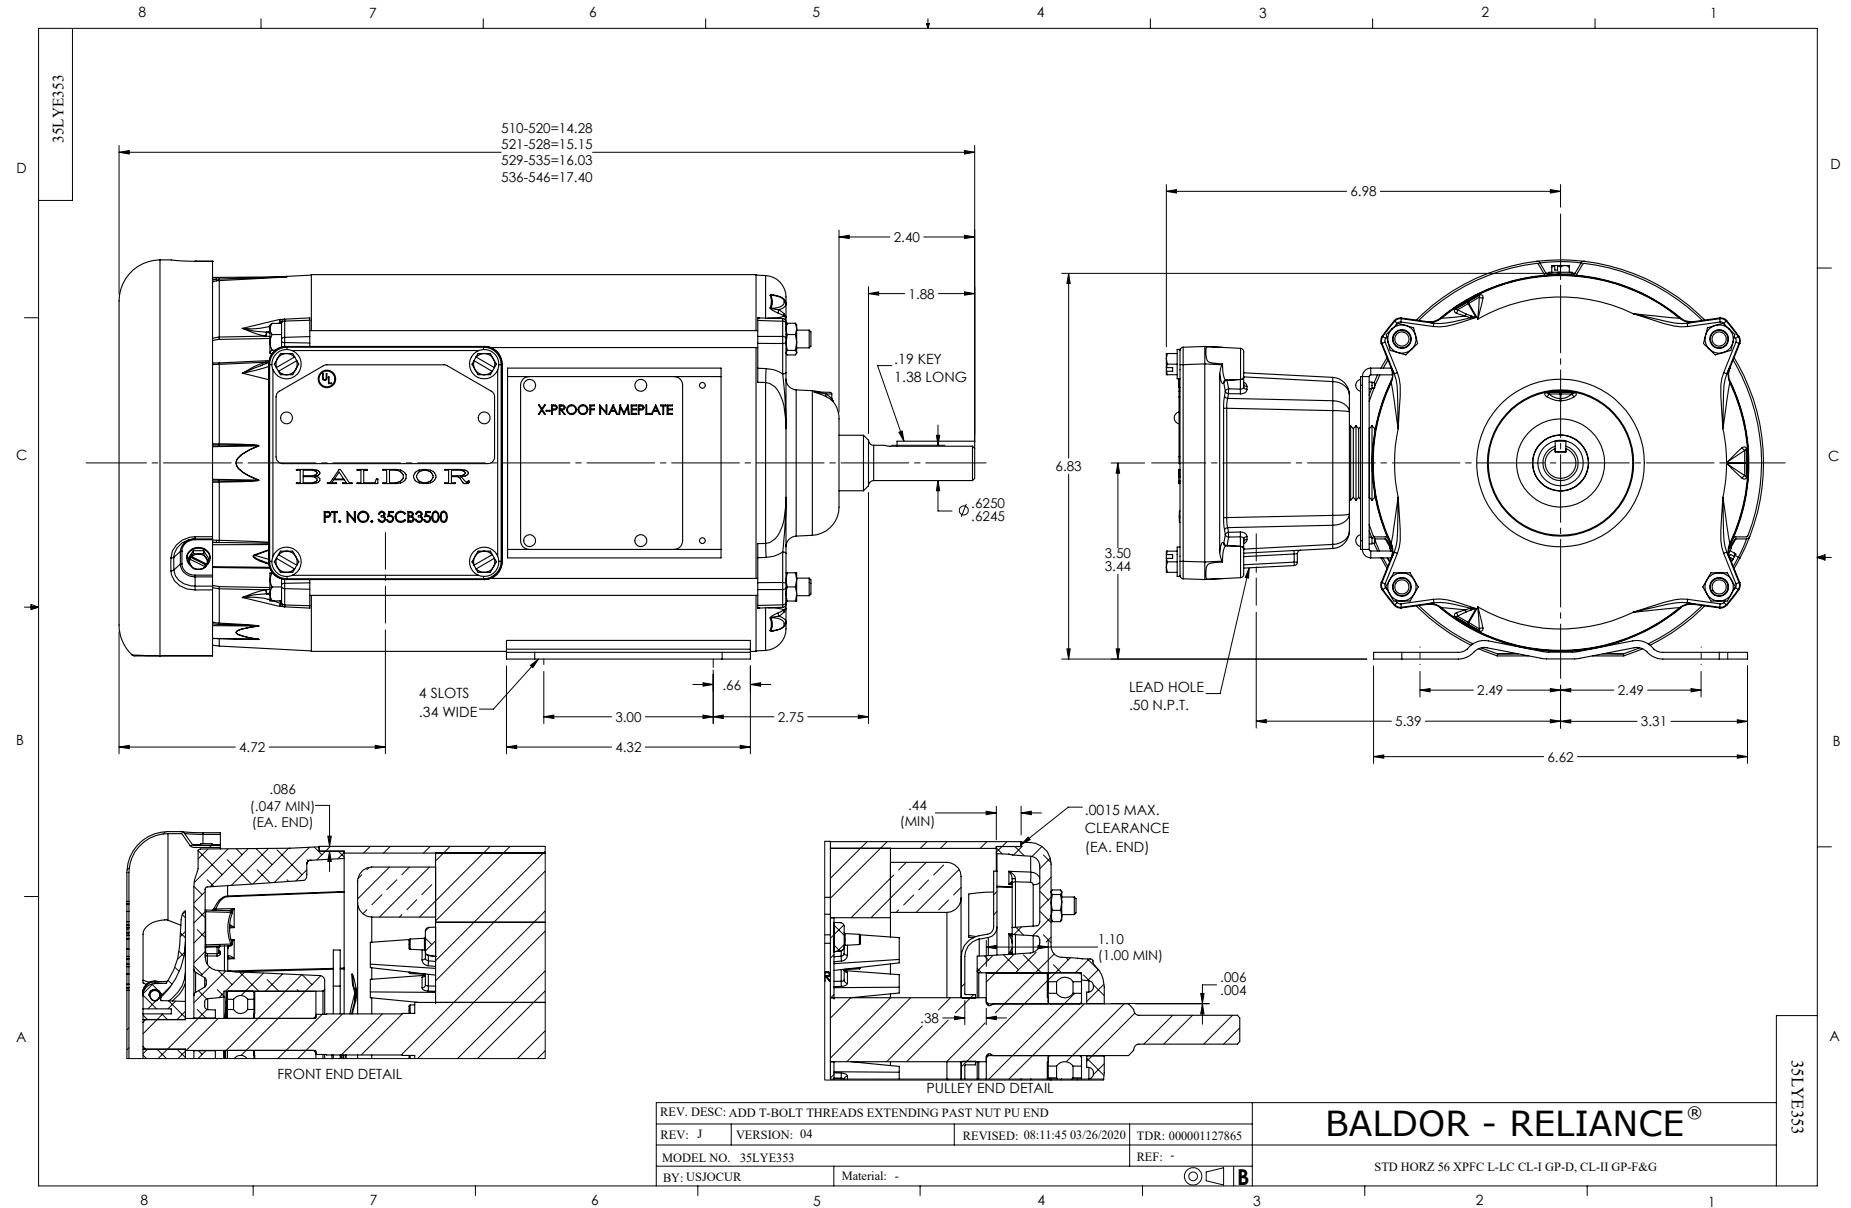

CD0008

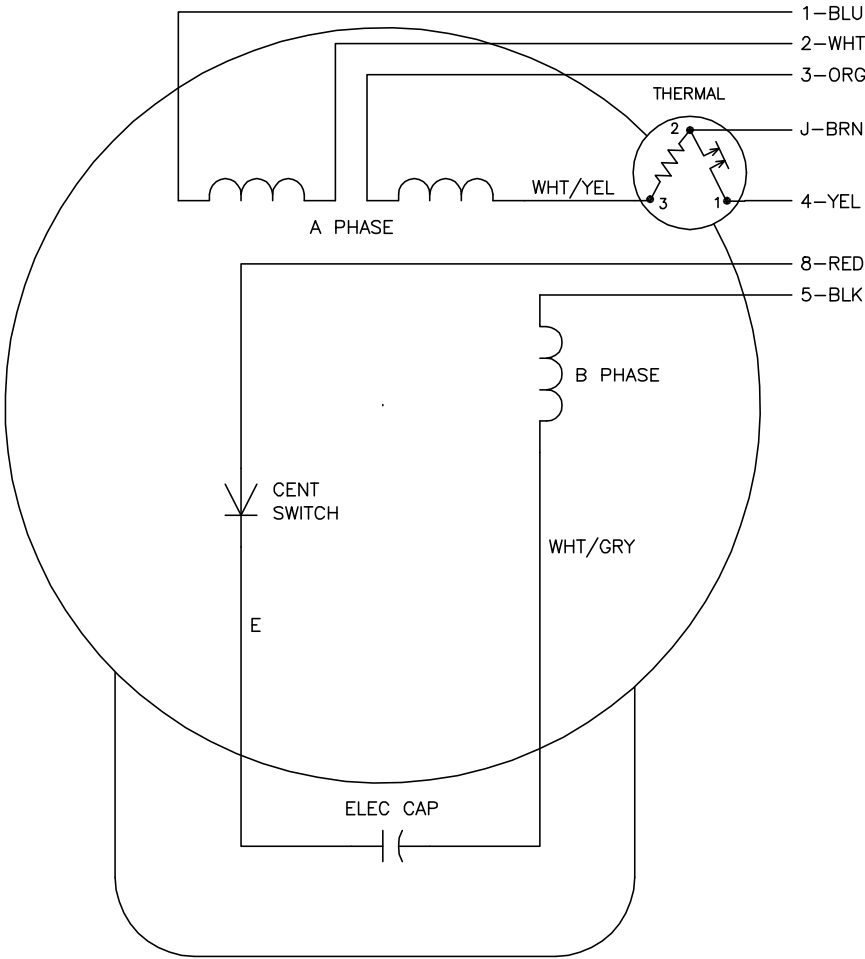

	LINE A	LINE B	JOIN	JOIN
HIGH STD	1	4	2,3,8	J,5
HIGH OPP	1	4	2,3,5	J,8
LOW STD	1,3,8	4	—	2,J,5
LOW OPP	1,3,5	4	—	2,J,8

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REMOVE 2-TERMINAL THERMAL DETAIL, SEE CD0008A02		
REV. LTR: F	VERSION: 01	TDR: 000000360649
800000	FILE: \AAA\00007\408	REVISED: 10:56:54 04/18/2005
	MTL: —	BY: ENJOEPO

BALDOR ELECTRIC Co.

TYPE L, DV, REV, THERMAL, 7 LEADS

CD0008