

Gauge Adaptor Assembly, 4-way Manifolds

ENERPAC 

▼ Shown: GA45GC, AMGC42 (front and backside)



GA45GC, AMGC Series

Connection 1:
3/8" NPTF male

Connection 2:
CR400 coupler

Maximum Operating Pressure:
700 bar



4-Way Manifold assembly complete with gauges


Offering ease of portability and convenience with an ergonomic robust design, ready for use.

GA45GC, Gauge Adaptor Assembly

- 45° angled gauge improves reading
- Slim design
- Easy to fit in a broad range of systems
- Maximize controlled load movement
- Glycerine-dampened gauge with dual scale
- Enerpac High-Flow female coupler CR400.

AMGC-Series, 4-Way Manifolds

- Four glycerine-dampened 700 bar gauges improve safety
- All protected by the robust protection frame
- Enerpac's CR400 female couplers on all ports allow the manifold to be quickly connected to up to 4 cylinders.

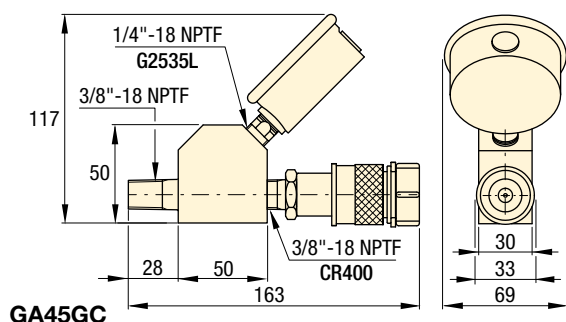


GA45GC

Model Number	Gauge Port * (1/4" NPTF)	Male End	Female End (3/8" NPTF)	 (kg)
GA45GC	G2535L	3/8"-18 NPTF	CR400	3,2

* Gauge Range: 0-700 bar, 0 - 10,000 psi.



▲ The Gauge Adaptor Assembly is the window to your system; allows easy reading of the pressure for safe operation.

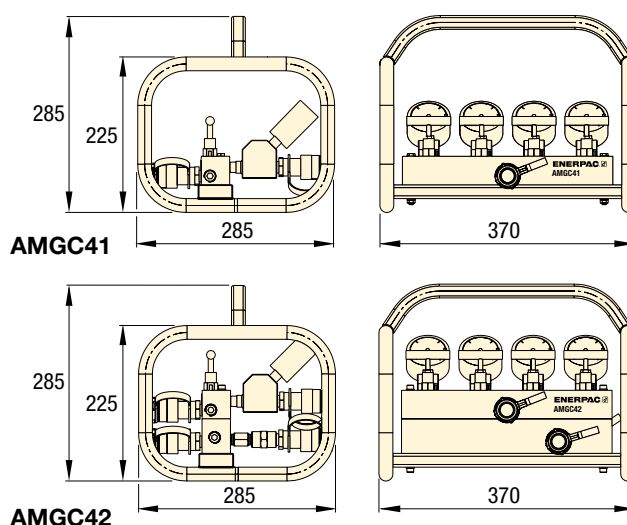

AMGC42

Model Number	Manifold Type * (cylinders used)	Advance		Retract		Gauge **	 (kg)
		Inlet	Outlet	Inlet	Outlet		
AMGC41	4x S/A	1	4	—	—	4x G2535L	10,8
AMGC42	4x D/A	1	4	4	4	4x G2535L	17,4

* S/A: single-acting; D/A: double-acting.

** Gauge Range: 0-700 bar, 0 - 10,000 psi.