


Ultra-High-Pressure Air Pump

▼ ATP1500

Ex II 2 GD ck T4



- General purpose, high-pressure air driven two-speed pump unit for products requiring up to 1500 bar hydraulic pressure
- Compact, lightweight, rugged steel frame for protection and easy handling
- Prelubricated pump element, does not require an airline lubricator
- Easily adjustable output pressure control
- Integrated and protected easy-to-read glycerine-filled gauge
- Safety relief valve limits output pressure.

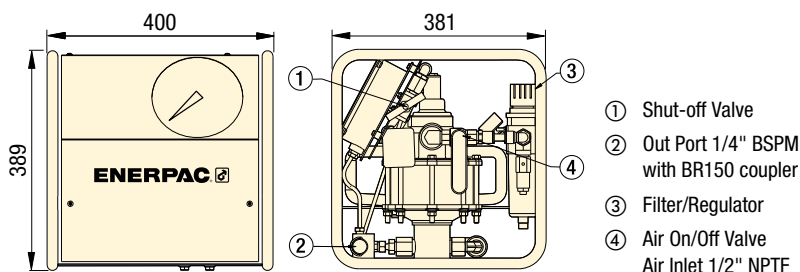

1500 BAR HIGH-PRESSURE AIR PUMP

Pump Type	Useable Oil Capacity (litres)	Pressure Rating (bar)	Model Number	Output Flow Rate at 0 bar (l/min)	Output Flow Rate at 1500 bar (l/min)	Air Pressure Range (bar)	Air Consumption (l/min)	Sound Level (dBA)	 (kg)
Two-speed	3,8	1500	ATP1500	0,43	0,07	5,5 - 6,2	594	70	32

ATP Series

Reservoir Capacity:

3,8 litres

Flow at Rated Pressure:

0,07 l/min

Maximum Operating Pressure:

1500 bar



Ultra-high-pressure

This pump operates at ultra-high pressure, use only the specified fittings and hoses designed for these pressures.

Page: 307



Applications

The ATP-pump is ideally suited for use with hydraulic bolt tensioning tools and hydraulic nuts.



ATEX Certified

The ATP-Pump is tested and certified according ATEX.

Ex II 2 GD ck T4

Page: 399

OIL FLOW VERSUS PRESSURE

Flow (l/min) at 6,2 bar air input

