

▼ IPM3 Internal Mechanical Puller



IPM Series

Maximum Reach:

1.77 - 3.11 inches

Spread Range:



0.98 - 3.94 inches



IMPORTANT!

Always wear Safety Goggles and Gloves while using pullers.

- Remove bearings or other shaft-mounted parts where no spindle support is available
- Slide hammer allows for application of safe, high-impact force
- Jaw design provides secure grip
- Includes two sets of jaws for internal and external pulling applications.

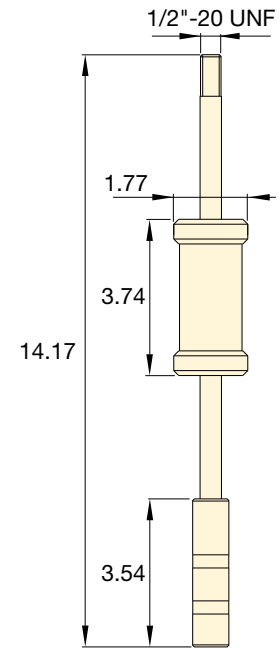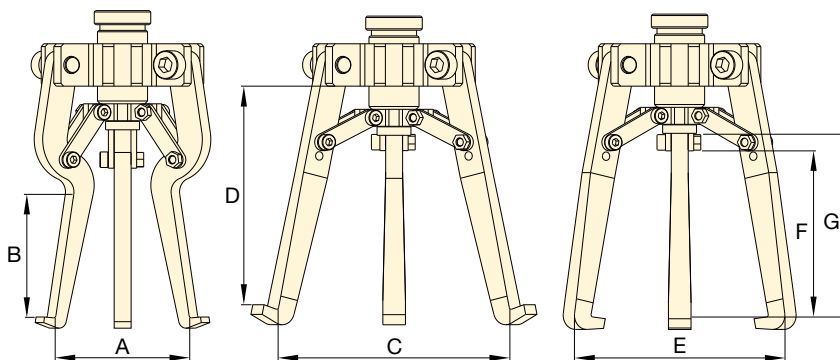

Slide Hammer Dimensions (inch)

▼ DIMENSIONAL DATA

Model Number	Internal Jaw Dimensions (in)			Standard Jaw Dimensions (in)							
	Minimum Spread Diameter	Maximum Spread Diameter	Maximum Reach	Internal Configuration			External Configuration				
				Minimum Spread Diameter	Maximum Spread Diameter	Maximum Reach	Minimum Spread Diameter	Maximum Spread Diameter	Maximum Reach		
A	A	B	C	C	D	E	E	F	G	(lbs)	
IPM3	0.98	2.36	1.77	2.36	3.94	3.11	0.59	2.95	2.16	7.75	4.60