

▼ LGH3100B



The safe and productive way to remove large, shaft mounted components without damage

- Synchronous grip jaw movement for easy alignment of the three jaws while setting it on the workpiece to be removed
- Lock-on jaws offer a secure grip
- Hydraulically applied pulling force increases pulling capacity, improves control of pulling process while reducing operator fatigue
- No need to cut, heat or torch components for removal, resulting in safer work-environment and preventing damage to equipment
- Ergonomic rolling cart with large industrial castor wheels
- Smooth action scissor lift: hydraulically actuated lift cylinder on cart extends puller from center height between 27.5 - 66.1 inches
- Mounted on a stable cart/trolley with a wide base. Includes pockets to provide the option of using a forklift
- Includes ZE3-Series electric two-stage pump with remote pendant for fingertip control of the removal process.



Pushing Adaptors

The LGH3100 Lock-Grip Puller includes 2 pushing adaptors.

Length (in)	Diameter (in)	Model Number
9.84	3.54	LGH100K6
17.72	3.54	LGH100K7



Built-in Gauge

The LGH3100 Lock-Grip Puller's control panel includes a pressure gauge as standard equipment



◀ LGH3100 used to remove rail wheel from axle.

100 tons Hydraulic Lock-Grip Puller



LGH3100, 100 tons Lock-Grip Puller

The LGH3100 is an ideal solution for pulling medium to large size wheels, sprockets, bearings and other similar shaft-mounted parts.

The puller's self-centering closing "Lock-Grip" system allows all jaws to move simultaneously, making it easy for the operator to mount the puller and to perform the application.

LGH3100 is a 3 jaw design which can be converted into a 2 jaw puller for use when clearance is limited.

NOTE: the 2 jaw configuration has a capacity of 70 tons.



IMPORTANT!

Always wear safety goggles and gloves while using pullers.

LGH Series



Capacity:

100 tons

Maximum Reach:


48 inches

Spread Range:

28.7 - 78.1 inches

Maximum Operating Pressure:

10,000 psi

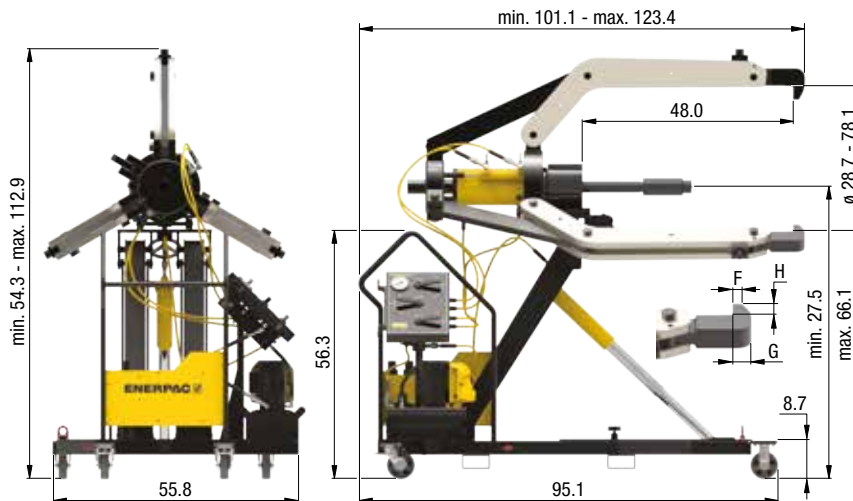


Point Protectors

The pushing cylinder rod needs to use a point protector. If the shaft end does not have a drilled center hole use the point protector with the tip **LGH100K4**.

If the shaft end does not have a drilled center hole use the flat point protector **LGH100K5**.

One of these two protectors has to be used on the cylinder push rod.

Model No.	Description
LGH100K4	Point Protector Kit
LGH100K5	Point Protector Flat Kit

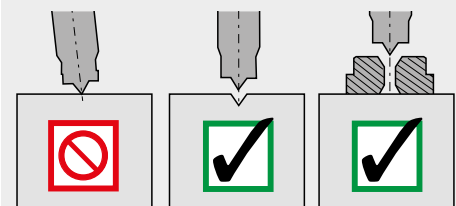

Number of Jaws *	Maximum Reach (in)	Spread Range (in)	Capacity (tons)	Model Number	Electric Pump (V - ph - Hz)	Cylinder Stroke (in)	Jaw Width F (in)	Tip Clearance G (in)	Tip Depth H (in)	(lbs)
3	48	28.74 - 78.15	100	LGH3100E	230 - 1 - 50	10.12	1.20	2.68	3.07	2998
3	48	28.74 - 78.15	100	LGH3100B	115 - 1 - 60	10.12	1.20	2.68	3.07	2998

* Can be converted into a 2 jaw puller for use when clearance is limited. The 2 jaw configuration has a capacity of 70 tons.