

▼ Shown: **LH102** and **TM5** (in middle)



TM, LH Series

Capacity:

2,000 to 200,000 lbs

Accuracy, % of full scale:

± 2%



TM and LH models are 100% tested to verify accuracy within a ± 2% range.


If your application requires a calibrated tool, it must be submitted for certification testing. Certification is NOT available from Enerpac.

Tension Meter TM5


- Accuracy ± 2% of full scale
- Zinc and bronze plated to resist corrosion
- Dual-range readout in pounds and kilograms
- Maximum indicating pointer reading for pre-selected forces or to maintain force readings
- Cushioned metal case provides safe storage and transport.

Load Cells LH-Series

- Accuracy ± 2% of full scale
- Swivel loading pad reduces eccentric loading for improved accuracy
- Maximum indicating pointer reading pre-selected forces or to maintain maximum force readings
- Dual-range readout in pounds and kilograms.

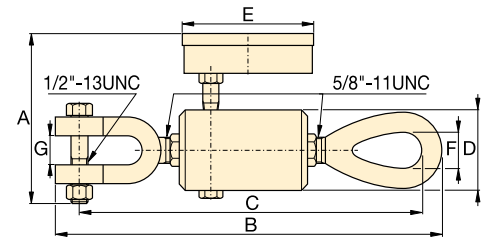

TM5

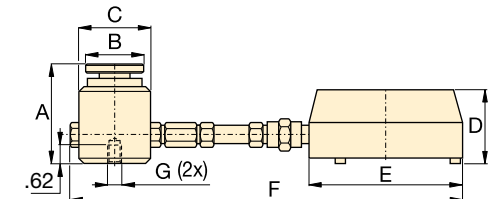

LH-Series

▼ SELECTION CHART

Type	Gauge Capacity		Model Number	Minimum Reading		Gauge Scale Increments		Dimensions (in)						
	(lbs)	(kg)		(lbs)	(kg)	(lbs)	(kg)	A	B	C	D	E	F	G *
Direct Mounted	10,000	4.500	TM5	1,000	500	100	100	4.75	9.75	9.29	2.00	4.00	0.88	0.75
Direct Mounted Load Cell	2,000	900	LH10	200	100	20	20	3.06	1.75	2.25	2.38	4.00	10.00	1/4" - 20, 1.75" BC
	10,000	4.500	LH50	1,000	500	100	100	3.06	1.75	2.25	2.38	4.00	10.00	1/4" - 20, 1.75" BC
Remote Mounted with 2 ft Hose	2,000	900	LH102	200	100	20	20	3.06	1.75	2.25	2.38	5.81	33.31	1/4" - 20, 1.75" BC
	10,000	4.500	LH502	1,000	500	100	100	3.06	1.75	2.25	2.38	5.81	33.10	1/4" - 20, 1.75" BC
	20,000	9.000	LH1002	2,000	1,000	200	200	3.06	1.75	2.25	2.38	5.81	33.10	1/4" - 20, 1.75" BC
Remote Mounted with 6 ft Hose	50,000	21.000	LH2506	5,000	3,000	500	500	4.00	2.75	3.38	2.38	5.81	82.44	3/8" - 24, 2.50" BC
	100,000	45.000	LH5006	5,000	5,000	1,000	1,000	5.22	4.00	5.00	2.38	5.81	84.06	3/8" - 24, 3.50" BC
	200,000	90.000	LH10006	10,000	10,000	2,500	1,000	6.22	5.00	6.25	2.38	5.81	85.31	3/8" - 24, 4.0" BC

* BC = Bolt Circle