

▼ Shown from left to right: P25, P51, P18



- P25 and P50 pump oil in both forward and reverse handle movement improving overall efficiency, ideal when mounting space is restricted
- External load-release valve
- Internal pressure-relief valve for overload protection
- For use with single-acting cylinders and tools
- P18 vertical operation requires pump head facing down
- P25 and P50 vertical operation requires pump vent side facing down
- P51 for horizontal operation only.

▼ P18 hand pump used for locking the rotating table for marble polishing.



When Less Than 700 bar is All You Need



GA45GC Gauge Adaptor

Protect yourself from system overloading by simply ordering one part number for a pre-assembled gauge, adaptor block and coupler.

Page: 150



Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 136



Premium Hydraulic Oil

Use only genuine Enerpac Hydraulic Oil. The use of any other fluid will render your Enerpac warranty null and void.

Page: 140

Pump Type	Usable Oil Capacity (cm ³)	Model Number *	Pressure Rating (bar)	Oil Displacement per Stroke (cm ³)	Max. Handle Effort (kg)
Single-Speed	360	P18	200	2,46	16
	3277	P25	175	9,50	27
	3277	P50	350	4,75	27
	819	P51	200	4,10	27

* For use with single-acting cylinders and tools.

Low-Pressure Hand Pumps

P Series



Reservoir Capacity:


360 - 3277 cm³

Flow at Rated Pressure:


2,46 - 9,50 cm³/stroke

Maximum Operating Pressure:


175 - 350 bar

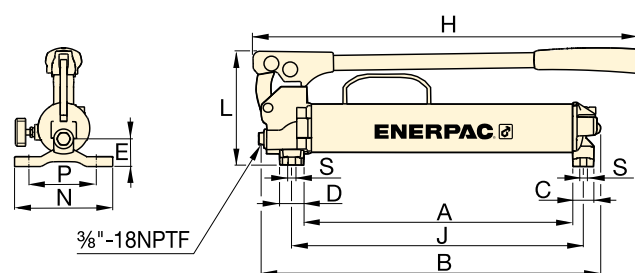

P18

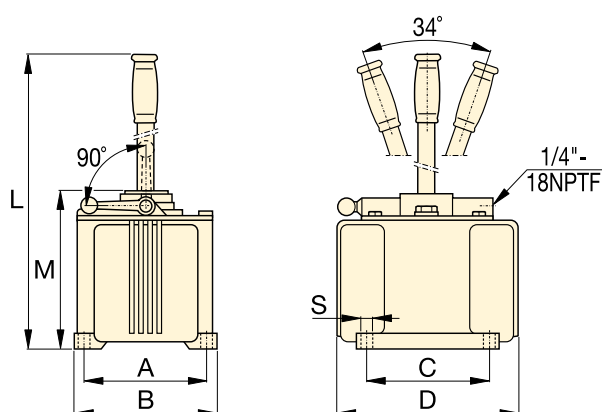

P25, P50

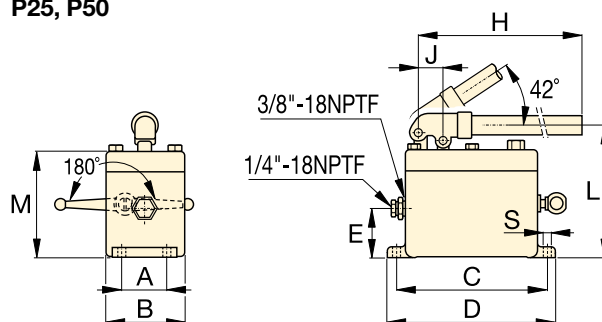

P51



MP-Series Multifluid Hand Pumps

Corrosion resistant hand pumps for low pressure filling and high pressure testing applications, suitable for a wide range of fluids.

Page: 84

▼ P51 hand pumps used with RC-Series cylinders to keep wooden layers under pressure during lamination of plates.



Piston Stroke	Dimensions (mm)													Model Number *
	(mm)	A	B	C	D	E	H	J	L	M	N	P	S	(kg)
25,4	221	316	30	35	37	385	254	163	–	140	111	8,4	5,0	P18
38,1	152	173	152	240	–	–	–	684	200	–	–	10	16,3	P25
38,1	152	173	152	240	–	–	–	684	200	–	–	10	16,8	P50
25,4	52	92	181	200	57	610	29	160	129	–	–	9	5,4	P51