

Lightweight Hydraulic Foot Pump

▼ P392FP



- **Robust, durable and compact**
 - Steel frame for maximum stability
 - Steel pumping handle
 - Aluminium reservoir
- **Foot pedal lock and lightweight construction for easy carrying**
- **Two-speed operation reduces foot pedal strokes**
- **Large foot-pad release valve for controlling load descent**
- **Internal pressure relief valve for overload protection.**

P Series



Reservoir Capacity:


492 cm³

Flow at Rated Pressure:

2,47 cm³/stroke

Maximum Operating Pressure:

700 bar



Pump-Cylinder Sets

The P392FP is available as **set** (pump, cylinder, gauge, couplers and hose) for your ordering convenience.

Page: 6




Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system, specify only genuine Enerpac hydraulic hoses.

Page: 136

▼ P392FP offers the advantage of hands-free operation to handle and control the tool or cylinder.

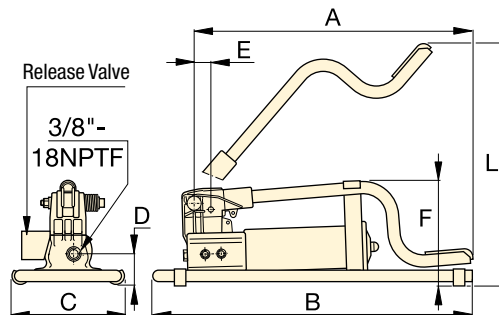

Usable Oil Capacity (cm ³)	Model Number	Pressure Rating (bar)		Oil Displacement per Stroke (cm ³)		Max. Handle Effort (kg)	Piston Stroke (mm)	 (kg)	Dimensions (mm)						
		1st stage	2nd stage	1st stage	2nd stage				A	B	C	D	E	F	L
492	P392FP *	15	700	11,26	2,47	42	25,4	7,0	504	600	193	52	30	187	433

* Available as set, see note on this page.