

▼ PA1150, PA133



PA Series

Reservoir Capacity:
36 - 80 in³

Flow at Rated Pressure:
8 in³/min

Air Consumption:
9.0 scfm

Maximum Operating Pressure:
10,000 psi



Reservoir Conversion Kit

Double the reservoir capacity of your existing **PA133** with this easy to install conversion kit.






Model Number

PC66

- Rugged construction – built for long life and easy service
- Swivel coupling simplifies hydraulic connection and pump operation
- 3-position treadle provides cylinder advance, hold or retract operation
- Operates in all positions for increased versatility in use and mounting (except PA1150)
- Base mounting slots provided on PA133.

OIL FLOW VERSUS PRESSURE

at 100 psi air pressure

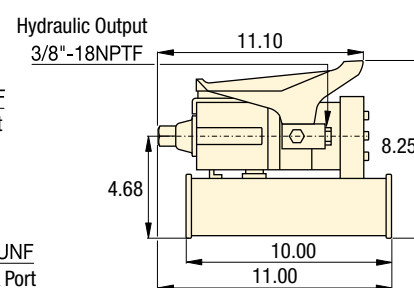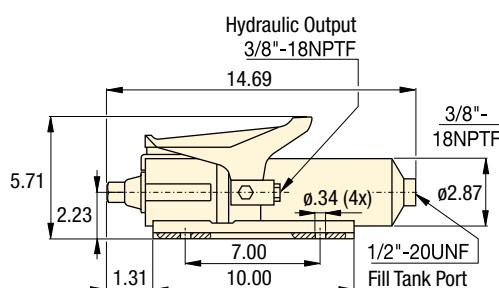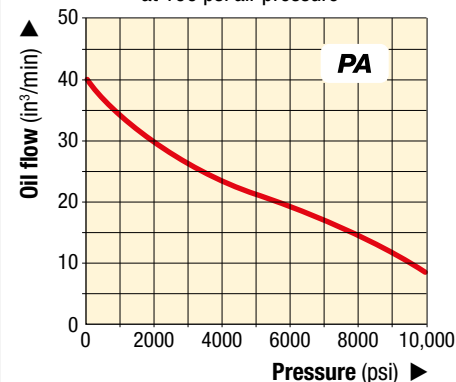

PA133

PA1150

Used with Cylinder	Usable Oil Capacity (in ³)	Model Number	Pressure Rating (psi)	Output Flow Rate (in ³ /min)		Valve Function	Air Pressure Range * (psi)	Air Consumption (scfm)	Sound Level (dBA)	 (lbs)
				No load	Load					
Single-Acting	36	PA133	10,000	40	8	Advance / Hold / Retract	60 - 120	9.0	85	12
	80	PA1150	10,000	49	8	Advance / Hold / Retract	60 - 120	9.0	85	18

* Recommended Regulator-Filter-Lubricator: **RFL102**.