

▼ Shown: PRASA10027L and accessory Locking U-Rings



Safe, Efficient, Mobile Load Lifting



Pendant cord

Standard 12 foot pendant cord for air driven units with pneumatic valves and 20 foot pendant cord for electric driven units keeps operator away from the load.

- 60, 100, 150 and 200-tons capacities with pneumatic or electric pumps for the toughest jobs
- 4 inches ground clearance for transport over rail and rough terrain
- Double-acting cylinder
- Three position handle provides easy tilt back and transport
- Complies with ASME/ANSI B30:1 2015 and CE specifications
- Easy to change external filter minimizes down time
- Rugged, fully enclosed 24 inches wide frame with no exposed fittings or hoses
- SUP-R-STACK™ Extension System allows lifting at all heights without blocking.



POW'R-LOCK™ – Self-Locking Mobile Lift System

A self-locking jack that performs automatic locking during lifting, lowering and holding.

See the Enerpac PL-Series.

Page: 72



◀ Enerpac POW'R-RISER® used in mining operations to lift heavy equipment.

Capacity	Stroke	Model Number with Electric Pump	
tons	(in)	(115V - 1 ph - 50-60Hz)	(lbs)
60	14	PREMB06014L	419
	27	PREMB06027L	640
100	16	PREMB10016L	510
	27	PREMB10027L	640
	16	-	-
150	27	-	-
	15.5	-	-
	26.5	-	-
	15.5	PREMB15016L	570
200	26.5	PREMB15027L	708
	15.3	-	-
	24.3	-	-

PR-Series not available in Canada. Contact Enerpac.

POW'R-RISER® Lifting Jack



SUP-R-STACK™ Extensions

Increase useful height from 5 to 18 inches.

Model No.	Size (in)	Model No.	Size (in)
PRE5	5	PRE11	11
PRE7	7	PRE14	14
PRE9	9	PRE18	18
PRES6024	Extension set includes PRE5, PRE7, PRE11 and PRE18.		



Spacers

Fine tune your extension stack height.

Model No.	Size (in)	Model No.	Size (in)
PRS1	1	PRS3	3
PRS2	2	-	-
PRS4	Set includes (2x) PRS1, (1x) PRS2 and (1x) PRS3.		

PR Series



Rated Lifting Capacity:

60 - 200 tons

Stroke:

14 - 27 inches

Maximum Operating Pressure:


6,000 psi

Cap.	Swivel Load Saddle	Locking U-Rings					Set Model Number	Locking U-Ring Sets Include:			
tons		1 inch	3 inches	4 1/4 inches	5 1/2 inches	10 inches		Quantity & model numbers			
60	PRTS60	PRU11	PRU13	PRU14	-	PRU110	¹⁾ PRUS126 ²⁾ PRUS137	PRU11	PRU13	PRU14	PRU110
100	PRTS60	PRU11	PRU13	PRU14	-	PRU110	¹⁾ PRUS126 ²⁾ PRUS137	PRU11	PRU13	PRU14	PRU110
150	PRTS150	PRU151	PRU153	-	PRU155	PRU1510	³⁾ PRUS1526 ²⁾ PRUS1537	PRU151	PRU153	PRU155	-
200	PRTS200	PRU201	PRU203	-	PRU205	PRU2010	³⁾ PRUS2026 ²⁾ PRUS2037	PRU201	PRU203	PRU205	-

¹⁾ For 14 and 16 inches stroke models

²⁾ For 27 inches stroke models

³⁾ For 15.5 inches stroke models.

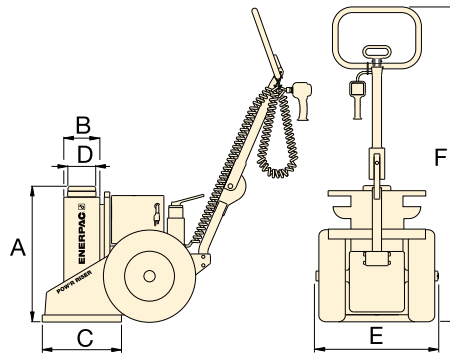

WARNING!

Extensions: Any two extensions may be stacked for loads up to 60 tons.

For loads over 60 tons or strokes over 14 inches only one extension and one spacer can be used.

Spacers:

Never exceed 3 inches in total spacer height.

Model Number with Air Pump	(lbs)	Dimensions (in)						Max. Stack Height ¹⁾ (in)	Valve Type
PRAMA06014L	419	24	7.0	14	4	24	56	32 ²⁾	Manual
PRAMA06027L	640	37	7.0	14	4	24	56	11	
PRAMA10016L	510	26	7.0	18	4	24	56	21 ³⁾	
PRAMA10027L	600	37	7.0	18	4	24	56	11	
PRASA10016L	510	26	7.0	18	4	24	56	21 ³⁾	Pneumatic
PRASA10027L	600	37	7.0	18	4	24	56	11	
PRASA15016L	570	26	8.0	18	5	24	56	21 ³⁾	
PRASA15027L	708	37	8.0	18	5	24	56	11	
-	-	26	8.0	18	5	24	56	21 ³⁾	Manual
-	-	37	8.0	18	5	24	56	11	
PRASA20016L	640	26	9.5	20	6	24	56	21 ³⁾	Pneumatic
PRASA20027L	825	37	9.5	20	6	24	56	11	

¹⁾ Maximum Additional Stack Height Using Optional Extension

²⁾ Based on one 18" and one 11" Extension and one 3" Spacer.

³⁾ Based on one 18" Extension and one 3" Spacer.

For power source, the following characters should be inserted in the 5th space of the model number.

Ordering Example:

PREMI06014L is a 14" stroke, 60 ton model, with a manual valve and a 208-240 VAC, 1-ph electric motor.

- A** Air Pump, 50 scfm, 80 psi
- B** 115 VAC, 1-ph., 50-60 Hz, 20 A
- E** 208-240 VAC, 1-ph., 50-60 Hz, Euro Plug, 10 A
- I** 208-240 VAC, 1-ph., 50-60 Hz, USA Plug, 10 A
- G** ¹⁾ 208-240 VAC, 3-ph., 50-60 Hz
- W** ¹⁾ 380-415 VAC, 3-ph., 50-60 Hz
- J** ¹⁾ 440-480 VAC, 3-ph., 50-60 Hz
- R** ¹⁾ 575 VAC, 3-ph., 50-60 Hz.

¹⁾ Not available for 60 tons capacity.