

RP120BP, Hydraulic Rail Puller

ENERPAC 

▼ RP120BP, Hydraulic Rail Puller



RP Series

Rated Pulling Capacity:

120 ton (1068 kN)

Stroke:

165 mm

Maximum Operating Pressure:

140 bar



Hydraulic Power Source


Unit runs off a HPU with pressure of 140 bar and a flow of 18,5 l/min minimum.

- Versatile design allows for quick and easy setup for stressing rail
- Compact, alloy steel design requires no disassembly for transport or storage
- Swing Arm clamps the bracket and eliminates the need for separate jaws and wedges
- Center beam swings up and out of the way
- Operator controls are positioned safely away from work area.



Rail Puller Brake Kit 18904

Minimizes movement of the rail puller in the event of shock load due to rail failure. Optional accessory for the RP120BP (a partial Kit is shown).

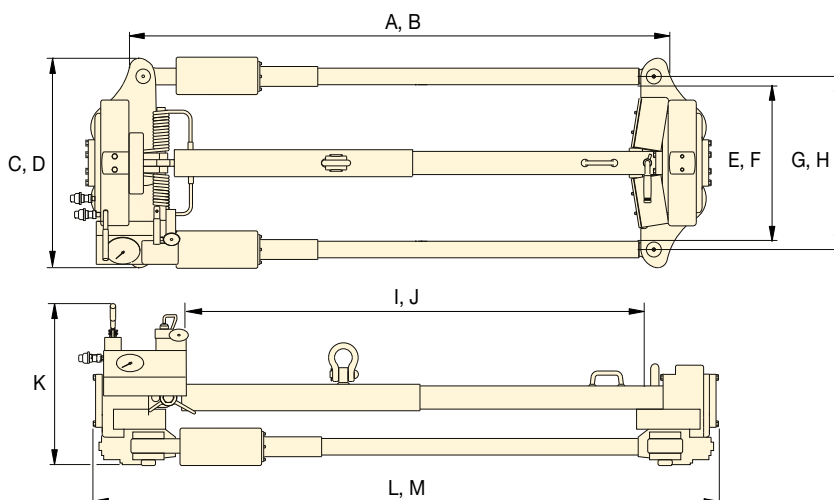

- A = Open
- B = Clamped
- C = Closed
- D = Open
- E = Clamped
- F = Open
- G = Clamped
- H = Open
- I = Clamped maximum
- J = Clamped minimum
- K = Height
- L = Clamp maximum
- M = Open minimum

Capacity ton (kN)	Stroke (mm)	Model Number	Dimensions (mm)													 (kg)
			A	B	C	D	E	F	G	H	I	J	K	L	M	
120 (1068)	165	RP120BP	1892	2121	838	889	610	660	673	724	1803	1641	584	2489	2261	526