

▼ SBL1100 with optional skid tracks, load beams, powered side shifts and lifting anchors



- Self-contained hydraulics and electronics
- Intelli-Lift wireless control system
- Self-propelled wheels or tank rollers
- Foldable boom on SBL600, SBL900 and SBL1100 to enable easy transport and set-up
- Full range of supplementary equipment: load beams, lifting anchors, side shifts and skid tracks
- All gantries comply to ASME B30.1, CE, UKCA and other safety standards
- Lloyds witness tested to 125% of maximum working load.

Precision Lift and Position of Heavy Loads

The Ultimate in Safety and Control



Intelli-Lift Wireless Control

The Intelli-Lift wireless control system is included with all Enerpac SL- and SBL-Series hydraulic gantries.

The Intelli-Lift controller offers superior safety and control and includes the following features:

- Encrypted bi-directional communication that eliminates interference from other devices
- Remote operation using multi-channel wireless (2.4 GHz) or wired (RS-485) control
- High and low speed settings
- Automatic synchronization of lifting with an accuracy of 0.95 inch
- Automatic synchronization of travelling with an accuracy of 0.60 inch
- Overload and stroke alarms
- Remote side shift control
- Emergency stop switch.



ML40, Mini-Lift Hydraulic Gantry

45-ton lifting capacity at full extended lift height. Even with its compact size, the ML40 can lift 45 tons to 18 feet, making it the most versatile portable gantry in the market.

Page: **362**

▼ Enerpac SBL-Series hydraulic gantries are used in a variety of applications to install turbines, transformers and other power generation equipment all over the world.



Maximum Capacity (with 4 towers)	Model Number (4 towers)	Retracted Height
(tons)		A (ft)
220	SL200J	8.96
450	SL400NJ	8.94
450	SL400J	10.39
674	SBL600J	14.11
1009	SBL900J	16.42
1178	SBL1100J	14.34

* J = 460 - 480 V, 3 ph, 50-60 Hz.

W = 380 - 415 V, 3 ph, 50 Hz

www.enerpac.com

Telescopic Hydraulic Gantries



Hydraulic Gantries

Telescopic Hydraulic Gantries are a safe, efficient way to lift and position heavy loads in applications where traditional cranes will not fit and permanent overhead structures for job cranes are not an option.

Hydraulic Gantries are placed on skid tracks to provide a means for moving and placing heavy loads, many times with only one pick.

Enerpac Hydraulic Gantry Systems:

- **ML-Series Mini-Lift**
Fits through standard doorway and is easily moved and set up.
The ML40 gantry can be moved through the tightest spaces imaginable in all industrial settings.

- **SL-Series Super Lift**
The cost-effective SL-Series Super Lift offer control and stability for everyday lifting applications below 450-ton up to 30 feet.
- **SBL-Series Super Boom Lift**
The heavy-duty SBL-Series Super Boom Lift boom style gantries offer increased lifting capacity of over 450-ton to heights of 39 feet.

All Enerpac gantries are delivered with specific properties and control systems to ensure optimum stability and safety.

SL, SBL Series



Capacity with 4 towers:
220 - 1178 tons

Lift Height:
14.31 - 39.38 feet

▼ Optional Gantry Accessories

Contact Enerpac for assistance by email at enerpac.com/contact-us



Skid Tracks

Allows for easy leveling of the gantry tower and reduce ground bearing pressure, available in two standard lengths, 10 and 20 ft.



Load Beams

Sold in pairs and includes lifting points and fork pockets for easy positioning on gantry towers. Available in standard lengths of 26.2, 32.8 and 39.3 ft.




Powered Side Shift

Electric propulsion controlled by standard gantry controls. Each set consists of 4 units.



Lifting Anchors

Designed to transfer the load to the top of the load beam. Can accommodate a 250-ton shackle or attach directly to the lifted load.

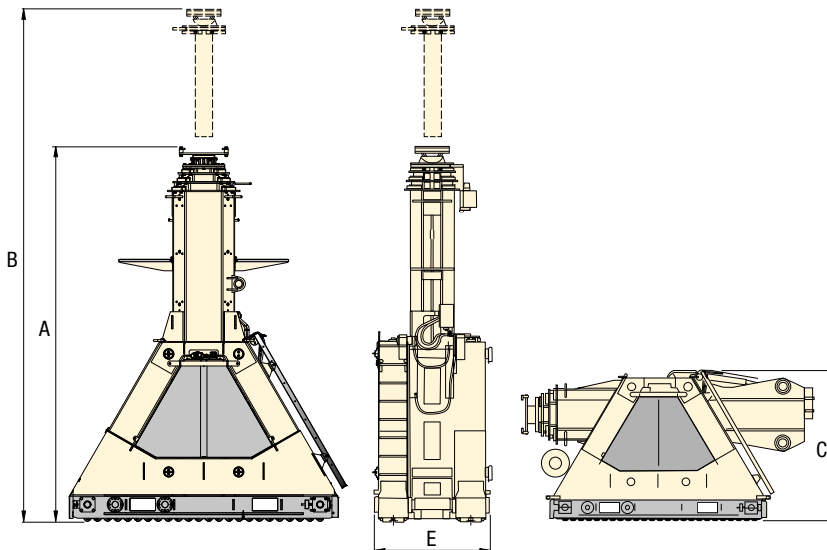

Stage 1		Stage 2		Stage 3		Transport Height	Skid Track Width		Model Number (4 towers)
Max. Height	Max. Capacity *	Max. Height	Max. Capacity *	Max. Height	Max. Capacity *				
B (ft)	(tons)	B (ft)	(tons)	B (ft)	(tons)	C (in)	E (in)	(lbs) ¹⁾	
15.47	220	21.98	150	—	—	102.8	31.97	4850	SL200J
14.31	450	19.76	337	25.26	220	107.3	31.97	7937	SL400NJ
17.14	450	23.73	450	29.99	208	124.8	47.95	10,141	SL400J
21.33	674	28.22	562	34.78	416	88.6	47.95	19,842	SBL600J
27.24	1009	37.09	664	—	—	88.3	47.95	29,432	SBL900J
22.98	1178	31.72	760	39.38	424	88.4	47.95	26,345	SBL1100J

* Maximum capacity with 4 towers.

¹⁾ Weight per tower