

▼ T6003L



## T Series

Pressure Range:  
**0 - 50,000 psi**

Face Diameter:  
**6.4 - 7.7 inches**

Accuracy, % of full scale:  
**± 0.5 - 1.5%**



### Cone Mount Gauge Adaptor

Contains fittings to connect 1/4" cone fitting gauge to 3/8" cone system. Kit includes **43-301** tee, **43-704** gauge adaptor and **45-116** tubing. Order Model Number: **83-011**.

Page: **87**



### Cone Mount Gauge Connector


For connecting gauges with 0.25" cone fitting directly to model number **11-100** or **11-400** pump (page 86). May be used with other

0.25" cone systems

Order Model Number: **43-704**

- Dual scale reading calibrated in psi and bar
- All gauges have spring-loaded backs with rubber blow-out plugs to protect case assembly in case of over-pressurization
- Integral maximum indicator pointer standard included
- 40,000 and 50,000 psi (2800 and 3500 bar) models include flange mounting
- 1/2" NPTF versions are made of high-strength alloy steel
- 0.25" cone models are made of 316 stainless steel, with 403 stainless steel on 40,000 and 50,000 psi models.

▼ An Enerpac P2282 hand pump equipped with a T6011L test system gauge is used for proof pressure testing of hydraulic valves.

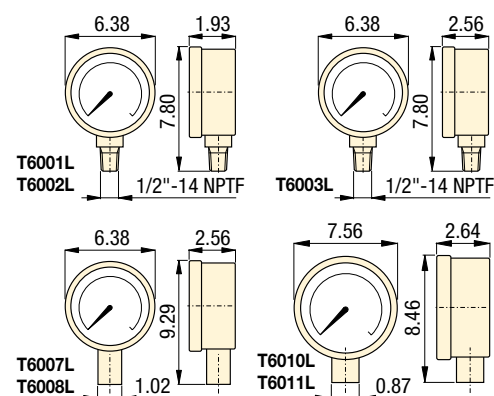

| Pressure Range | Pressure Range       | Model Number          |                            | Number Intervals | Graduation Intervals | Number Intervals | Graduation Intervals |
|----------------|----------------------|-----------------------|----------------------------|------------------|----------------------|------------------|----------------------|
| (psi)          | (bar)                | Alloy Steel 1/2" NPTF | Stainless Steel 0.25" cone | (psi)            | (psi)                | (bar)            | (bar)                |
| 0-1000         | 0-70 <sup>1)</sup>   | <b>T6001L</b>         | —                          | 100              | 10                   | 10               | 1                    |
| 0-5000         | 0-350 <sup>1)</sup>  | <b>T6002L</b>         | —                          | 500              | 50                   | 50               | 5                    |
| 0-10,000       | 0-700 <sup>1)</sup>  | <b>T6003L</b>         | <b>T6007L</b>              | 1000             | 100                  | 100              | 10                   |
| 0-20,000       | 0-1400 <sup>1)</sup> | —                     | <b>T6008L</b>              | 1000             | 100                  | 200              | 20                   |
| 0-40,000       | 0-2800 <sup>2)</sup> | —                     | <b>T6010L</b>              | 5000             | 200                  | 500              | 20                   |
| 0-50,000       | 0-3500 <sup>2)</sup> | —                     | <b>T6011L</b>              | 5000             | 200                  | 500              | 50                   |

<sup>1)</sup> Accuracy ± 0.5%

<sup>2)</sup> Accuracy ± 1.5%