

▼ TQ700B



Lightweight Torque Wrench Pumps



Four Port Manifold

The TQ700 offers an optional four wrench manifold as an accessory factory installed. Add suffix "M" at the end of the model number.


For example: **TQ700BM**.



Torque Wrench Hoses

Use Enerpac THQ-Series torque wrench hoses with 10,000 psi torque wrenches and pumps.

6.5 feet long, 2 hoses	THQ702T
19.5 feet long, 2 hoses	THQ706T
39 feet long, 2 hoses	THQ712T



Hydraulic Torque Wrenches

Enerpac offers a complete range of square drive and hexagon cassette torque wrenches.

Page: **219**



Overlay Kit with Gauge

Available separately for use with TQ-Series: **GT4015Q** includes gauge and torque overlays for all Enerpac torque wrenches.

- Optimized flow technology – three stage pump maximizes productivity of the pump and tool while minimizing heat build-up and down time
- Heat exchanger is standard included
- A quiet (<85 dBA), lightweight pump with a compact footprint – easy to move around and through the work site
- Durable roll cage with an ergonomically sized handle and shielded gauge – a pump that is easy to put into position and safe from on site operational hazards
- Maintenance made simple with a brushless motor designed for continuous usage
- Straightforward operation with a simple pressure set and convenient to use 20 foot pendant control – immediate productivity for crews operating the pump
- IP55 Rating for Superior Dust and Water Protection
- Transparent gauge overlays in Ft.lbs and Nm for all Enerpac torque wrenches provide a quick torque reference.



The TQ700B and the W-Series wrenches are a productive combination in wind applications.




TQ700 Applications

The TQ700 Series pump is ideal for powering hydraulic wrenches for the Power Generation and Wind Markets.

Bolting speed is more complex than how much flow per minute the pump produces. The key is optimising the flow rate across the entire bolting cycle. With more oil flowing at the right time and at the right volume, you achieve the optimized flow for a hydraulic bolting system.

The result of this optimized flow is more bolts tightened faster and a more productive work team.

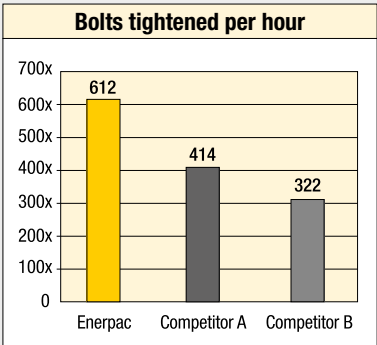

Internal laboratory testing based on standard torquing procedure on a pipe flange with 14, 1 1/2" bolts.

TQ Series



Reservoir Capacity:

1.0 gallons

Flow at Rated Pressure:

30 in³/min

Motor Size:

1.0 hp

Maximum Operating Pressure:


10,000 psi



Torque Pump Selection Matrix

For optimum speed and performance see the torque pump and hose selection matrix.

Page: 273

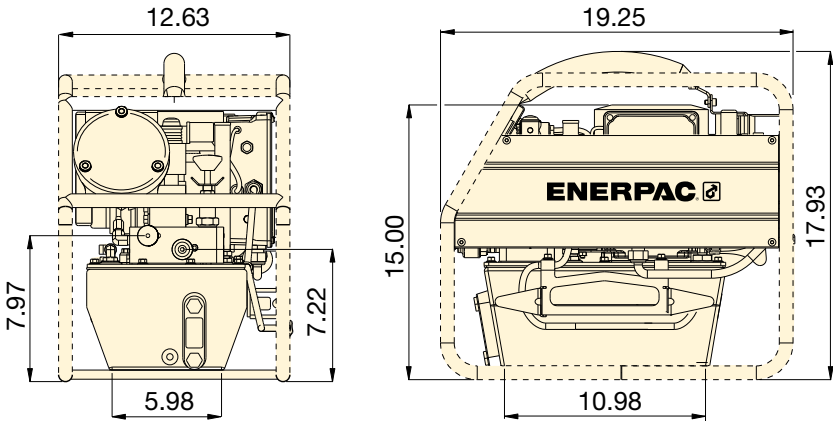

For Use with Torque Wrenches	Pressure Rating	Model Number ¹⁾	Useable Oil Capacity	Motor Size	Motor Electrical Specifications	Sound Level	
	(psi)		(gal)	(hp)	(Volt - Ph - Hz)	(dBA)	(lbs)
All Series	10,000	TQ700B	1.0	1.0	115 - 1 - 50/60	82 - 85	68
	10,000	TQ700E ²⁾	1.0	1.0	230 - 1 - 50	82 - 85	66
	10,000	TQ700I ³⁾	1.0	1.0	230 - 1 - 60	82 - 85	66

¹⁾ All models meet CE safety requirements and all TÜV requirements.

²⁾ TQ700E with European plug and CE EMC directive compliant.

³⁾ TQ700I with NEMA 6-15 plug.

▼ The TQ700B and the W-Series wrenches are a productive combination.

