

▼ Shown from left to right: VLP106P142U, XLP506XA12GU, XLP256XA11GU



No workshop can do without one



XA-Series Foot Pump

The XLP-Series Presses with XA-Series Air Powered Foot Pump: no need to fully lift up foot – rest bodyweight on heel, resulting in a handsfree and stable working position – safe and controlled press operation.



Press Kits

The 50 and 75-tons XLP-Series presses come standard as unassembled kits, and include complete press frame, winch, cylinder, pump with gauge, couplers and hose.



Easy Grip Forklift Access

Cut-away in lower frame for pallet truck access allows easy transportation of 50 and 75-tons XLP-Series Presses.



Side-To-Side Cylinder Movement

Cylinder can be positioned horizontally side-to-side on all XLP-Series presses.

VLP-Series Bench Presses

- Compact design mounts conveniently on bench top
- Operational in vertical or horizontal position.

XLP-Series Workshop Presses

- Easy height adjustment with integrated winch mechanism
- Horizontal cylinder adjustment enables flexible load placement
- Multiple pump options including pneumatic foot-controlled pumps with integrated gauges for optimal control and variable oil flow
- 50 and 75-tons presses provided in kit form.

Press Capacity	Maximum Vertical Daylight	Maximum Bed Width	Press Model Number	Power Source						Cylinder			
				Pump Type			Valve Type		Pump Model Number	S/A 	D/A 	Stroke (in)	Cylinder Model Number
				Man.	Electr.	Air	Man.	Electr.					
10	16.73	17.13	VLP106P142U	●			●		P142	●		6.13	RC106
	16.73	17.13	VLP106PAT1U			●	●		PATG1102N	●		6.13	RC106
25	47.68	20.08	XLP256P392U	●			●		P392	●		6.25	RC256
	47.68	20.08	XLP256XA11GU			●	●		XA11G	●		6.25	RC256
50	37.80	38.98	XLP506P802U	●			●		P802	●		6.25	RC506
	37.80	38.98	XLP506XA12GU			●	●		XA12G	●		6.25	RC506
	37.80	38.98	XLP5013ZEBU		●			●	ZE4408SB		●	13.13	RR5013
	37.80	38.98	XLP5013ZEIU		●			●	ZE4408SI		●	13.13	RR5013
75	37.60	38.98	XLP756XA12GU			●	●		XA12G	●		6.13	RC756

S/A = Single-Acting
D/A = Double-Acting

Bench & Workshop Presses



Bringing Value to the Workshop

The VLP- and XLP-Series Presses provide a simple and economical solution for standard workshop applications.

The 10-tons VLP comes standard with an RC-Series cylinder and a hand or air pump. Compact and versatile, it's the ideal solution for pressing smaller workpieces from the comfort of a workbench.

The similarly equipped 25-tons XLP features a sturdy welded H-frame, an adjustable bolster and a horizontally adjustable cylinder.

The 50- and 75-tons XLP Presses offer an exceptional value with features including adjustable lower and upper bolsters, horizontally adjustable cylinders, single- and double acting cylinders*, and multiple pump options. These presses come standard as unassembled kits which include the frame, winch, cylinder, pump, gauge, couplers and hose.

* On select models.

For premium performance in more demanding applications, Enerpac also offers the IP-Series Presses, which features heavy-duty welded frames and a broad range of cylinder and pump options. Contact Enerpac for additional information.

All standard VLP and XLP-Series presses include a hose and gauge.

10 tons: **GF10P** gauge + **HC7206** hose
25 tons: **GF20P** gauge + **HC7210** hose
50 tons: **GF50P** gauge + **HC7210** hose(s)
75 tons: ** + **HC7210** hose

** The presses that come with an XA-Series Air pump have the gauge integrated into the pump.

For more information on gauges and hoses, please refer to the System Components section.

VLP, XLP Series



Capacity:

10 - 75 tons

Maximum Daylight and Width:

47.68 & 38.98 inches


Maximum Operating Pressure:

10,000 psi




IMPORTANT!


All Enerpac presses are designed exclusively for pressing operations, not for pulling. For pulling applications, please contact Enerpac.



VLP 10 tons



XLP 25 tons

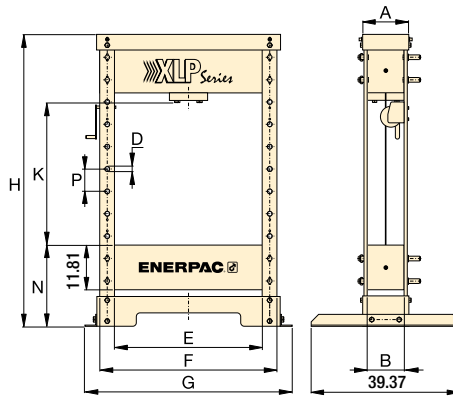

XLP 50 and 75 tons



Optional V-Blocks for VLP- and XLP-Series Presses

Place upright to facilitate the positioning of pipes and bars, or upside down to serve as a convenient work table. Each model number includes two V-blocks.

Press Type	Capacity (tons)	V-Blocks (2x) Model Number
VLP	10	VB10
XLP	25	VB25
XLP	50	VB501
XLP	75	VB101

Cylinder Speed (inches/sec) *		Dimensions (in)															Press Model Number
Rapid Advance	Pressing	A	B	C	D	E	F	G	H	J	K	M	N	O	P	(lbs)	
0.10 *	0.02 *	4.33	3.15	—	—	17.13	—	21.26	24.21	29.61	16.73	—	3.15	—	—	108	VLP106P142U
0.45	0.07	4.33	3.15	—	—	17.13	—	21.26	24.21	29.61	16.73	—	3.15	—	—	119	VLP106PAT1U
0.13 *	0.03 *	10.63	5.51	20.08	1.26	20.08	24.80	27.95	63.78	67.13	14.06-47.68	5.51	8.58	42.20	4.80	364	XLP256P392U
0.39	0.05	10.63	5.51	—	1.26	20.08	24.80	27.95	63.78	67.13	14.06-47.68	—	8.58	42.20	4.80	375	XLP256XA11GU
0.22 *	0.01 *	12.20	9.45	—	1.26	38.98	46.85	54.72	76.97	—	8.27-37.80	—	21.46	—	5.91	1312	XLP506P802U
0.18	0.02	12.20	9.45	—	1.26	38.98	46.85	54.72	76.97	—	8.27-37.80	—	21.46	—	5.91	1323	XLP506XA12GU
0.98	0.09	12.20	9.45	—	1.26	38.98	46.85	54.72	76.97	79.53	8.27-37.80	—	21.46	—	5.91	1530	XLP5013ZEBU
0.98	0.09	12.20	9.45	—	1.26	38.98	46.85	54.72	76.97	79.53	8.27-37.80	—	21.46	—	5.91	1530	XLP5013ZEIU
0.13	0.02	16.54	12.99	—	1.65	38.98	48.43	56.30	76.97	—	8.07-37.60	—	21.46	—	5.91	1984	XLP756XA12GU

* = speed in inches per hand pump stroke.