

ABB BALDOR RELIANCE III

Customer information packet

BSM80C-2150AA

BSM80C-2150AA T'STAT RESOLVER

Specifications


Enclosure	TENV
Motor Type	S216B
Nameplate Speed	2000
Agency Approvals	CE
	CSA
	UR
	WEEE
Base Indicator	Bracket Mounted
Dimensional Drawing Numbers	S2LYP166
Frame	D100D
Frame Material	Exposed Laminations
Motor Lead Quantity/Wire Size	3 @ 18 AWG
Motor Standards	IEC
Mounting Arrangement	F1
Nameplate Output	0.48KW
Shaft Rotation	Reversible

Part Detail

Revision	F
Type	AC
Mech. spec.	S2P166
Base	
Status	PRD/A
Elec. spec.	S2WGW128
Layout	S2LYP166
Eff. date	05-29-2026
CD Diagram	CD0006A02
Poles	04
Leads	3#18
Proprietary	False
Created date	03-06-2024


Nameplate

NP2864L									
CAT.NO.									
BLANK									
SPEC.	S2P166W128								
MFG.NO.									
TORQ CONT STALL	2 NM								
CUR CONT STALL/A RMS	1.67								
POWER	0.42KW								
RATED SPEED/RPM(1/MIN)	2000								
RATED BUS VOLTS	320								
PEAK CUR/A RMS	5								
MAX SPEED/RPM(1/MIN)	7000				AMB.		25		
CLASS	F	IP	54	IC	410	MOTOR MASS		5.4	

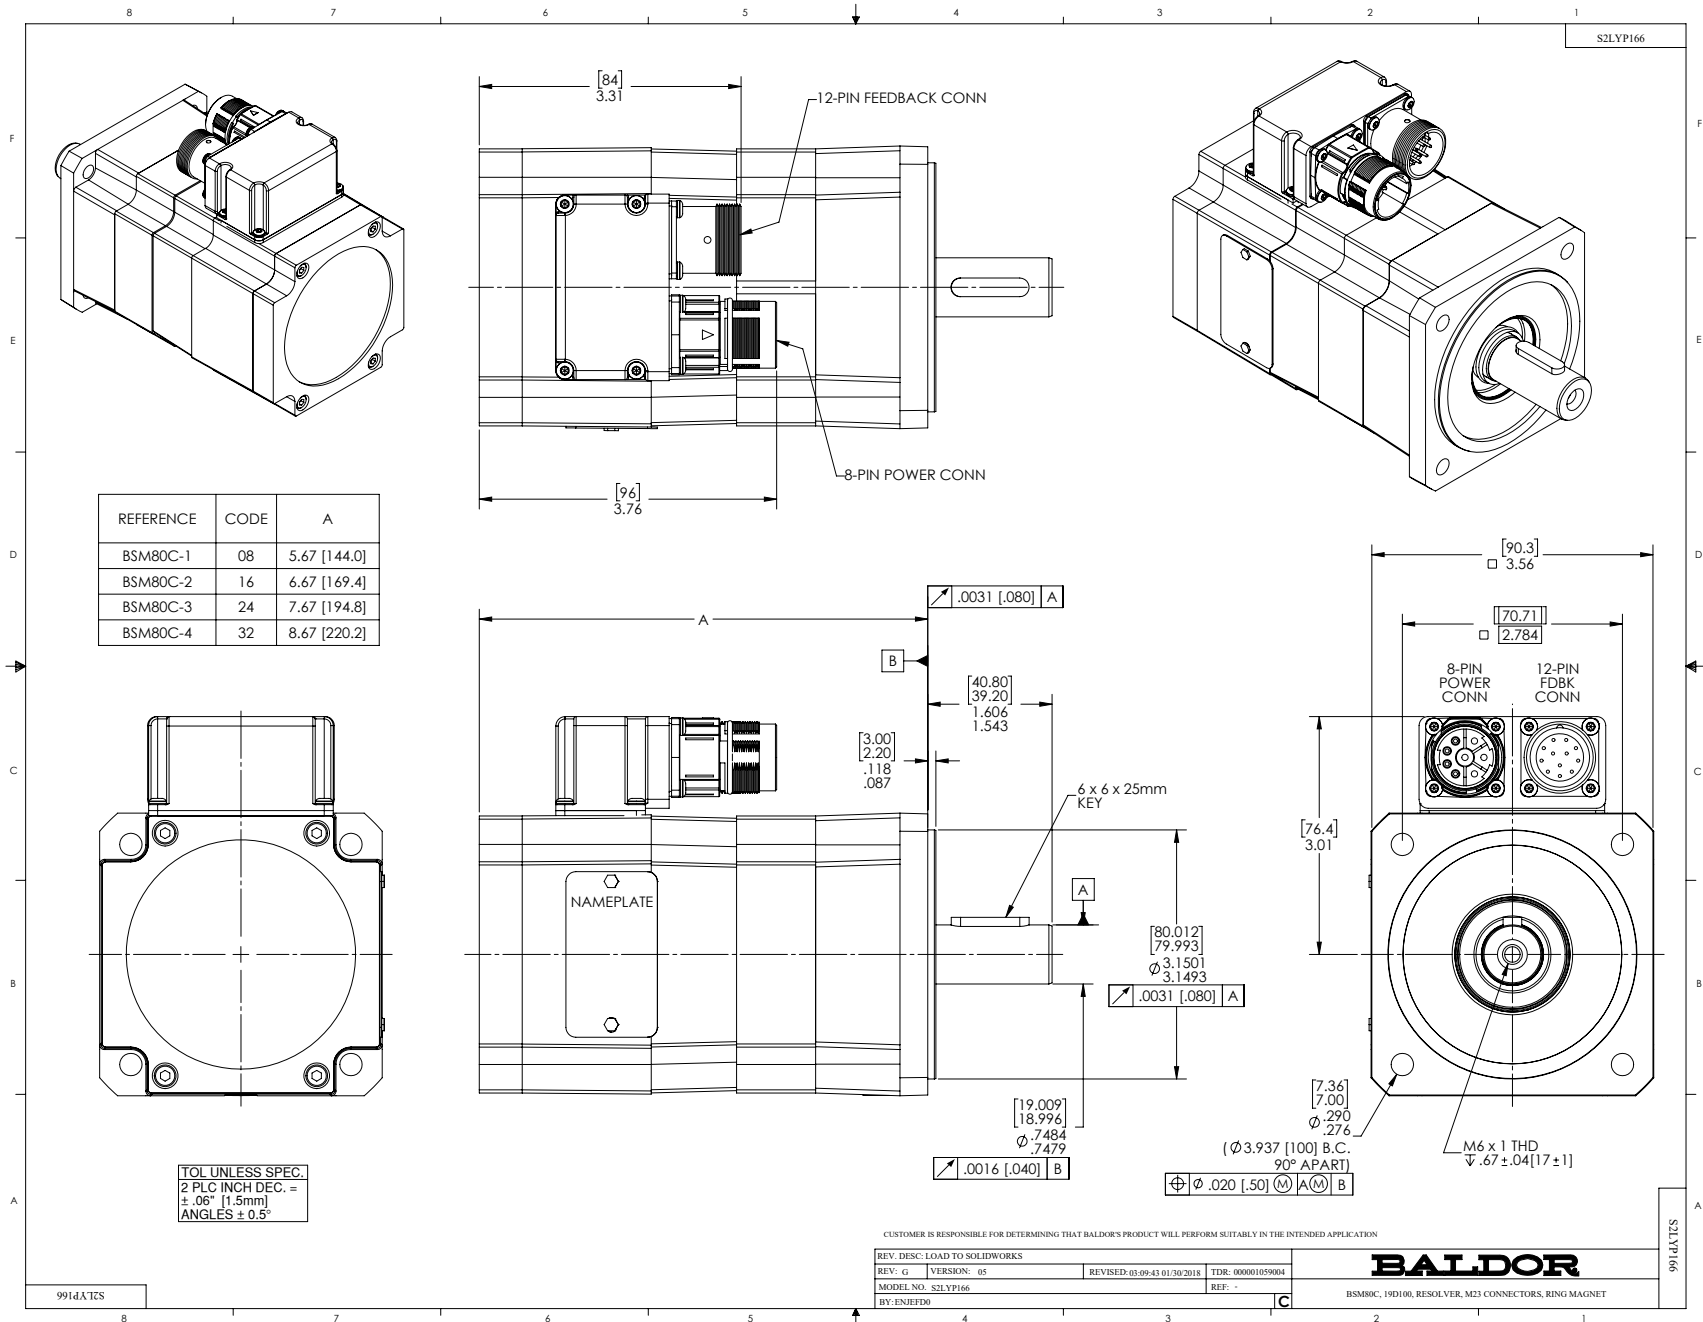


CD1321

8 PIN THREADED CONNECTOR
(CRIMP STYLE)
(INSERTION SIDE)



12 PIN THREADED CONNECTOR
(CRIMP STYLE)
(INSERTION SIDE)



MOTOR CONNECTIONS

PIN	FUNCTION	INTERNAL/EXTERNAL MARKINGS
A	THERMAL SWITCH	YELLOW
B	THERMAL SWITCH	YELLOW
C	BRAKE (OPTIONAL)	BLACK (* RED)
D	BRAKE (OPTIONAL)	BLACK
1	U	BLACK OR T1
2	GROUND	GREEN OR **GREEN/YELLOW
3	W	BLUE OR T3
4	V	RED OR T2

* WHEN REQUIRED
**CE MOTORS REQUIRE GREEN/YELLOW GROUND

RESOLVER CONNECTIONS

PIN	FUNCTION	INTERNAL WIRE COLOR
1	REF HI R1	RED/WHITE
2	REF LO R2	YELLOW/WHITE
3	COS+ S1	RED
4	COS- S3	BLACK
5	SINE- S4	BLUE
6	SINE+ S2	YELLOW


REV. DESC: ADD CE NOTE AND GREEN/YELLOW GROUND		
REV. LTR: F	VERSION: 03	TDR: 000001192301
FILE: \AAA\00055\309	REVISED: 02: 34: 44 06/13/2022	BY: ENDANDO
MTL: —		

BALDOR - RELIANCE®

BSM WIRING DIAG, POWER & RESOLVER, 8 & 12 PIN THD CONNECT.
SH 1 of 1

CD1321

CD0006A02

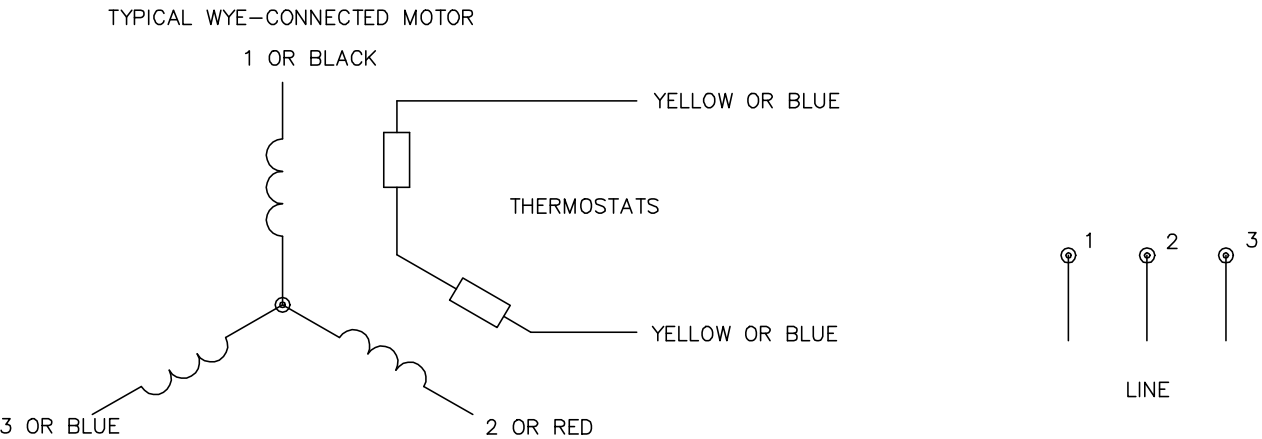

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.

REV. DESC: REMOVED "OPTIONAL" FROM PRINT, SERVO REQ'S T'STATS		
REV. LTR: D	VERSION: 03	TDR: 000000414937
CD0006A02	FILE: \AAA\00068\606	REVISED: 10:02:28 11/21/2006
	MTL: -	BY: ENJFDO

BALDOR ELECTRIC Co.

3PH, SV, 3 LEADS, WYE CONNECTED

CD0006A02