

ABB Motors and Generators		Technical Data Sheet - DOL				
		Project		Location		
Department/Author		Customer name		Customer ref.		Item name
Our ref.		Rev/Changed by	Date of issue	Saving ident		Pages 1(3)


No.	Definition	Data	Unit	Remarks	
1	Product	TEFC, 3-phase, squirrel cage induction motor			
2	Product code	MM08112-AP (3GAA081313-ASE+332)			
3	Type/Frame	M3AA 80 C 2			
4	Mounting	IM1001, B3(foot)			
5	Rated output P _N	1.1	kW		
6	Service factor	1			
7	Type of duty	S1(IEC) 100%			
8	Rated voltage U _N	230	VD	± 5 % (IEC 60034-1)	
9	Rated frequency f _N	50	Hz	± 2 % (IEC 60034-1)	
10	Rated speed n _N	2875	r/min		
11	Rated current I _N	4.2	A		
12	No-load current	2.4	A		
13	Starting current I _s /I _N	7.8		Fullfilled IEC 60034-12 design N,H	
14	Nominal torque T _N	3.7	Nm		
15	Locked rotor torque T _S /T _N	3.6			
16	Maximum torque T _{max} /T _N	3.5			
17	Minimum torque T _{min} /T _N	3.2			
18	Speed at minimum torque	480	r/min		
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %	Power factor
20	PLL determined from residual loss	100	4.2	80.6 / IE2	0.8
21		75	3.6	80.4	0.71
22		50	3	77.9	0.58
23		Start	33		0.77
24	Maximum starting time from hot	15	s		
25	Maximum starting time from cold	27	s		
26	Insulation class / Temperature class	F / B			
27	Ambient temperature	40	°C		
28	Altitude	1000	m.a.s.l.		
29	Enclosure	IP55			
30	Cooling system	IC411 self ventilated			
31	Bearing DE/NDE	6204-2Z/C3 - 6203-2Z/C3			
32	Type of Grease	Greased for life			
33	Sound pressure level (LP dB(A) 1m)	60	dB(A)		at load
34	Moment of inertia J = ¼ GD2	0.0012	kg-m2		
35	Balancing	Half Key			
36	Vibration class	Grade A			
37	Position of terminal box	Top			
38	Terminal box entries; no, dimens.	2xM20			
39	Number of power terminals	6			
40	Direction of rotation	CW or CCW			
41	Weight of rotor	2	kg		
42	Total weight of motor	11	kg		
43					

Variant Codes / Definition

332 = Baldor catalog number

Remarks:

Data based on situation 4/4/2012
All data subject to tolerances in accordance with IEC
Guaranteed values on request

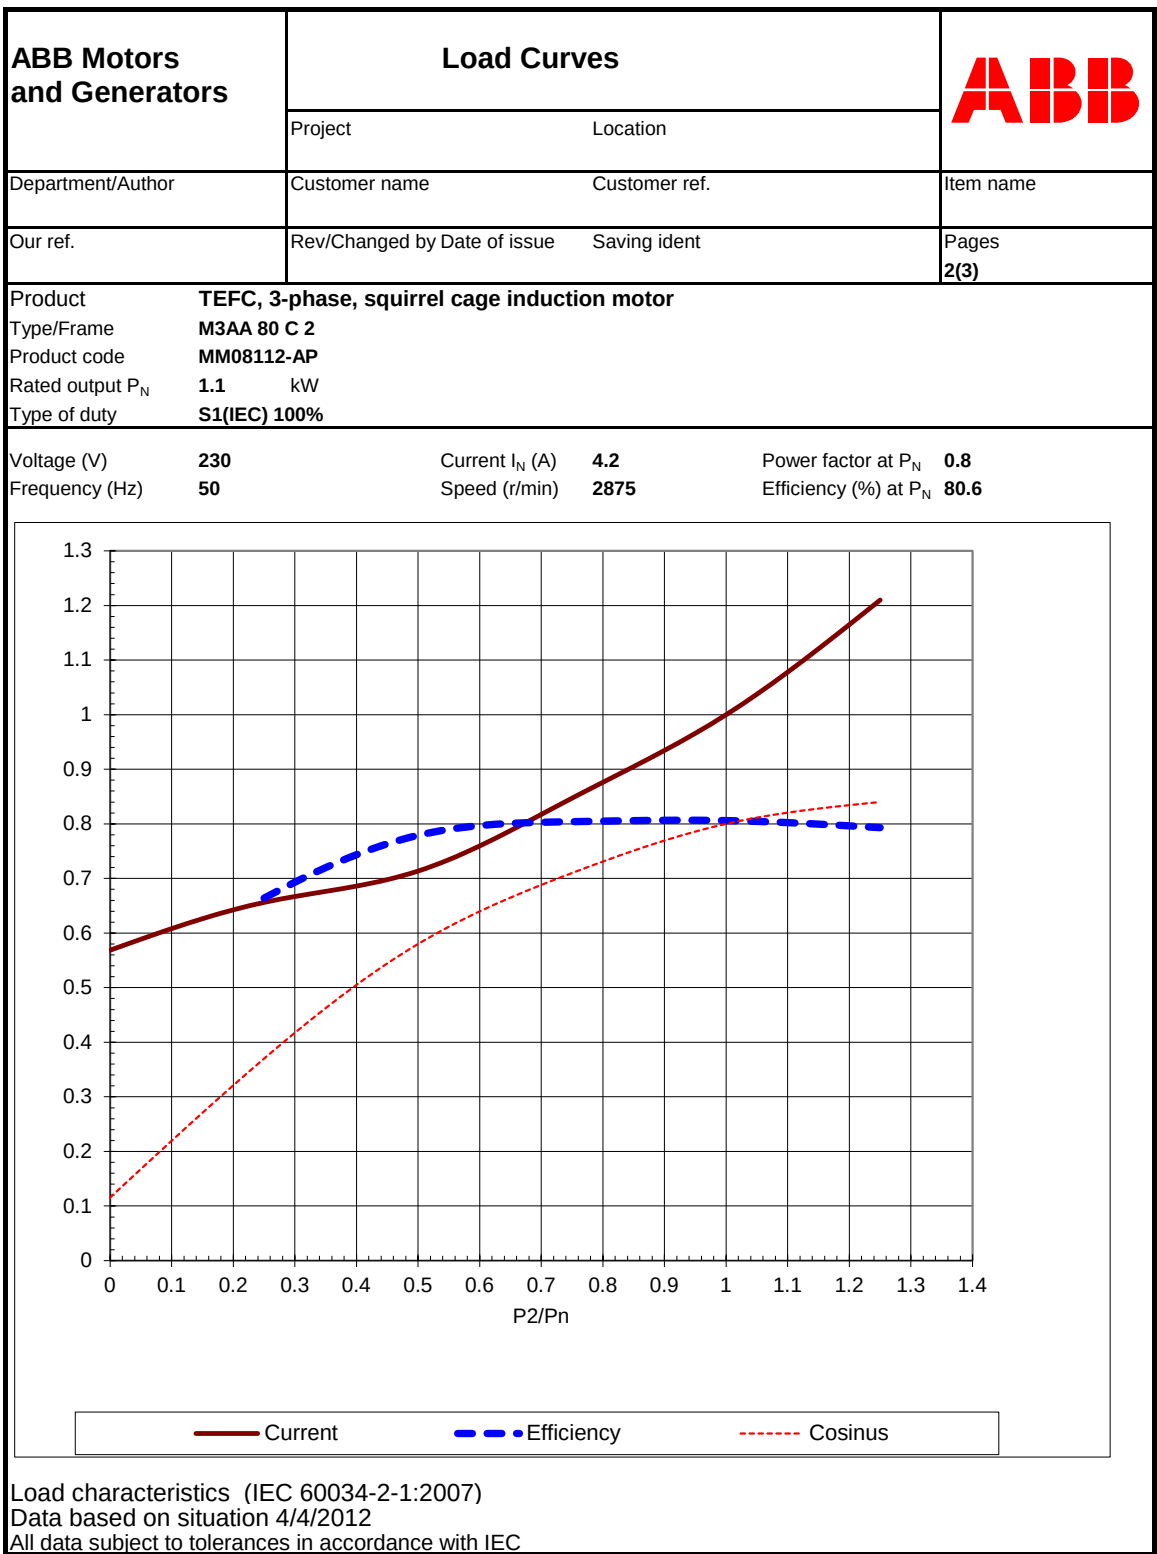

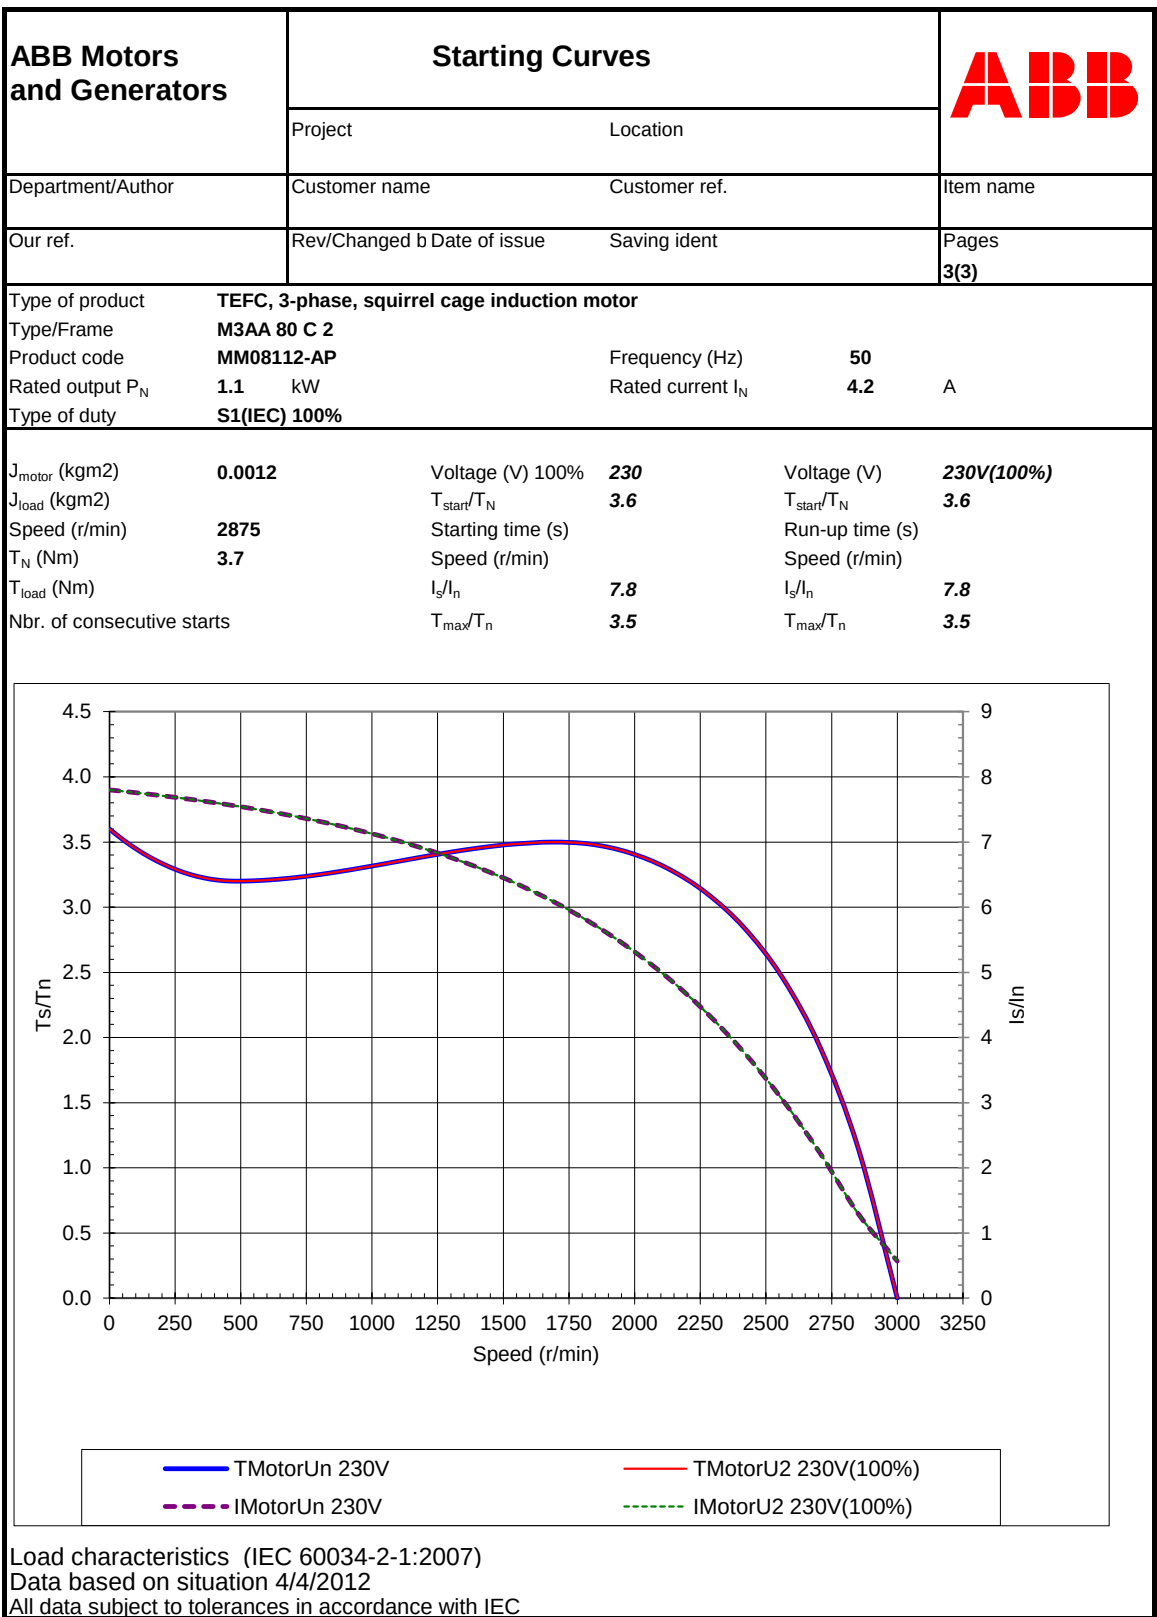



ABB Motors and Generators		Technical Data Sheet - DOL			
		Project _____		Location _____	
Department/Author _____		Customer name _____		Customer ref. _____	
Our ref. _____		Rev/Changed by _____		Date of issue _____	
		Saving ident _____		Pages 1(3)	

No.	Definition	Data	Unit	Remarks	
1	Product	TEFC, 3-phase, squirrel cage induction motor			
2	Product code	MM08112-AP (3GAA081313-ASE+332)			
3	Type/Frame	M3AA 80 C 2			
4	Mounting	IM1001, B3(foot)			
5	Rated output P _N	1.1	kW		
6	Service factor	1			
7	Type of duty	S1(IEC) 100%			
8	Rated voltage U _N	400	VY	± 5 % (IEC 60034-1)	
9	Rated frequency f _N	50	Hz	± 2 % (IEC 60034-1)	
10	Rated speed n _N	2875	r/min		
11	Rated current I _N	2.4	A		
12	No-load current	1.4	A		
13	Starting current I _s /I _N	7.8		Fullfilled IEC 60034-12 design N,H	
14	Nominal torque T _N	3.7	Nm		
15	Locked rotor torque T _S /T _N	3.6			
16	Maximum torque T _{max} /T _N	3.5			
17	Minimum torque T _{min} /T _N	3.2			
18	Speed at minimum torque	480	r/min		
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %	
20	PLL determined from residual loss	100	2.4	80.6 / IE2	
21		75	2	80.4	
22		50	1.75	77.9	
23		Start	19.2	0.77	
24	Maximum starting time from hot	15	s		
25	Maximum starting time from cold	27	s		
26	Insulation class / Temperature class	F / B			
27	Ambient temperature	40	°C		
28	Altitude	1000	m.a.s.l.		
29	Enclosure	IP55			
30	Cooling system	IC411 self ventilated			
31	Bearing DE/NDE	6204-2Z/C3 - 6203-2Z/C3			
32	Type of Grease	Greased for life			
33	Sound pressure level (LP dB(A) 1m)	60	dB(A)	at load	
34	Moment of inertia J = ¼ GD2	0.0012	kg-m2		
35	Balancing	Half Key			
36	Vibration class	Grade A			
37	Position of terminal box	Top			
38	Terminal box entries; no, dimens.	2xM20			
39	Number of power terminals	6			
40	Direction of rotation	CW or CCW			
41	Weight of rotor	2	kg		
42	Total weight of motor	11	kg		
43					

Variant Codes / Definition
 332 = Baldor catalog number

Remarks:

 Data based on situation 4/4/2012
 All data subject to tolerances in accordance with IEC
 Guaranteed values on request

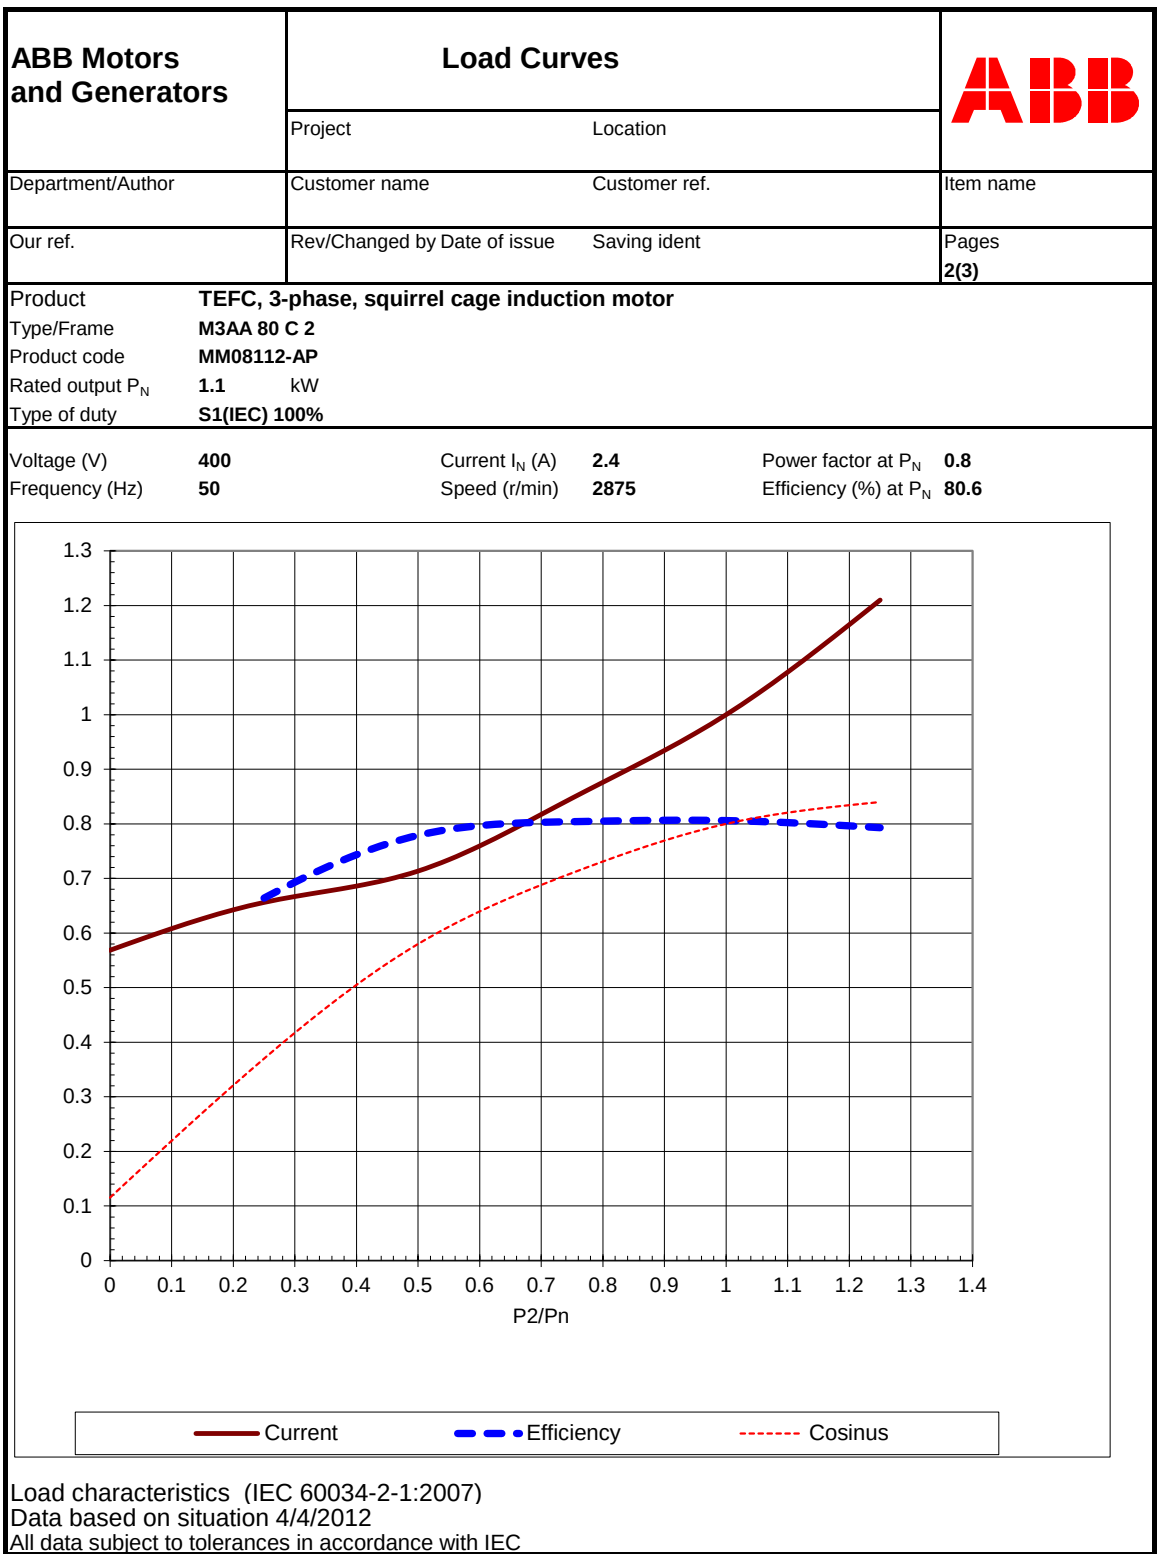

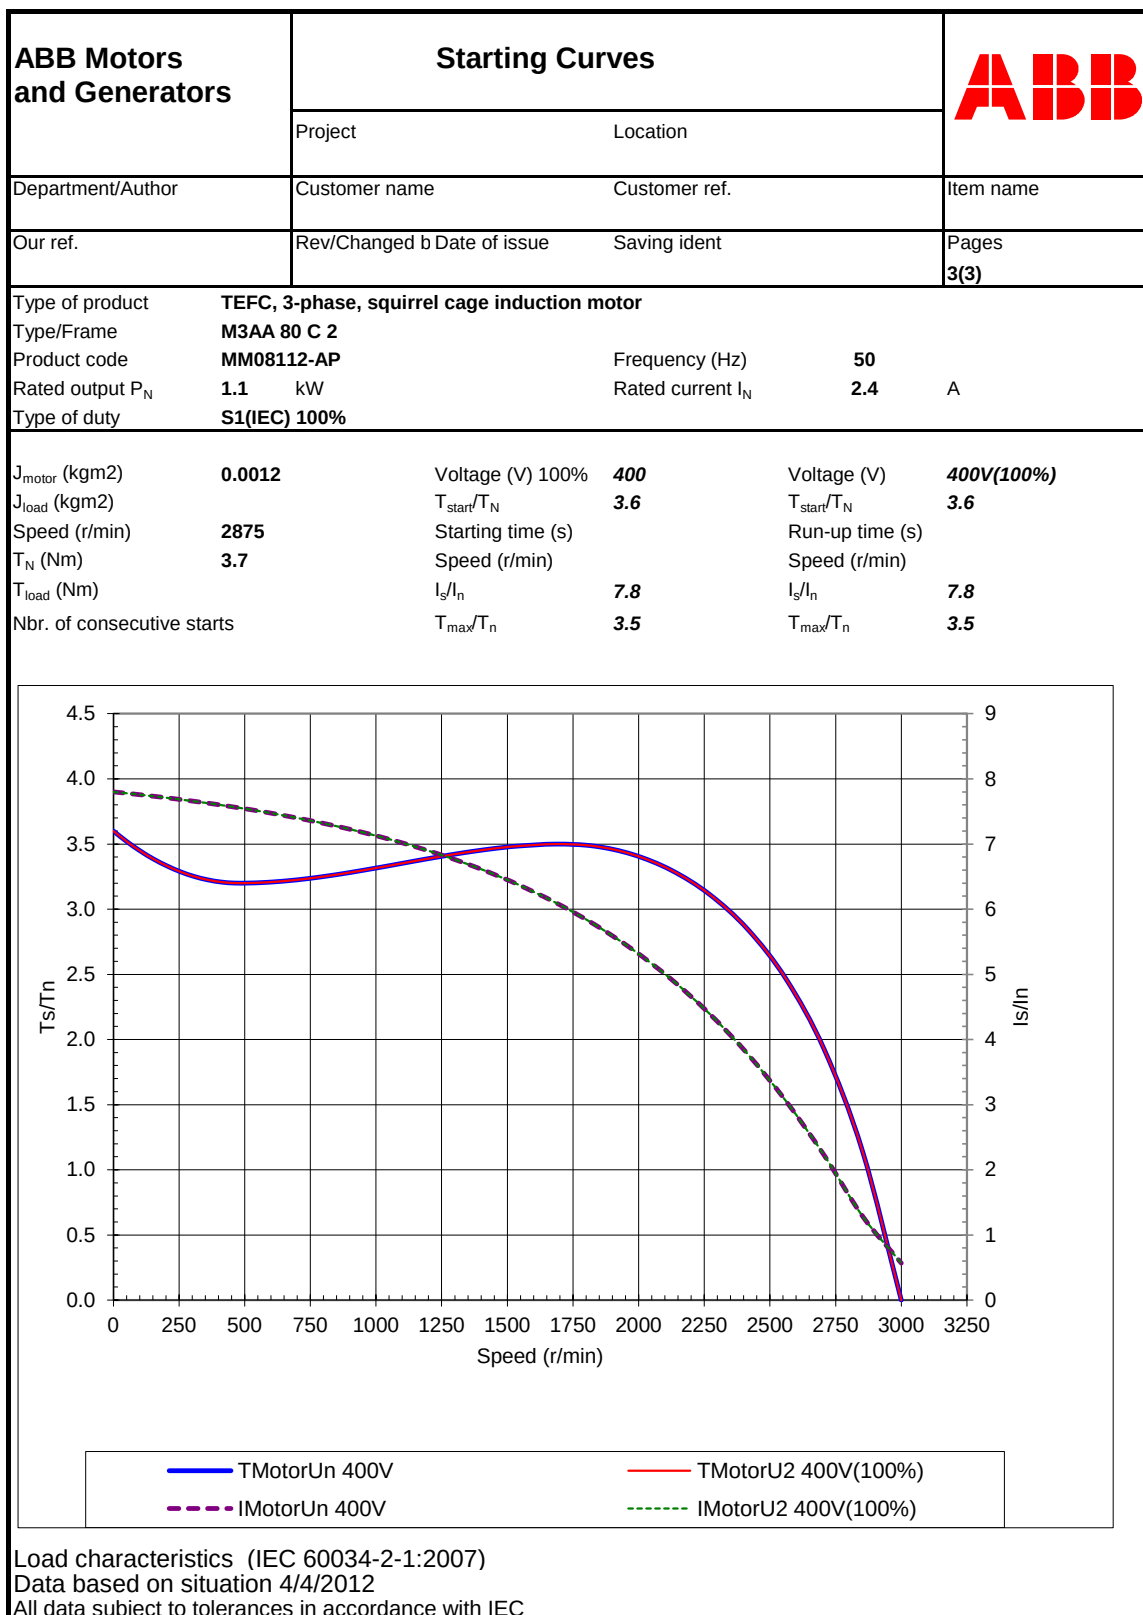


ABB Motors and Generators		Technical Data Sheet - DOL				
		Project		Location		
Department/Author		Customer name		Customer ref.		Item name
Our ref.		Rev/Changed by	Date of issue	Saving ident	Pages 1(3)	

No.	Definition	Data	Unit	Remarks	
1	Product	TEFC, 3-phase, squirrel cage induction motor			
2	Product code	MM08112-AP (3GAA081313-ASE+332)			
3	Type/Frame	M3AA 80 C 2			
4	Mounting	IM1001, B3(foot)			
5	Rated output P _N	1.1	kW		
6	Service factor	1			
7	Type of duty	S1(IEC) 100%			
8	Rated voltage U _N	460	VY	± 5 % (IEC 60034-1)	
9	Rated frequency f _N	60	Hz	± 2 % (IEC 60034-1)	
10	Rated speed n _N	3490	r/min		
11	Rated current I _N	2.1	A		
12	No-load current	1.4	A		
13	Starting current I _s /I _N	9.1		Fullfilled IEC 60034-12 design N,H	
14	Nominal torque T _N	3	Nm		
15	Locked rotor torque T _S /T _N	3.9			
16	Maximum torque T _{max} /T _N	4.2			
17	Minimum torque T _{min} /T _N	3.5			
18	Speed at minimum torque	576	r/min		
19	Load characteristics (IEC 60034-2-1:2007)	Load %	Current A	Efficiency %	Power factor
20	PLL determined from residual loss	100	2.1	82.6 / IE2	0.78
21		75	1.83	81.9	0.69
22		50	1.56	78.7	0.56
23		Start	19.5		0.77
24	Maximum starting time from hot	15	s		
25	Maximum starting time from cold	27	s		
26	Insulation class / Temperature class	F / B			
27	Ambient temperature	40	°C		
28	Altitude	1000	m.a.s.l.		
29	Enclosure	IP55			
30	Cooling system	IC411 self ventilated			
31	Bearing DE/NDE	6204-2Z/C3 - 6203-2Z/C3			
32	Type of Grease	Greased for life			
33	Sound pressure level (LP dB(A) 1m)	67	dB(A)		at load
34	Moment of inertia J = ¼ GD2	0.0012	kg-m2		
35	Balancing	Half Key			
36	Vibration class	Grade A			
37	Position of terminal box	Top			
38	Terminal box entries; no, dimens.	2xM20			
39	Number of power terminals	6			
40	Direction of rotation	CW or CCW			
41	Weight of rotor	2	kg		
42	Total weight of motor	11	kg		
43					

Variant Codes / Definition
332 = Baldor catalog number

Remarks:

Data based on situation 4/4/2012
All data subject to tolerances in accordance with IEC
Guaranteed values on request

