


REVISION HISTORY		
REV	ECM #	DATE/INITIAL
A	1008031	8-19-10/GO-DD

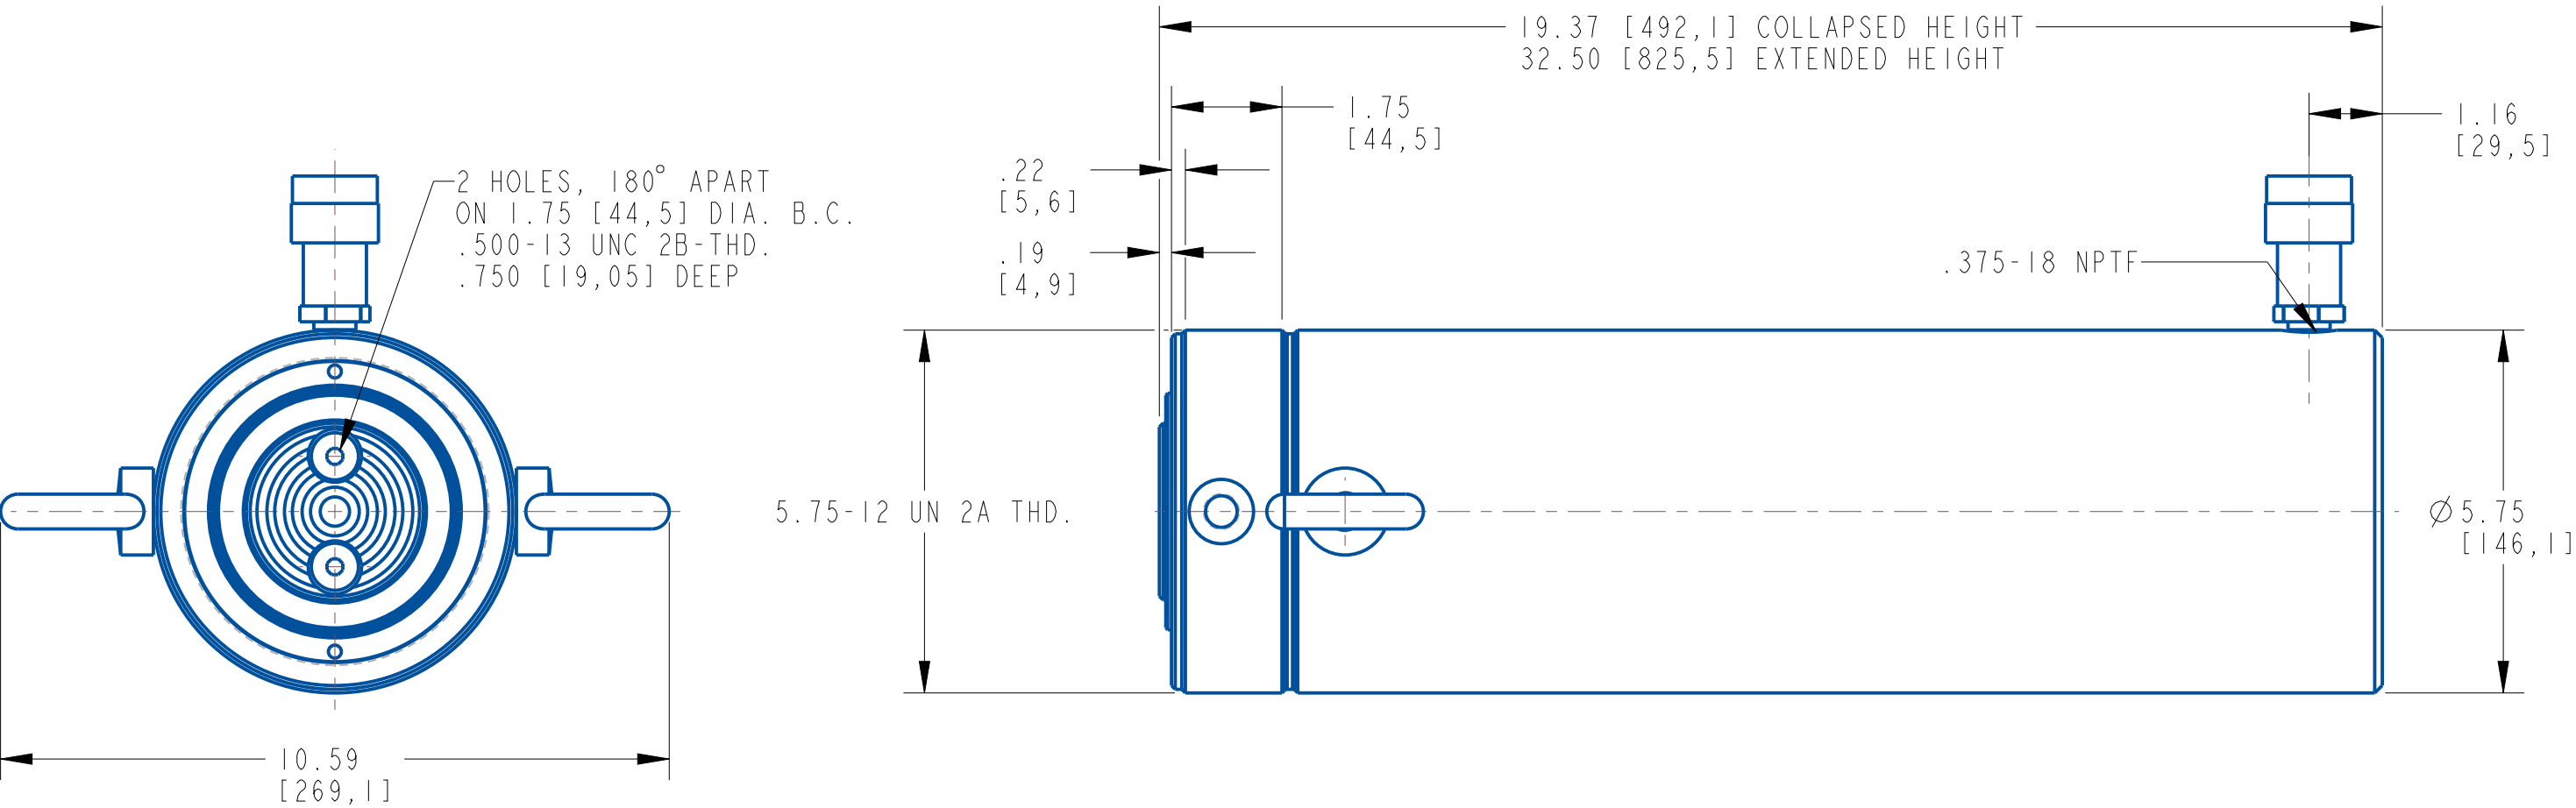

SPECIFICATIONS:

CAPACITY - 75 TONS [68,1 METRIC TONS]
 STROKE - 13.12 IN. [333,2 mm]
 EFFECTIVE AREA - 15.90 IN.² [102,5 cm²]
 OIL CAPACITY - 208.6 IN.³ [3420 cm³]
 BORE DIA. - 4.50 IN. [114,3 mm]
 PLUNGER DIA. - 3.75 IN. [95,3 mm]
 INT. PRESS. AT CAP. - 9,430 PSI [65031,75 kN/m²]
 SHIPPING WEIGHT - 141 LBS [64,0 kg]
 SPRING RETURN PLUNGER

SPECIFICATION

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMALS METRIC .XX ± X.X ± .XXX ± X.XX ± ANGLES ± DO NOT SCALE DRAWING				DATE		ENERPAC®					
FINISH UNLESS SPECIFIED				DRAWN BY: GO		8-19-10							
✓ Roμ [Roμm] IN [mm]				APPROVALS		DATE		TITLE 75 TON CYLINDER RC7513					
		CHECKER: DD		8-19-10									
MATERIAL:				ENGR: DD		8-19-10		SIZE		DWG NO. 1D11214			
FINISH:				THIS PRINT AND INFORMATION HEREIN IS CONFIDENTIAL AND PROPRIETARY AND IS THE PROPERTY OF ENERPAC. IT IS NOT TO BE COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION.				B					
TREATMENT:								SCALE		3:8		DWG FORMAT	
								Pro/E		1 of 1		A.3	