
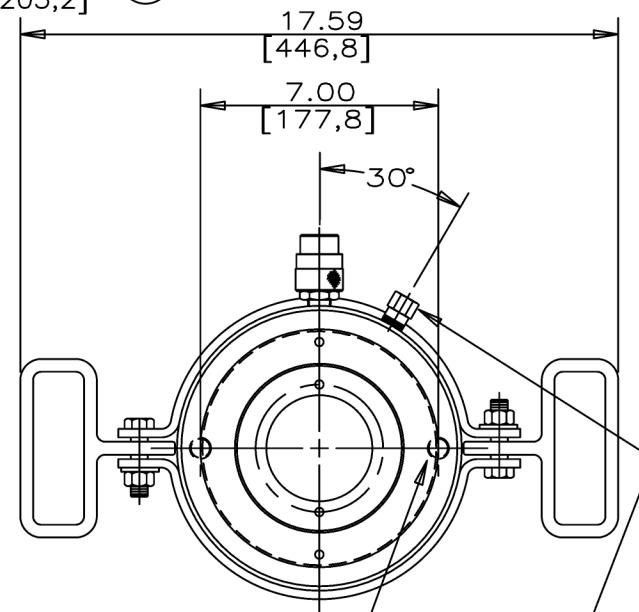


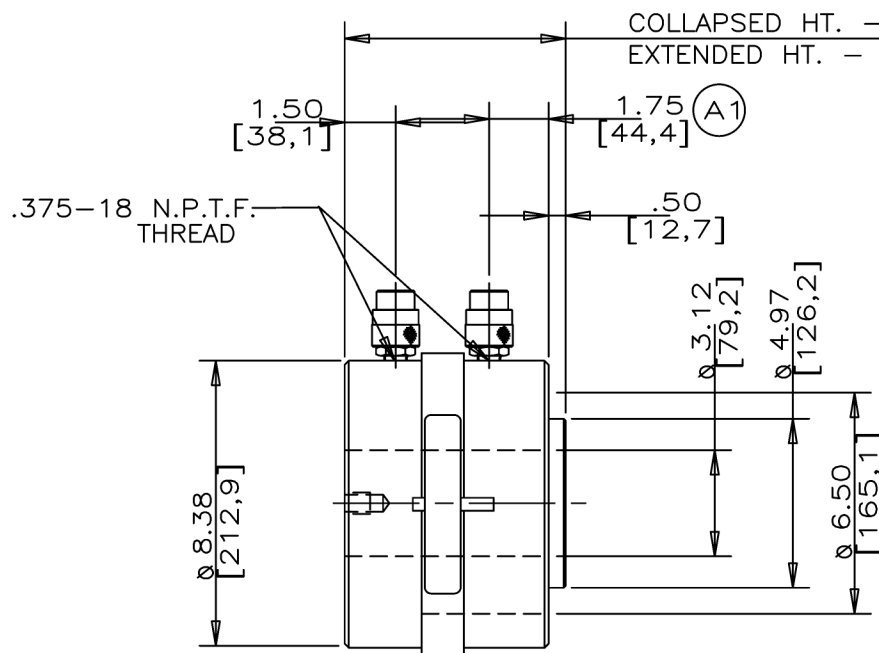

CAPACITY PUSH - 100 TONS [90,8 METRIC TONS]
 CAPACITY PULL - 67.7 TONS [61,5 METRIC TONS]
 STROKE - 1.50 IN. [38,1 MM]
 OIL CAPACITY PUSH - 30.92 CU. IN. [506,68 CM³]
 OIL CAPACITY PULL - 20,32 CU. IN. [332,98 CM³]
 EFFECTIVE AREA PUSH - 20.61 SQ. IN. [132,97 CM²]
 EFFECTIVE AREA PULL - 13.54 SQ. IN. [87,36 CM²]
 INTERNAL PRESSURE AT CAPACITY PUSH - 9704 P.S.I. [669 BAR]
 INTERNAL PRESSURE AT CAPACITY PULL - 10,000 P.S.I. [689 BAR]
 PLUNGER DIA. - 5.00 IN. [127,0 MM]
 SHIPPING WEIGHT -85 LBS. [38,6 KGS.]

PRH0201 RELEASED 6-11-91 "A1" REV. 2.00[50,8] TO 1.75[44,4] "A2" REV. 7.12[180,3] TO 6.50[165,1] REV. 8.02[218,9] TO 8.00[203,2] 6-10-91	DATE	DIMMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
	CHANGES	Specification Sheet		 		DESCRIPTION 100 TON HOLL-O CYL.	
	ECO	MODEL NO. RRH 1001-4		DR. GJK	DATE 7-18-90	DRAWING NO. ID3412	
				CH. GJB	DATE 7-1-91	DWG. SIZE B	