
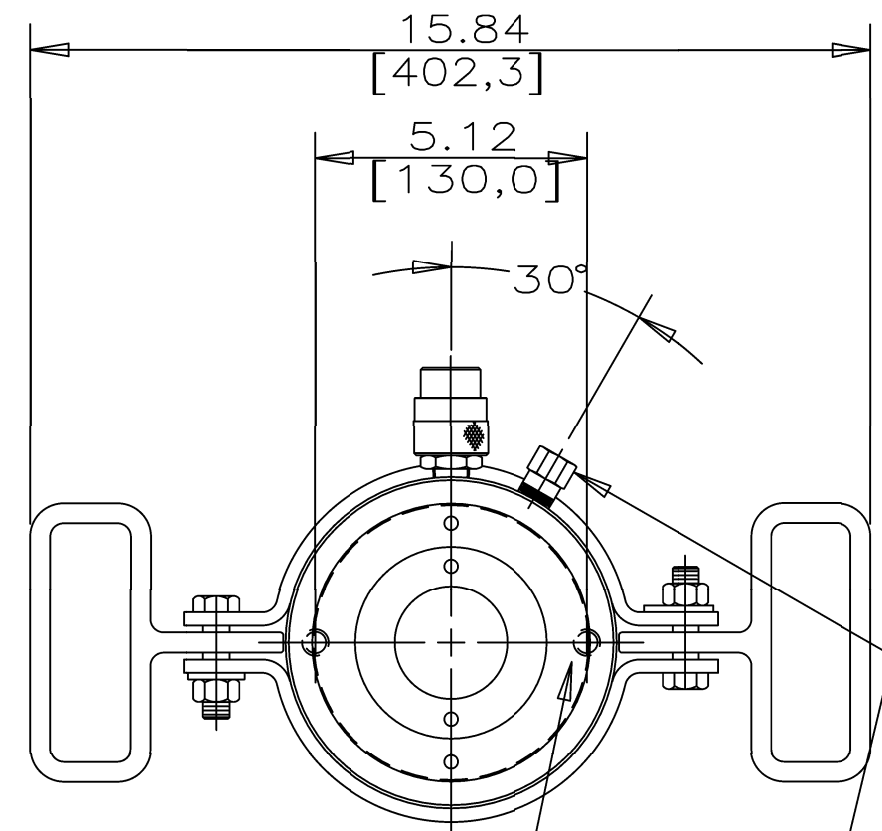
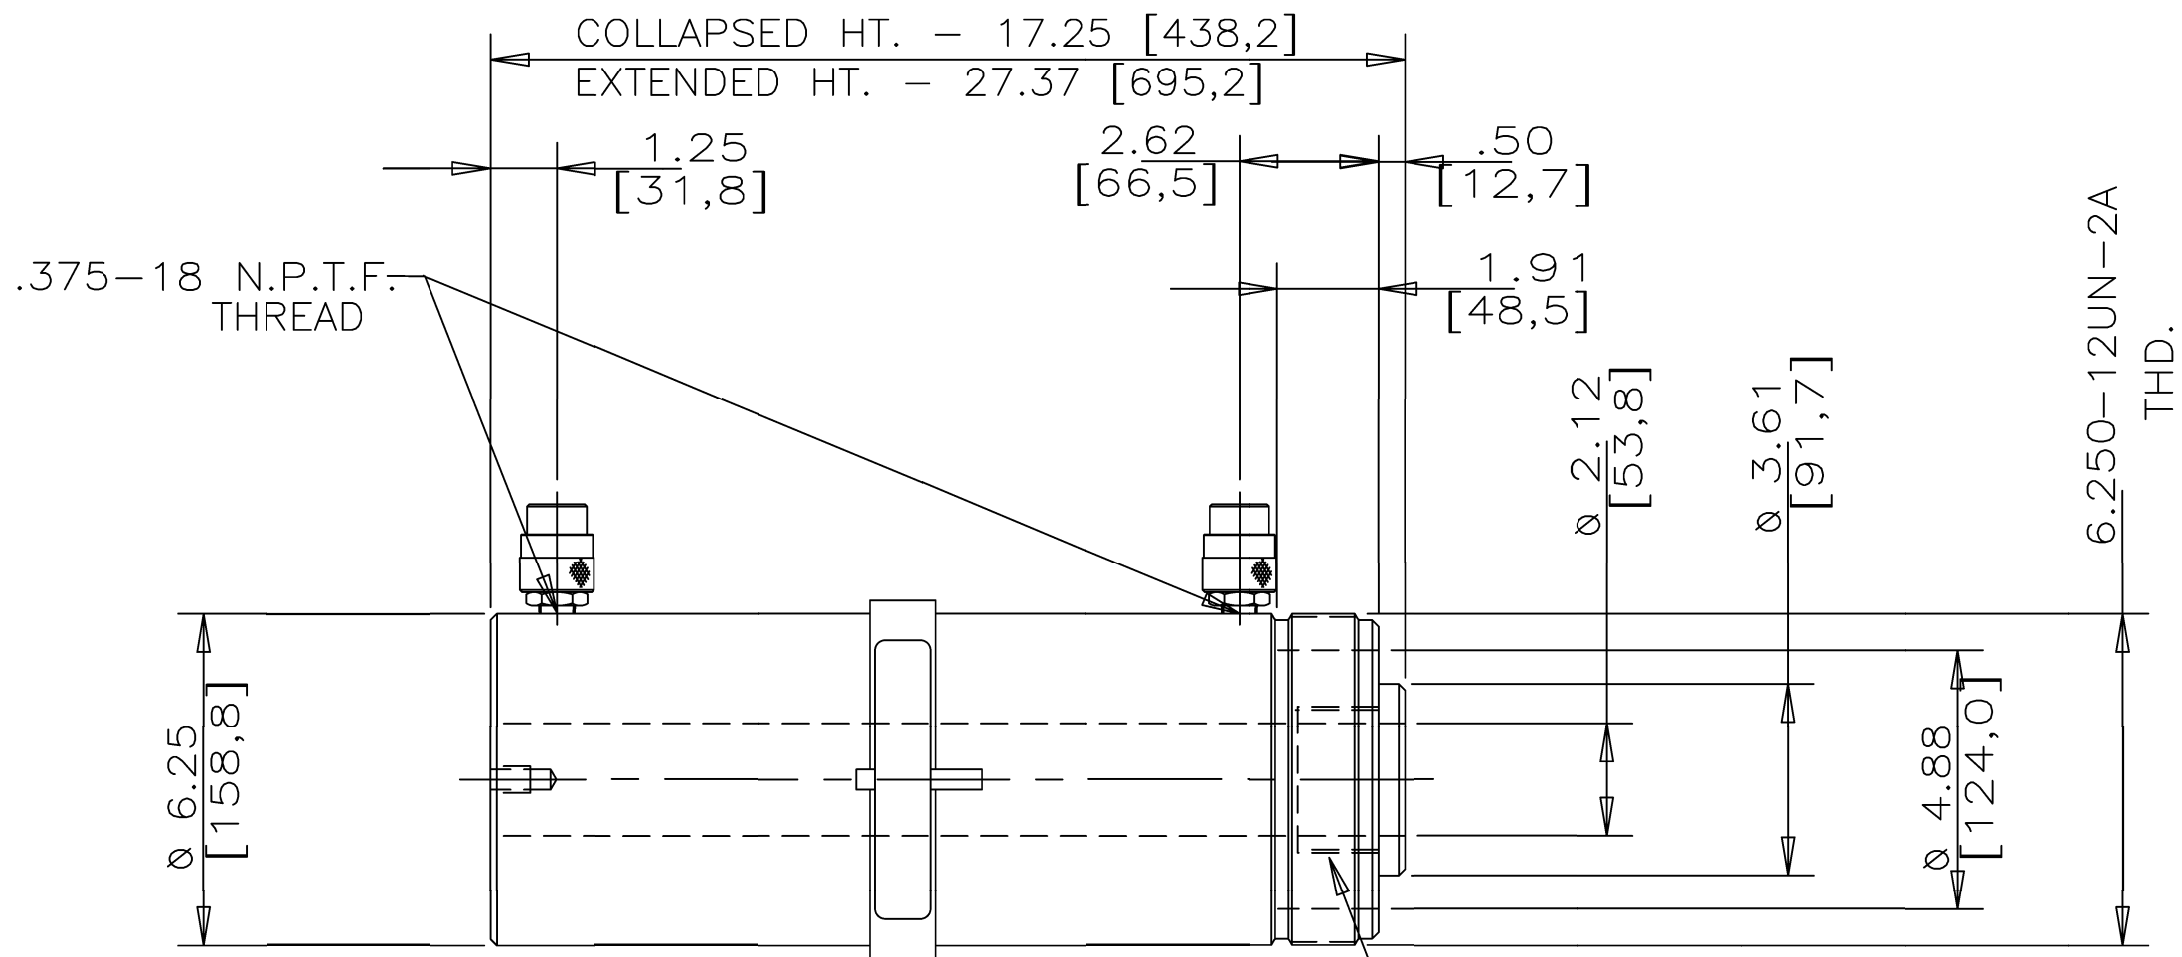




CAPACITY PUSH - 60 TONS [54,5 METRIC TONS]
 CAPACITY PULL - 41.8 TONS [38,0 METRIC TONS]
 STROKE - 10.12 IN. [257,0 MM]
 OIL CAPACITY PUSH - 128.83 CU. IN. [2111,1 CM³]
 OIL CAPACITY PULL - 84.75 CU. IN. [1388,8 CM³]
 EFFECTIVE AREA PUSH - 12.73 SQ. IN. [82,1 CM²]
 EFFECTIVE AREA PULL - 8.37 SQ. IN. [54,0 CM²]
 INTERNAL PRESSURE AT CAPACITY PUSH - 9427 P.S.I. [650 BAR]
 INTERNAL PRESSURE AT CAPACITY PULL - 10,000 P.S.I. [689 BAR]
 PLUNGER DIA. - 3.62 IN. [91,9 MM]
 SHIPPING WEIGHT - 101 LBS. [45,8 KGS.]

PRH90202 RELEASED 6-11-91	DATE	DIMMENSIONS IN BRACKETS ARE IN [mm]		ENERPAC 		13000 WEST SILVER SPRING DR. BUTLER, WISCONSIN 53007	
	CHANGES	Specification Sheet				DESCRIPTION 60 TON HOLL-O CYL.	
	ECO	MODEL NO. RRH 6010-4		DR. GJK	DATE 7-18-90	DRAWING NO. ID3474	D11088 B
				CH. GJB	DATE 9-3-91		