

ABB BALDOR RELIANCE III

Customer information packet

EM4104T-12

30HP, 1760RPM, 3PH, 60HZ, 286T, 1056M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	286T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	NEMA PREMIUM (OLD LOGO) CURUSEEV NEMA PREMIUM
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	72.000 A @ 230.0 V 36.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part Detail

Revision	Z
Type	AC
Mech. spec.	10C151
Base	
Status	PRD/A
Elec. spec.	10WGY773
Layout	10LYC151
Eff. date	01-07-2026
CD Diagram	CD0104
Poles	04
Leads	12#8
Proprietary	False
Created date	08-03-2010

High Voltage Full Load Amps	36.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	12 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1056M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	27.76 IN
Power Factor	85
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3443L													
CAT.NO.	EM4104T-12				CUST. P/N				ENCL				TEFC
SPEC.	10C151Y773G1		CC	010A	FRAME	286T		SER.NO.					
HP	30			CLASS	F	HZ	60						
R.P.M.	1760			PH	3	DES	A						
VOLTS	230/460				CODE	H		ODE BRG	6309	DE BRG	6311		
AMPS	72/36												
RATING	40C AMB-CONT			NEMA NOM. EFF.			93.6		GREASE	POLYREX EM			
P.F.	85	SER.F.	1.15		VPWM INVERTER READY								
HTR-VOLTS	HTR-AMPS			HTR-WATTS									

AC Induction Motor Performance Data

Record # 31378

Typical performance - not guaranteed values

Winding: 10WGY773-R001			Type: 1056M		Enclosure: TEFC		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		30		Full Load Torque		88.8 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		72/36		Breakdown Torque		298 LB-FT	
R.P.M.		1760		Pull-up Torque		124 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		156 LB-FT	
NEMA Design Code		B	KVA Code	H	Starting Current		238 A
Service Factor (S.F.)		1.15		No-load Current		14 A	
NEMA Nom. Eff.		93.6	Power Factor	85	Line-line Res. @ 25°C		0.22 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		65°C	
S.F. Amps				Temp. Rise @ S.F. Load		79°C	
				Locked-rotor Power Factor		31	
				Rotor inertia		4.47 LB-FT2	

Load Characteristics 460 V, 60 Hz, 30 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	49	72	80	85	86	87	86
Efficiency	88.4	92.5	93.5	93.6	92.9	92	93.1
Speed	1792	1787	1781	1774	1767	1758	1770
Line amperes	16.2	21.2	28.2	35.5	44	54.1	40.6


ABB Motors and Mechanical Inc.


WINDING # 10WGY773


Typical performance - not guaranteed values.

30 HP 3 PH 60 HZ 1760 RPM 460 V 1056M

TORQUES (LB-FT): PO=298 PU=124 LR=156 LRA=238

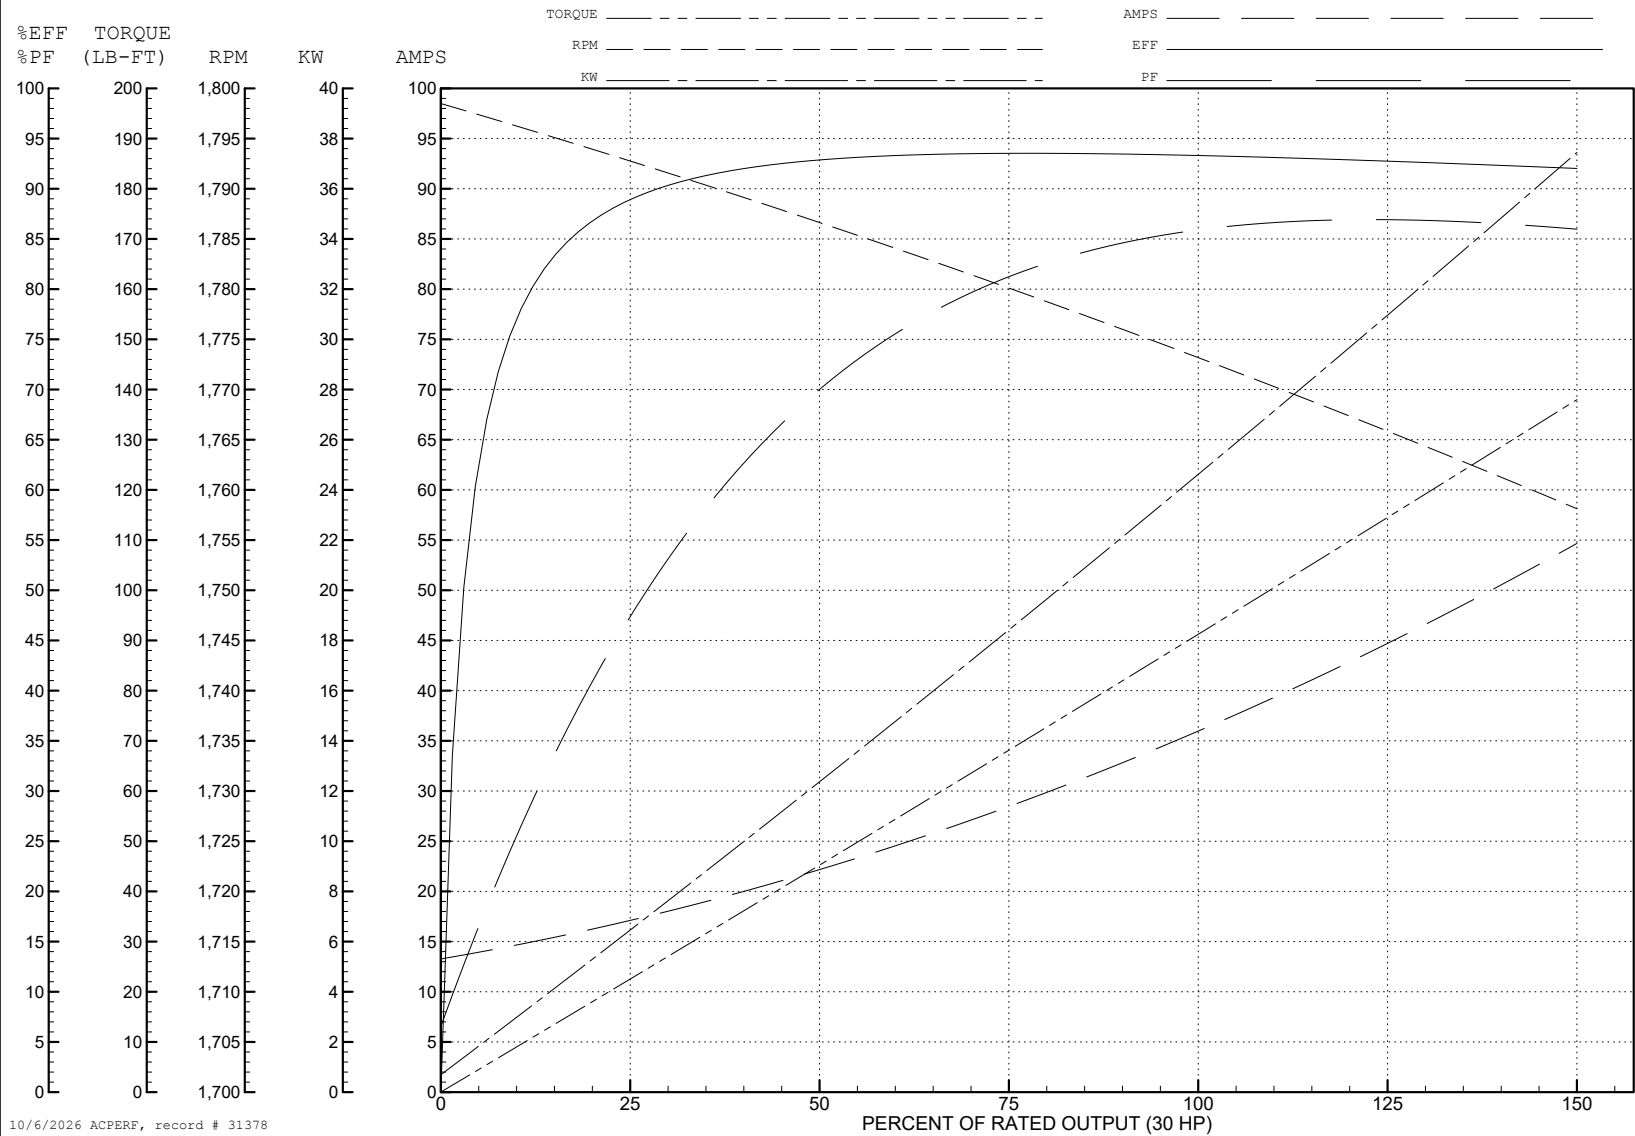

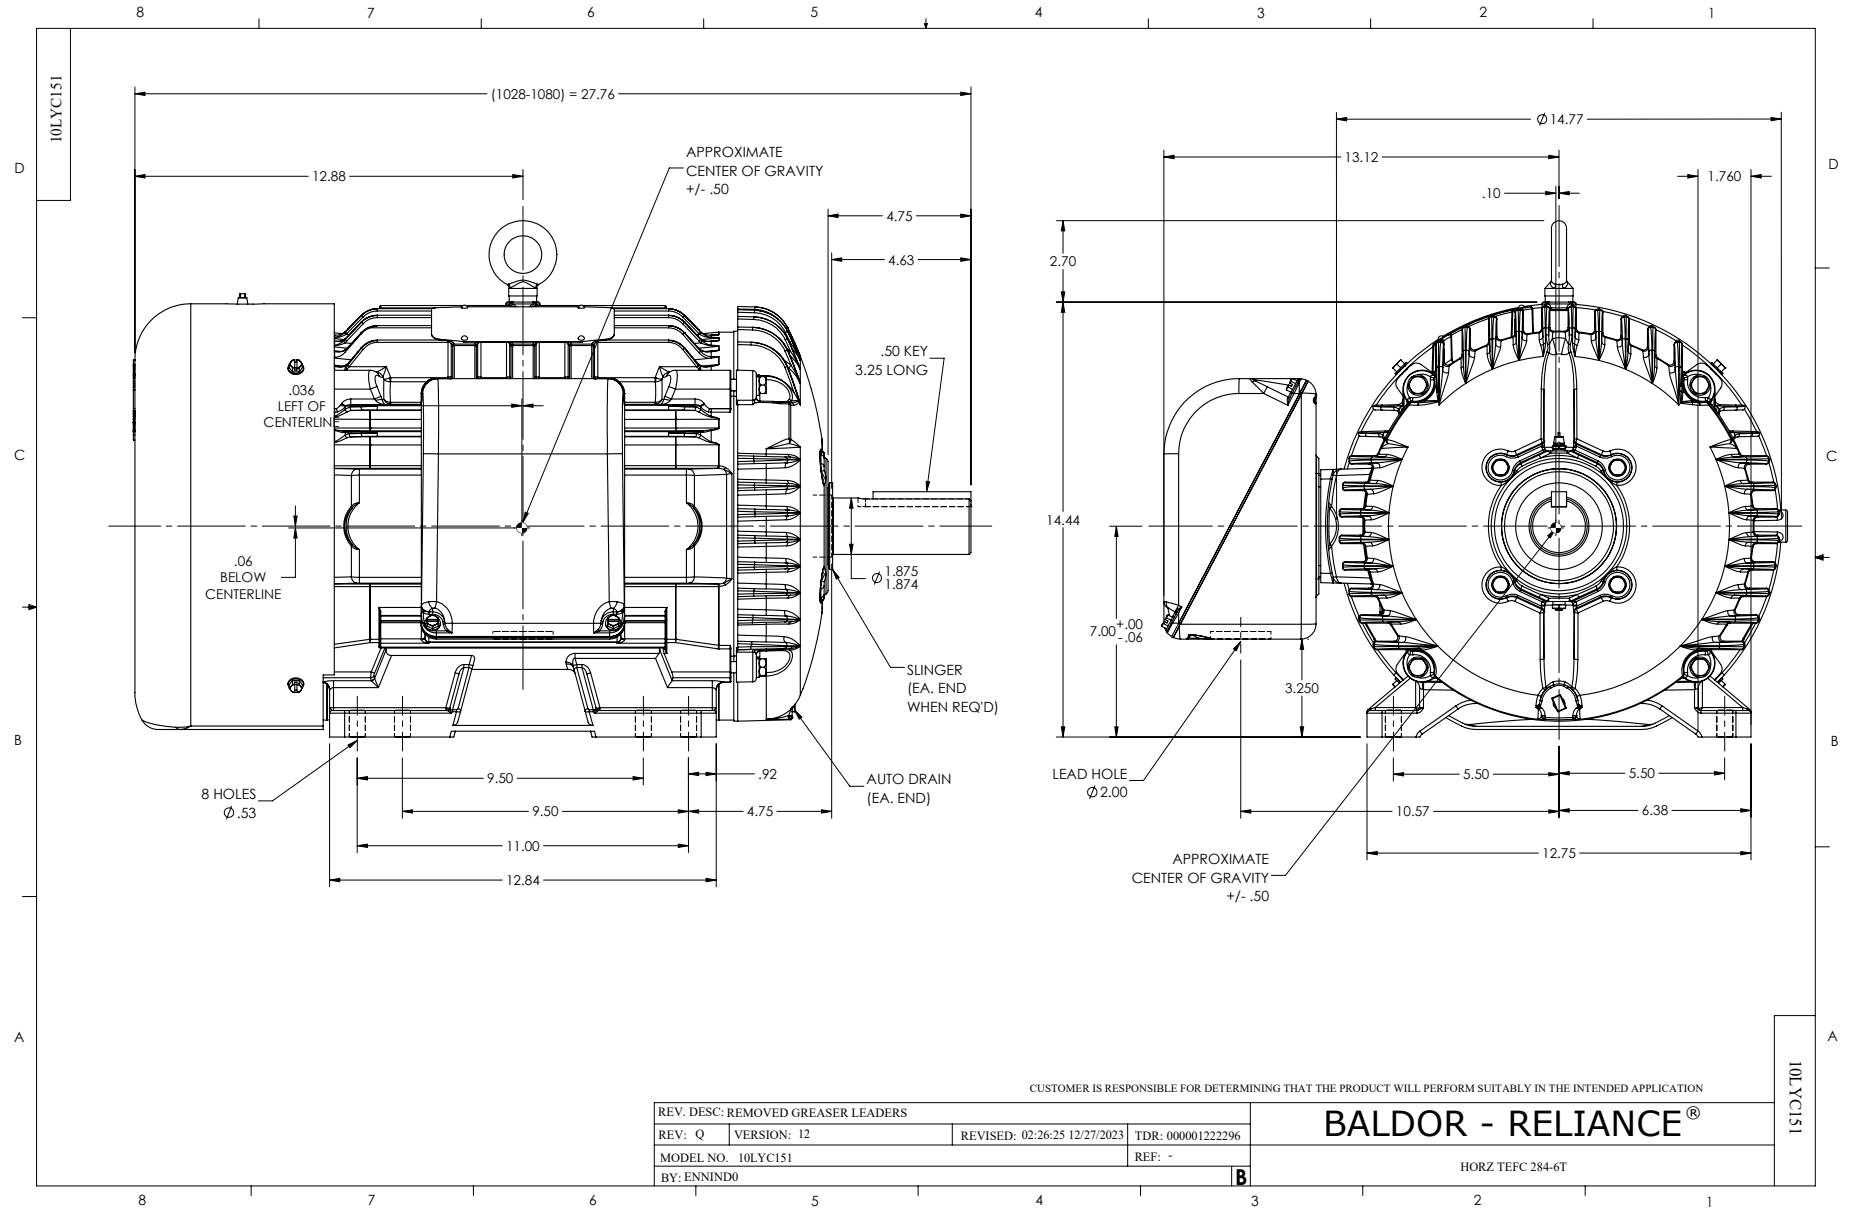

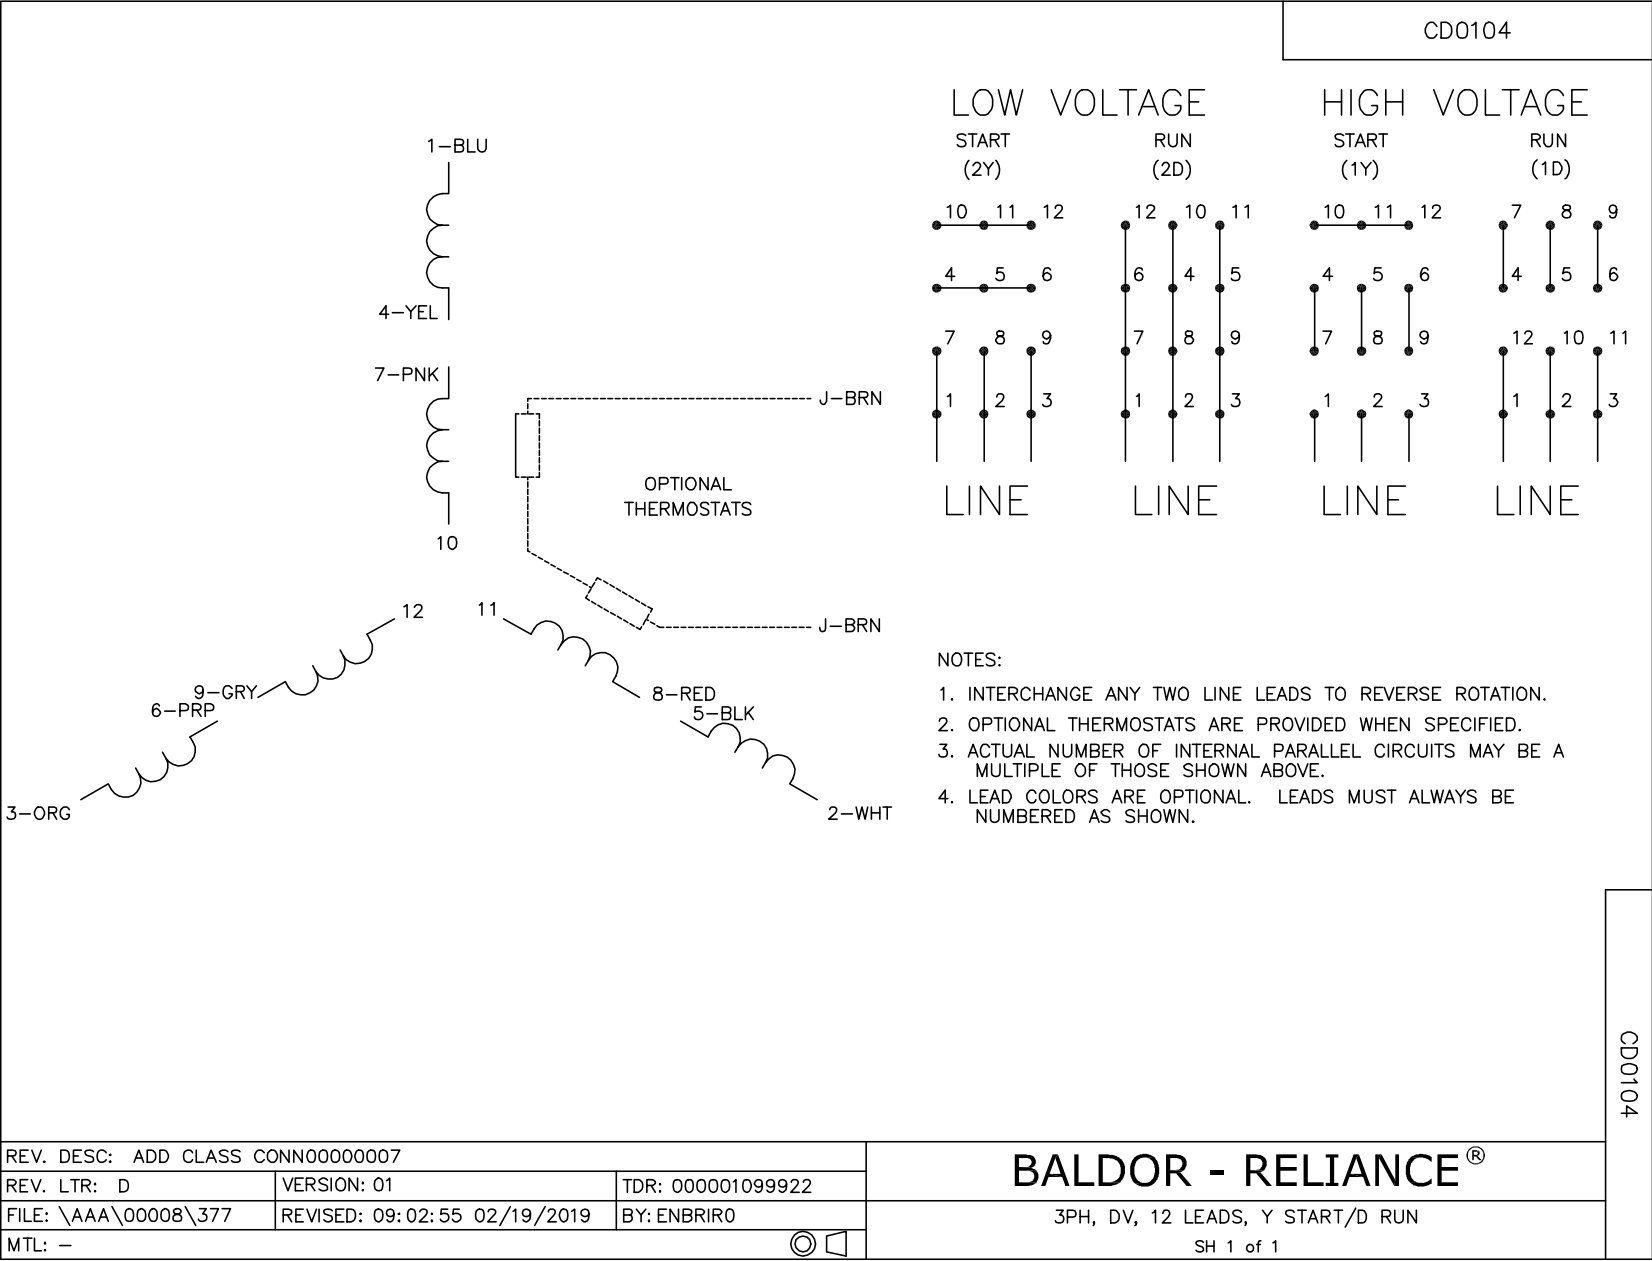

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00008\377

REVISED: 09:02:55 02/19/2019

BY: ENBRIR0

MTL: —

BALDOR - RELIANCE®

3PH, DV, 12 LEADS, Y START/D RUN

SH 1 of 1

CD0104